



# www.philips.com/welcome

ΕN	User manual	1
	Customer care and warranty	21
	Troubleshooting & FAQs	27



# Table of Contents

1.	Important	1
	1.1 Safety precautions and maintenance	1
	1.2 Notational Descriptions	2
	1.3 Disposal of product and packing	
	material	3
2.	Setting up the monitor	4
	2.1 Installation	
	<ul><li>2.2 Operating the monitor</li><li>2.3 Remove Base Stand and Base</li></ul>	
	2.5 Nemove base Stand and base	/
3.	Image Optimization	Q
5.	3.1 SmartContrast	
		0
4.	Technical Specifications	9
	4.1 Resolution & Preset Modes	
5.	Power Management	12
	5	
6.	Regulatory Information	13
7.	Customer care and warrant	15
	7.1 Philips' Flat Panel Monitors Pixel	
	Defect Policy	
	7.2 Customer Care & Warranty	.17
-		
8.	Troubleshooting & FAQs	
	8.1 Troubleshooting	
	8.2 General FAQs	.ZZ

# 1. Important

This electronic user's guide is intended for anyone who uses the Philips monitor. Take time to read this user manual before you use your monitor. It contains important information and notes regarding operating your monitor.

The Philips guarantee applies provided the product is handled properly for its intended use, in accordance with its operating instructions and upon presentation of the original invoice or cash receipt, indicating the date of purchase, dealer's name and model and production number of the product.

# 1.1 Safety precautions and maintenance

# Warnings

Use of controls, adjustments or procedures other than those specified in this documentation may result in exposure to shock, electrical hazards and/or mechanical hazards.

Read and follow these instructions when connecting and using your computer monitor.

# Operation

- Please Keep the monitor out of direct sunlight, very strong bright lights and away from any other heat source. Lengthy exposure to this type of environment may result in discoloration and damage to the monitor.
- Remove any object that could fall into ventilation holes or prevent proper cooling of the monitor's electronics.
- Do not block the ventilation holes on the cabinet.
- When positioning the monitor, make sure the power plug and outlet are easily accessible.
- If turning off the monitor by detaching the power cable or DC power cord, wait for 6 seconds before attaching the power cable or DC power cord for normal operation.

- Please use approved power cord provided by Philips all the time. If your power cord is missing, please contact with your local service center. (Please refer to Customer Care Consumer Information Center)
- Do not subject the monitor to severe vibration or high impact conditions during operation.
- Do not knock or drop the monitor during operation or transportation.

# Maintenance

- To protect your monitor from possible damage, do not put excessive pressure on the LCD panel. When moving your monitor, grasp the frame to lift; do not lift the monitor by placing your hand or fingers on the LCD panel.
- Unplug the monitor if you are not going to use it for an extensive period of time.
- Unplug the monitor if you need to clean it with a slightly damp cloth. The screen may be wiped with a dry cloth when the power is off. However, never use organic solvent, such as, alcohol, or ammonia-based liquids to clean your monitor.
- To avoid the risk of shock or permanent damage to the set, do not expose the monitor to dust, rain, water, or excessive moisture environment.
- If your monitor gets wet, wipe it with dry cloth as soon as possible.
- If foreign substance or water gets in your monitor, please turn the power off immediately and disconnect the power cord. Then, remove the foreign substance or water, and send it to the maintenance center.
- Do not store or use the monitor in locations exposed to heat, direct sunlight or extreme cold.
- In order to maintain the best performance of your monitor and use it for a longer lifetime, please use the monitor in a location that falls within the following temperature and humidity ranges.

- Temperature: 0-40°C 32-95°F
- Humidity: 20-80% RH

# Important information for Burn-in/Ghost image

Always activate a moving screen saver ٠ program when you leave your monitor unattended. Always activate a periodic screen refresh application if your monitor will display unchanging static content. Uninterrupted display of still or static images over an extended period may cause "burn in", also known as "after-imaging" or "ghost imaging", on your screen. "Burn-in", "after-imaging", or "ghost imaging" is a well-known phenomenon in LCD panel technology. In most cases, the "burned in" or "after-imaging" or "ghost imaging" will disappear gradually over a period of time after the power has been switched off.

# **Warning**

Failure to activate a screen saver, or a periodic screen refresh application may result in severe" burn-in" or "after-image" or "ghost image" symptoms will not disappear and cannot be repaired. The damage mentioned above is not covered under your warranty.

# Service

- The casing cover should be opened only by qualified service personnel.
- If there is any need for any document for repair or integration, please contact with your local service center. (please refer to the chapter of "Consumer Information Center")
- For transportation information, please refer to "Technical Specifications".
- Do not leave your monitor in a car/trunk under direct sun light.

# Solution Note

Consult a service technician if the monitor does not operate normally, or you are not sure what procedure to take when the operating instructions given in this manual have been followed.

# 1.2 Notational Descriptions

The following subsections describe notational conventions used in this document.

# Notes, Cautions and Warnings

Throughout this guide, blocks of text may be accompanied by an icon and printed in bold or italic type. These blocks contain notes, cautions or warnings. They are used as follows:

# 

This icon indicates important information and tips that help you make better use of your computer system.

# Caution

This icon indicates information that tells you how to avoid either potential damage to hardware or loss of data.

# (1) Warning

This icon indicates the potential for bodily harm and tells you how to avoid the problem.

Some warnings may appear in alternate formats and may not be accompanied by an icon. In such cases, the specific presentation of the warning is mandated by the relevant regulatory authority.

# 1.3 Disposal of product and packing material

Waste Electrical and Electronic Equipment-WEEE



This marking on the product or on its packaging illustrates that, under European Directive 2012/19/EU governing used electrical and electronic appliances, this product may not be disposed of with normal household waste. You are responsible for disposal of this equipment through a designated waste electrical and electronic equipment collection. To determine the locations for dropping off such waste electrical and electronic, contact your local government office, the waste disposal organization that serves your household or the store at which you purchased the product.

Your new monitor contains materials that can be recycled and reused. Specialized companies can recycle your product to increase the amount of reusable materials and to minimize the amount to be disposed of.

All redundant packing material has been omitted. We have done our utmost to make the packaging easily separable into mono materials.

Please find out about the local regulations on how to dispose of your old monitor and packing from your sales representative.

# Taking back/Recycling Information for Customers

Philips establishes technically and economically viable objectives to optimize the environmental performance of the organization's product, service and activities.

From the planning, design and production stages, Philips emphasizes the important of making products that can easily be recycled. At Philips, end-of-life management primarily entails participation in national take-back initiatives and recycling programs whenever possible, preferably in cooperation with competitors, which recycle all materials (products and related packaging material) in accordance with all Environmental Laws and taking back program with the contractor company.

Your display is manufactured with high quality materials and components which can be recycled and reused.

To learn more about our recycling program please visit

http://www.philips.com/sites/philipsglobal/ about/sustainability/ourenvironment/ productrecyclingservices.page

# 2. Setting up the monitor

# 2.1 Installation

## 1 Package contents
















Adapter


Display design may differ from that illustrated

# 2 Install base stand


 Place the monitor face down on soft and smooth surface taking care to avoid scratching or damaging the screen.



2. Attach the base column with the monitor until it clicks into position.




3. Hold the monitor base stand with both hands and firmly insert the base stand into the base column.



## 3 Connecting to your PC

# 222i6L




- 1 DC power input
- 2 VGA input
- 3 Kensington anti-theft lock

#### Connect to PC


- 1. Connect the power cord to the back of the monitor firmly.
- 2. Turn off your computer and unplug its power cable.
- Connect the monitor signal cable to the video connector on the back of your computer.
- 4. Plug the power cord of your computer and your monitor into a nearby outlet.
- 5. Turn on your computer and monitor. If the monitor displays an image, installation is complete.

# 2.2 Operating the monitor

1 Front view product description



#### Model 222i6L



0	ወ	Switch monitor's power ON and OFF.
2	■/OK	Access the OSD menu. Confirm the OSD adjustment.
8		Return to previous OSD level.
4	Ò.	Adjust the brightness level.
G		Adjust the OSD menu.
6		Change display format.
0	AUTO	Automatically adjust the monitor.

# 2 Description of the On Screen Display

# What is On-Screen Display (OSD)?

On-Screen Display (OSD) is a feature in all Philips LCD monitors. It allows an end user to adjust screen performance or select functions of the monitors directly through an on-screen instruction window. A user friendly on screen display interface is shown as below:

## Model 222i6L:

	Picture Format	•
Picture	Brightness	•
	Contrast	•
Color	SmartContrast	•
	Gamma	•
Language		•
OSD Settings		•
- OSD Settings		•
		•
		•


# Basic and simple instruction on the control keys

In the OSD shown above, you can press ▼ ▲ buttons at the front bezel of the monitor to move the cursor, and press **OK** button to confirm the choice or change.

# The OSD Menu

Below is an overall view of the structure of the On-Screen Display. You can use this as a reference when you want to work your way around the different adjustments later on.

Main menu Sub menu

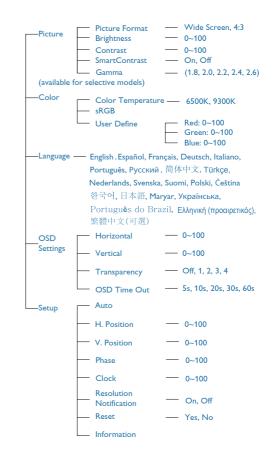


## 3 Resolution notification

This monitor is designed for optimal performance at its native resolution, 1920  $\times$  1080 @ 60 Hz. When the monitor is powered on at a different resolution, an alert is displayed on screen: Use 1920  $\times$  1080 @ 60 Hz for best results.

Display of the native resolution alert can be switched off from Setup in the OSD (On Screen Display) menu.

4 Physical Function

#### Tilt




# 2.3 Remove Base Stand and Base


# 1 Remove the Base Stand

Before you start disassembling the monitor base, please follow the instructions below to avoid any possible damage or injury.

 Place the monitor face down on a smooth surface, taking care to avoid scratching or damaging the screen.



2. Press the locking clips to detach the base stand away from the base column.



3. Press the release button to detach the base column.



# 3. Image Optimization

# 3.1 SmartContrast

# 1 What is it?

A unique technology that dynamically analyzes displayed content and automatically optimizes an LCD monitor's contrast ratio for maximum visual clarity and viewing enjoyment, stepping up backlighting for clearer, crisper and brighter images or dimming backlighting for clear display of images on dark backgrounds.

# 2 Why do I need it?

You want the very best visual clarity and viewing comfort for every type of content. SmartContrast dynamically controls contrast and adjusts backlighting for clear, crisp, bright gaming and video images or displays clear, readable text for office work. By reducing your monitor's power consumption, you save on energy costs and extend the lifetime of your monitor.

# 3 How does it work?

When you activate SmartContrast, it will analyse the content you are displaying in real time to adjust colors and control backlight intensity. This function will dynamically enhance contrast for a great entertainment experience when viewing videos or playing games.

# 4. Technical Specifications

Monitor Panel TypeTFT-LCDBacklightLEDPanel Size21.5"W (54.6 cm)Aspect Ratio16.9Pixel Pitch0.248 × 0.248 mmBrightness220 cd/m²SmartContrast10,000,000:1Contrast Ratio (typ.)600:1Response Time (typ.)5msOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYESConnectivitySeparate Sync, Sync on GreenConvenienceAUTO/▼ ¶/▲ 🏹/▲ ≧/OK 🕐User ConvenienceAUTO/▼ ¶/▲ 🏹/▲ ≧/OK 🕐User ConvenienceKensington LockPlug & Play CompatibilityDDC/cI, sRGB, Windows 8/7, Mac OSX, LinuxStand00W (typ.), 24W (max)Sleep (Standby)0.5WOff0.5WProduct with stand (W×H×D)510 × 313 × 39 mmProduct with stand (W×H×D)510 × 313 × 39 mmProduct with stand (W×H×D)550 × 378 × 109 mmProduct with stand (W×H×D)550 × 378 × 109 mm	Picture/Display					
BacklightLEDPanel Size21.5" W (54.6 cm)Aspect Ratio16.9Pixel Pitch0.248 × 0.248 mmBrightness220 cd/m²SmartContrast10.000,000:1Contrast Ratio (typ.)600.1Response Time (typ.)5msOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRCBYESConnectivitySignal InputVGASeparate Sync, Sync on GreenConvenienceAuto/▼ • ¶/▲  @/▲  @/OK  @User ConvenienceAuto/▼ • ¶/▲  @/▲  @/OK  @Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTTit $-5 / + 20$ PowerOn ModeOn Mode20W (typ.), 24 W (max)Sleep (Standby)0.5WOff0.5WOff0.5WOrdOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V.2.5ADimension510 × 389 × 207 mmProduct with stand (W×H×D)510 × 389 × 207 mmProduct with stand510 × 313 × 39 mmProduct with stand510 × 318 × 109 mm		TFT-LCD				
Panel Size $21.5" W (54.6 cm)$ Aspect Ratio16.9Pixel Pitch $0.248 \times 0.248 mm$ Brightness220 cd/m²SmartContrast $10,000,000.1$ Contrast Ratio (typ.)600.1Response Time (typ.)5msOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 55° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzSRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAUTO/ I/A I/A I/A I/A I/A I/A I/A I/A I/A I/	/1					
Aspect Ratio16.9Pixel Pitch0.248 × 0.248 mmBrightness220 cd/m²SmartContrast10.000,000:1Contrast Ratio (typ.)600:1Response Time (typ.)5msOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ $C/R > 10$ ;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAuTo/▼ $\P/A$ $@/A$ $@/A$ $@/A$ User ConvenienceAuTo/▼ $\P/A$ $@/A$ $@/A$ $@/A$ OSD LanguagesEnglish, French, German, Spanish, Italian, Russian, Signified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/Cl, sRGB, Windows 8/7, Mac OSX, LinuxStandTTilt-5 / +20PowerOn ModeOn Mode20W (typ.), 24 W (max.)Sleep (standby)0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Product with stand (W×H×D)510× 389 × 207 mmProduct with stand (W×H×D)510× 313 × 39 mmProduct without stand (W×H×D)550 × 378 × 109 mm	<u>v</u>	21.5" W (54.6 cm)				
Brightness220 cd/m²SmartContrast10,000,000:1Contrast Ratio (typ.)600:1Response Time (typ.)SmsOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAUTO/▼ II/▲ 🔅 / I User ConvenienceAUTO/▼ II/▲ 🄅 / I OSD LanguagesFinglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTiltTilt-5 / +20PowerOn ModeOM Mode20W (typ.), 24W (max)Sleep (Standby)0,5WOff0,5WOff0,5WPower LED IndicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionF10× 313 × 39 mmProduct with stand (W×H×D)510 × 313 × 39 mmProduct with stand510 × 313 × 39 mmProduct with stand550 × 378 × 109 mm	Aspect Ratio					
Brightness220 cd/m²SmartContrast10,000,000:1Contrast Ratio (typ.)600:1Response Time (typ.)SmsOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAUTO/▼ II/▲ 🔅 / I User ConvenienceAUTO/▼ II/▲ 🄅 / I OSD LanguagesFinglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTiltTilt-5 / +20PowerOn ModeOM Mode20W (typ.), 24W (max)Sleep (Standby)0,5WOff0,5WOff0,5WPower LED IndicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionF10× 313 × 39 mmProduct with stand (W×H×D)510 × 313 × 39 mmProduct with stand510 × 313 × 39 mmProduct with stand550 × 378 × 109 mm						
SmartContrast10,000,000:1Contrast Ratio (typ.)600:1Response Time (typ.)5msOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAUTO/ VIA $A/A$ @/A @/AOSD LanguagesSimplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTilt11t-5 / +20PowerOn ModeQOW (typ.), 24 W (max)Sleep (Standby)0.5WOnff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuit-out, 12V, 2.5ADimensionF10 × 313 × 39 mmProduct with stand (W×H×D)510 × 318 × 109 mmProduct with stand (W×H×D)550 × 378 × 109 mm		220 cd/m <sup>2</sup>				
Response Time (typ.)5msOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30KHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceUser ConvenienceAUTO / VI/A $\langle \cdot / \langle \cdot \rangle \rangle$ OSD LanguagesSimplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDCL; sRGB, Windows 8/7, Mac OSX, LinuxStandTiltoff0.5WOrf0.5WOff0.5WOrf0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionS10 × 313 × 39 mmProduct with stand (W×H×D)510 × 378 × 109 mmProduct package (W×H×D)550 × 378 × 109 mm		10,000,000:1				
Response Time (typ.)5msOptimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ C/R > 10;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30KHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceUser ConvenienceAUTO / VI/A $\langle \cdot / \langle \cdot \rangle \rangle$ OSD LanguagesSimplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDCL; sRGB, Windows 8/7, Mac OSX, LinuxStandTiltoff0.5WOrf0.5WOff0.5WOrf0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionS10 × 313 × 39 mmProduct with stand (W×H×D)510 × 378 × 109 mmProduct package (W×H×D)550 × 378 × 109 mm	Contrast Ratio (typ.)					
Optimum Resolution1920 × 1080 @ 60HzViewing Angle90° (H) / 65° (V) @ $C/R > 10$ ;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceUser ConvenienceAUTO / $I_{I} / (I_{I} ) (I_{I} )$		5ms				
Viewing Angle90° (H) / 65° (V) @ $C/R > 10$ ;Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceUser ConvenienceAUTO/ I/A $?/$ $O/$ $O/$ OSD LanguagesEnglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTiltTilt-5 / +20PowerOn Mode20W (typ.), 24 W (max.)Sleep (Standby)0.5WOff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimension510 × 389 × 207 mmProduct without stand (W×H×D)510 × 313 × 39 mmProduct without stand (W×H×D)550 × 378 × 109 mm		1920 × 1080 @ 60Hz				
Display Colors16.7MVertical Refresh Rate56Hz - 76HzHorizontal Frequency30kHz - 83kHzsRGBYEsConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAUTO/▼ •¶/▲ ♀/◀ ●/OK ♥User ConvenienceAUTO/▼ •¶/▲ ♀/◀ ●/OK ♥OSD LanguagesEnglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTilt-5 / +20PowerOn Mode20W (typ.), 24W (max.)Sleep (Standby)0.5WOff0.5WOrewer LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionProduct without stand (W×H×D)510 × 389 × 207 mmProduct without stand (W×H×D)510 × 378 × 109 mm						
Vertical Refresh Rate $56Hz - 76Hz$ Horizontal Frequency $30kHz - 83kHz$ sRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenience $III/ \ II/ \ II/ \ III / \ IIII / \ IIIII / \ IIII / \ IIII / \ IIII / \ IIIIIIII$						
SRGBYESConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAUTO/VILAUser ConvenienceAUTO/VILAOSD LanguagesEnglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandIt-5 / +20PowerOn ModeOn Mode20W (typ.), 24 W (max.)Sleep (Standby)0.5WOff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionFroduct with stand (W×H×D)Product without stand (W×H×D)510 × 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm		56Hz - 76Hz				
ConnectivitySignal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceUser ConvenienceAUTO/VILA $\dot{Q}/4$ $\blacksquare/OK$ $\dot{Q}$ OSD LanguagesEnglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTilt-5 / +20PowerOn Mode20W (typ.), 24 W (max.)Sleep (Standby)0.5WOff0.5WOm mode: White, Standby/Sleep mode: White (blinking)Power LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimension510 × 313 × 39 mmProduct without stand (W×H×D)510 × 378 × 109 mm	Horizontal Frequency	30kHz - 83kHz				
Signal InputVGAInput SignalSeparate Sync, Sync on GreenConvenienceAUT0/▼ II/A ☆/< II/A @/A OKUser ConvenienceAUT0/▼ II/A ☆/< II/A OK	/	YES				
Input SignalSeparate Sync, Sync on GreenConvenience $UJO/V I/A \dot{V} I/A \dot{V} I O/K \dot{V}$ User ConvenienceAUTO/V I/A \dot{V} I O/A \dot{V} I A \dot{V} I O/A \dot{V} I	Connectivity					
ConvenienceAUTO/V $\[ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ $	Signal Input	VGA				
User ConvenienceAUTO / ▼ IQ / ▲ ♀/ ▲ ♀/ ▲ ●/OK ●OSD LanguagesEnglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStand	Input Signal	Separate Sync, Sync on Green				
OSD LanguagesEnglish, French, German, Spanish, Italian, Russian, Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/Cl, sRGB, Windows 8/7, Mac OSX, LinuxStand-5 / +20PowerOn ModeOn Mode20W (typ.), 24 W (max.)Sleep (Standby)0.5WOff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimension510 × 389 × 207 mmProduct with stand (W×H×D)510 × 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm	Convenience					
OSD LanguagesSimplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil Portuguese, Traditional Chinese(optional)Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStand-5 / +20Power-0n ModeOn Mode20W (typ.), 24W (max.)Sleep (Standby)0.5WOff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimension510 × 389 × 207 mmProduct without stand (W×H×D)510 × 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm	User Convenience	auto/▼ •⊄/▲ ☆/◀ 🗐/0K 🕛				
Other ConvenienceKensington LockPlug & Play CompatibilityDDC/CI, sRGB, Windows 8/7, Mac OSX, LinuxStandTilt-5 / +20PowerOn Mode20W (typ.), 24W (max.)Sleep (Standby)0.5WOff0.5WOff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimension510× 389 × 207 mmProduct with stand (W×H×D)510× 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm	OSD Languages	Simplified Chinese, Portuguese, Turkish, Dutch, Swedish, Finnish, Polish, Czech, Korean, Japanese, Hungarian, Ukraine, Brazil				
Plug & Play CompatibilityDDC/Cl, sRGB, Windows 8/7, Mac OSX, LinuxStand-Tilt-5 / +20Power-On Mode20W (typ.), 24W (max.)Sleep (Standby)0.5WOff0.5WOff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimension-Product with stand (W×H×D)510× 389 × 207 mmProduct package (W×H×D)550 × 378 × 109 mm	Other Convenience	Kensington Lock				
StandTilt $-5 / +20$ Power $0$ On Mode $20W$ (typ.), 24 W (max.)Sleep (Standby) $0.5W$ Off $0.5W$ Off $0.5W$ Power LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionProduct with stand (W×H×D) $510\times 389 \times 207 \text{ mm}$ Product without stand (W×H×D) $510\times 313 \times 39 \text{ mm}$ Product package (W×H×D) $550\times 378 \times 109 \text{ mm}$	Plug & Play Compatibility	*				
PowerOn Mode $20W$ (typ.), 24W (max.)Sleep (Standby) $0.5W$ Off $0.5W$ Off $0.5W$ Power LED indicator $On mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionProduct with stand (W×H×D)510\times 389 \times 207 \text{ mm}Product without stand(W×H×D)510\times 313 \times 39 \text{ mm}Product package (W×H×D)550\times 378 \times 109 \text{ mm}$						
On Mode $20W$ (typ.), $24W$ (max.)Sleep (Standby) $0.5W$ Off $0.5W$ Power LED indicator $\bigcirc$ mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, $12V$ , $2.5A$ DimensionProduct with stand (W×H×D) $510\times 389 \times 207$ mmProduct without stand (W×H×D) $510\times 313 \times 39$ mmProduct package (W×H×D) $550\times 378 \times 109$ mm	Tilt	-5 / +20				
Sleep (Standby)       0.5W         Off       0.5W         Power LED indicator       On mode: White, Standby/Sleep mode: White (blinking)         Power Supply       Built-out, 12V, 2.5A         Dimension       Froduct with stand (W×H×D)         Product without stand (W×H×D)       510× 389 × 207 mm         Product without stand (W×H×D)       510 × 313 × 39 mm         Product package (W×H×D)       550 × 378 × 109 mm	Power					
Sleep (Standby)0.5WOff0.5WPower LED indicatorOn mode: White, Standby/Sleep mode: White (blinking)Power SupplyBuilt-out, 12V, 2.5ADimensionProduct with stand (W×H×D)510× 389 × 207 mmProduct without stand (W×H×D)510× 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm	On Mode	20W (typ.), 24 W (max.)				
Power LED indicator     On mode: White, Standby/Sleep mode: White (blinking)       Power Supply     Built-out, 12V, 2.5A       Dimension     Froduct with stand (W×H×D)       Product without stand (W×H×D)     510× 389 × 207 mm       Product without stand (W×H×D)     510 × 313 × 39 mm       (W×H×D)     550 × 378 × 109 mm	Sleep (Standby)					
Power SupplyBuilt-out, 12V, 2.5ADimensionFroduct with stand (W×H×D)510× 389 × 207 mmProduct without stand (W×H×D)510 × 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm	Off	0.5W				
Power SupplyBuilt-out, 12V, 2.5ADimensionFroduct with stand (W×H×D)510× 389 × 207 mmProduct without stand (W×H×D)510 × 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm						
Product with stand (W×H×D)510× 389 × 207 mmProduct without stand (W×H×D)510 × 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm	Power LED indicator	On mode: White, Standby/Sleep mode: White (blinking)				
Product without stand (W×H×D)510 × 313 × 39 mmProduct package (W×H×D)550 × 378 × 109 mm						
(W×H×D)         510 × 313 × 39 mm           Product package (W×H×D)         550 × 378 × 109 mm	Power Supply					
Product package (W×H×D) 550 × 378 × 109 mm	Power Supply Dimension	Built-out, 12V, 2.5A				
	Power Supply Dimension Product with stand (W×H×D) Product without stand	Built-out, 12V, 2.5A 510× 389 × 207 mm				
	Power Supply Dimension Product with stand (W×H×D) Product without stand (W×H×D)	Built-out, 12V, 2.5A         510× 389 × 207 mm         510 × 313 × 39 mm				

4. Technical Specifications

Product with stand	2.82kg
Product without stand	2.61kg
Operating Condition	
Temperature range (operation)	0°C to 40 °C
Temperature range	-20°C to 60°C
(Non-operation)	-20 C 10 80 C
Relative humidity	20% to 80%
MTBF	30,000hrs
Environmental	
Environmental ROHS	YES
	YES 100% recyclable
ROHS	
ROHS Packaging	
ROHS Packaging Compliance and standards	100% recyclable
ROHS Packaging Compliance and standards Regulatory Approvals	100% recyclable

# 

- 1. EPEAT Gold or Silver is valid only where Philips registers the product. Please visit <u>www.epeat.net</u> for registration status in your country.
- 2. This data is subject to change without notice. Go to <u>www.philips.com/support</u> to download the latest version of leaflet.
- 3. Smart response time is the optimum value from either GtG or GtG (BW) tests.

# 4.1 Resolution & Preset Modes

# 1 Maximum Resolution

1920 × 1080 @ 60 Hz (analog input) 1920 × 1080 @ 60 Hz (digital input)

#### 2 Recommended Resolution

1920 × 1080 @ 60 Hz (digital input)

H. freq (kHz)	Resolution	V. freq (Hz)
31.47	720 × 400	70.09
31.47	640 × 480	59.94
35.00	640 × 480	66.67
37.86	640 × 480	72.81
37.50	640 × 480	75.00
37.88	800 × 600	60.32
46.88	800 × 600	75.00
48.36	1024 × 768	60.00
60.02	1024 × 768	75.03
44.77	1280 × 720	59.86
63.89	1280 × 1024	60.02
79.98	1280 × 1024	75.03
55.94	1440 × 900	59.89
70.64	1440 × 900	74.98
65.29	1680 × 1050	59.95
67.50	1920 × 1080	60.00

# B Note

Please notice that your display works best at native resolution of  $1920 \times 1080$  @ 60Hz. For best display quality, please follow this resolution recommendation.

# 5. Power Management

If you have VESA DPM compliance display card or software installed in your PC, the monitor can automatically reduce its power consumption when not in use. If an input from a keyboard, mouse or other input device is detected, the monitor will 'wake up' automatically.The following table shows the power consumption and signaling of this automatic power saving feature:

# 222i6L:

Power Management Definition							
VESA Mode	Video	H-sync	V-sync	Power Used	LED Color		
Active	ON	Yes	Yes	20 W (typ.) 24W (max.)	White		
Sleep (Standby)	OFF	No	No	< 0.5W (typ.)	White (blink)		
Switch Off	OFF	-	-	< 0.5W (typ.)	OFF		

The following setup is used to measure power consumption on this monitor.

- Native resolution: 1920 × 1080
- Contrast: 50%
- Brightness: 300 nits or 200 nits
- Color temperature: 6500k with full white pattern

# Note

This data is subject to change without notice.

# 6. Regulatory Information

# Lead-free Product



Lead free display promotes environmentally sound recovery and disposal of waste from electrical and electronic equipment. Toxic

substances like Lead has been eliminated and compliance with European community's stringent RoHs directive mandating restrictions on hazardous substances in electrical and electronic equipment have been adhered to in order to make Philips monitors safe to use throughout its life cycle.

# E-Waste Declaration for India



This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment . The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environ-ment. For more information about where you can drop off your waste equipment for recycling in India please visit the below web link.

http://www.india.philips.com/about/sustainability/ recycling/index.page

# China RoHS

The People's Republic of China released a regulation called "Management Methods for Controlling Pollution by Electronic Information Products" or commonly referred to as China RoHS. All products including CRT and Monitor which are produced and sold for China market have to meet China RoHS request.

#### 中国大陆RoHS

根据中国大陆《电子信息产品污染控制管理办法》(也称为中国大陆RoHS),以下部分列出了本产品中可能 包含的有毒有害物质或元素的名称和含量


#### 本表适用之产品

显示器(液晶及CRT)

#### 有毒有害物质或元素

	有毒有害物质或元素					
部件名称	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
外壳	0	0	0	0	0	0
CRT显示屏	Х	0	0	0	0	0
液晶显示屏/灯管	Х	0	0	0	0	0
电路板组件*	Х	0	0	0	0	0
电源适配器	Х	0	0	0	0	0
电源线/连接线	Х	0	0	0	0	0
*:电路板组件包括印刷电路板及其构成的零部件,如电阻、电容、集成电路、连接器等 C:表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T26572-2011规定的限量要求以下						
X:表示该有毒有害物质至少在该部件的某一均质材料中的含量超出						

CB/T26572-2011规定的限量要求:但是上表中打"×"的部件,符合欧 盟RoHS法规要求(属于豁免的部分)




此标识指期限(十年),电子信息产品中含有的有毒有害物 质或元素在正常使用的条件下不会发生外泄或突变,电 子信息产品用户使用该电子信息产品不会对环境造成严 重污染或对其人身、财产造成严重损害的期限. 《废弃电器电子产品回收处理管理条例》提示性 说明

为了更好地关爱及保护地球,当用户不再需要此产品或 产品寿命终止时,请遵守国家废弃电器电子产品回收处 理相关法律法规,将其交给当地具有国家认可的回收处 理资质的厂商进行回收处理。

# 7. Customer care and warrant

# 7.1 Philips' Flat Panel Monitors Pixel Defect Policy

Philips strives to deliver the highest quality products. We use some of the industry's most advanced manufacturing processes and practice stringent quality control. However, pixel or sub pixel defects on the TFT Monitor panels used in flat panel monitors are sometimes unavoidable. No manufacturer can guarantee that all panels will be free from pixel defects, but Philips guarantees that any monitor with an unacceptable number of defects will be repaired or replaced under warranty. This notice explains the different types of pixel defects and defines acceptable defect levels for each type. In order to gualify for repair or replacement under warranty, the number of pixel defects on a TFT Monitor panel must exceed these acceptable levels. For example, no more than 0.0004% of the sub pixels on a monitor may be defective. Furthermore, Philips sets even higher quality standards for certain types or combinations of pixel defects that are more noticeable than others. This policy is valid worldwide.



# Pixels and Sub pixels


A pixel, or picture element, is composed of three sub pixels in the primary colors of red, green and blue. Many pixels together form an image. When all sub pixels of a pixel are lit, the three colored sub pixels together appear as a single white pixel. When all are dark, the three colored sub pixels together appear as a single black pixel. Other combinations of lit and dark sub pixels appear as single pixels of other colors.

# Types of Pixel Defects


Pixel and sub pixel defects appear on the screen in different ways. There are two categories of pixel defects and several types of sub pixel defects within each category.

# Bright Dot Defects

Bright dot defects appear as pixels or sub pixels that are always lit or 'on'.That is, a bright dot is a sub-pixel that stands out on the screen when the monitor displays a dark pattern.There are the types of bright dot defects.



One lit red, green or blue sub pixel.



Two adjacent lit sub pixels:

- Red + Blue = Purple
- Red + Green = Yellow
- Green + Blue = Cyan (Light Blue)




Three adjacent lit sub pixels (one white pixel).

# Note

A red or blue bright dot must be more than 50 percent brighter than neighboring dots while a green bright dot is 30 percent brighter than neighboring dots.


# Black Dot Defects

Black dot defects appear as pixels or sub pixels that are always dark or 'off'. That is, a dark dot is a sub-pixel that stands out on the screen when the monitor displays a light pattern. These are the types of black dot defects.



# **Proximity of Pixel Defects**

Because pixel and sub pixels defects of the same type that are near to one another may be more noticeable, Philips also specifies tolerances for the proximity of pixel defects.



# **Pixel Defect Tolerances**

In order to qualify for repair or replacement due to pixel defects during the warranty period, a TFT Monitor panel in a Philips flat panel monitor must have pixel or sub pixel defects exceeding the tolerances listed in the following tables.

BRIGHT DOT DEFECTS	ACCEPTABLE LEVEL
1 lit subpixel	3
2 adjacent lit subpixels	1
3 adjacent lit subpixels (one white pixel)	0
Distance between two bright dot defects*	>15mm
Total bright dot defects of all types	3
BLACK DOT DEFECTS	ACCEPTABLE LEVEL
1 dark subpixel	5 or fewer
2 adjacent dark subpixels	2 or fewer
3 adjacent dark subpixels	0
Distance between two black dot defects*	>15mm
Total black dot defects of all types	5 or fewer
TOTAL DOT DEFECTS	ACCEPTABLE LEVEL
Total bright or black dot defects of all types	5 or fewer

# Note

- 1. 1 or 2 adjacent sub pixel defects = 1 dot defect
- 2. This monitor is ISO9241-307 compliant.(ISO9241-307: Ergonomic requirement , analysis and compliance test methods for electronic visual displays)
- 3. ISO9241-307 is the successor of formerly known ISO13406 standard, which is withdrawn by the International Organisation for Standardisation (ISO) per: 2008-11-13.

# 7.2 Customer Care & Warranty

For warranty coverage information and additional support requirement valid for your region, please visit www.philips.com/support website for details. You may also contact your local Philips Customer Care Center number listed below.

0	000	· · · · · · · · · · · · · · · · · · ·	D :	
Country	CSP	Hotline Number	Price	Opening hours
Austria	RTS	+43 0810 000206	€ 0.07	Mon to Fri : 9am - 6pm
Belgium	Ecare	+32 078 250851	€ 0.06	Mon to Fri : 9am - 6pm
Cyprus	Alman	800 92 256	Free of charge	Mon to Fri : 9am - 6pm
Denmark	Infocare	+45 3525 8761	Local call tariff	Mon to Fri : 9am - 6pm
Finland	Infocare	+358 09 2290 1908	Local call tariff	Mon to Fri : 9am - 6pm
France	Mainteq	+33 082161 1658	€ 0.09	Mon to Fri : 9am - 6pm
Germany	RTS	+49 01803 386 853	€ 0.09	Mon to Fri : 9am - 6pm
Greece	Alman	+30 00800 3122 1223	Free of charge	Mon to Fri : 9am - 6pm
Ireland	Celestica	+353 01 601 1161	Local call tariff	Mon to Fri : 8am - 5pm
Italy	Anovo Italy	+39 840 320 041	€ 0.08	Mon to Fri : 9am - 6pm
Luxembourg	Ecare	+352 26 84 30 00	Local call tariff	Mon to Fri : 9am - 6pm
Netherlands	Ecare	+31 0900 0400 063	€ 0.10	Mon to Fri : 9am - 6pm
Norway	Infocare	+47 2270 8250	Local call tariff	Mon to Fri : 9am - 6pm
Poland	MSI	+48 0223491505	Local call tariff	Mon to Fri : 9am - 6pm
Portugal	Mainteq	800 780 902	Free of charge	Mon to Fri : 8am - 5pm
Spain	Mainteq	+34 902 888 785	€ 0.10	Mon to Fri : 9am - 6pm
Sweden	Infocare	+46 08 632 0016	Local call tariff	Mon to Fri : 9am - 6pm
Switzerland	ANOVO CH	+41 02 2310 2116	Local call tariff	Mon to Fri : 9am - 6pm
United Kingdom	Celestica	+44 0207 949 0069	Local call tariff	Mon to Fri : 8am - 5pm

## Contact Information for WESTERN EUROPE region:

# Contact Information for CENTRAL AND EASTERN EUROPE region:

Country Call center CSP		Consumer care number	
Belarus	N/A	IBA	+375 17 217 3386 +375 17 217 3389
Bulgaria	N/A	LAN Service	+359 2 960 2360
Croatia	N/A	MR Service Ltd	+385 (01) 640 1111
Czech Rep.	N/A	Asupport	420 272 188 300
Estonia	N/A	FUJITSU	+372 6519900(General) +372 6519972(workshop)
Georgia	N/A	Esabi	+995 322 91 34 71
Hungary	N/A	Profi Service	+36 1 814 8080(General) +36 1814 8565(For AOC&Philips only)
Kazakhstan	N/A	Classic Service I.I.c.	+7 727 3097515
Latvia	N/A	ServiceNet LV	+371 67460399 +371 27260399
Lithuania	N/A	UAB Servicenet	+370 37 400160(general) +370 7400088 (for Philips)
Macedonia	N/A	AMC	+389 2 3125097
Moldova	N/A	Comel	+37322224035
Romania	N/A	Skin	+40 21 2101969
Russia	N/A	CPS	+7 (495) 645 6746
Serbia&Montenegro	N/A	Kim Tec d.o.o.	+381 11 20 70 684
Slovakia	N/A	Datalan Service	+421 2 49207155
Slovenia	N/A	PC H.and	+386 1 530 08 24
the republic of Belarus	N/A	ServiceBy	+ 375 17 284 0203
Turkey	N/A	Tecpro	+90 212 444 4 832
Ukraine	N/A	Topaz	+38044 525 64 95
	N/A	Comel	+380 5627444225

# Contact Information for LATIN AMERICA region:

Country	Call center	Consumer care number
Brazil	Vermont	0800-7254101
Argentina		0800 3330 856

# Contact Information for China:

Country	Call center	Consumer care number
China	PCCW Limited	4008 800 008

# Contact Information for NORTH AMERICA :

Country	Call center	Consumer care number
U.S.A.	EPI - e-center	(877) 835-1838
Canada	EPI - e-center	(800)479-6696

# Contact Information for APMEA region:

Country	ASP	Consumer care number	Opening hours
Australia	AGOS NETWORK PTY LTD	1300 360 386	Mon.~Fri. 9:00am-5:30pm
New Zealand	Visual Group Ltd.	0800 657447	Mon.~Fri. 8:30am-5:30pm
Hong Kong Macau	Company: Smart Pixels Technology Ltd.	Hong Kong: Tel: +852 2619 9639 Macau: Tel: (853)-0800-987	Mon.~Fri. 9:00am-6:00pm Sat. 9:00am-1:00pm
India	REDINGTON INDIA LTD	Tel: 1 800 425 6396 SMS: PHILIPS to 56677	Mon.~Fri. 9:00am-5:30pm
Indonesia	PT. CORMIC SERVISINDO PERKASA	+62-21-4080-9086 (Customer Hotline) +62-8888-01-9086 (Customer Hotline)	Mon.~Thu. 08:30-12:00; 13:00- 17:30 Fri. 08:30-11:30; 13:00-17:30
Korea	Alphascan Displays, Inc	1661-5003	Mon.~Fri. 9:00am-5:30pm Sat. 9:00am-1:00pm
Malaysia	R-Logic Sdn Bhd	+603 5102 3336	Mon.~Fri. 8:15am-5:00pm Sat. 8:30am-12:30am
Pakistan	TVONICS Pakistan	+92-213-6030100	Sun.~Thu. 10:00am-6:00pm
Singapore	Philips Singapore Pte Ltd (Philips Consumer Care Center)	(65) 6882 3966	Mon.~Fri. 9:00am-6:00pm Sat. 9:00am-1:00pm
Taiwan	FETEC.CO	0800-231-099	Mon.~Fri. 09:00 - 18:00
Thailand	Axis Computer System Co., Ltd.	(662) 934-5498	Mon.~Fri. 08:30am~05:30pm
South Africa	Computer Repair Technologies	011 262 3586	Mon.~ Fri. 08:00am~05:00pm
Israel	Eastronics LTD	1-800-567000	Sun.~Thu. 08:00-18:00

Vietnam	FPT Service Informatic Company Ltd Ho Chi Minh City Branch	+84 8 38248007 Ho Chi Minh City +84 5113.562666 Danang City +84 5113.562666 Can tho Province	Mon.~Fri. 8:00-12:00, 13:30-17:30 Sat. 8:00-12:00
Philippines	EA Global Supply Chain Solutions ,Inc.	(02) 655-7777; 6359456	Mon.~Fri. 8:30am~5:30pm
Armenia Azerbaijan Georgia Kyrgyzstan Tajikistan	Firebird service centre	+97 14 8837911	Sun.~Thu. 09:00 - 18:00
Uzbekistan	Soniko Plus Private Enterprise Ltd	+99871 2784650	Mon.~Fri. 09:00 - 18:00
Turkmenistan	Technostar Service Centre	+(99312) 460733, 460957	Mon.~Fri. 09:00 - 18:00
Japan	フィリップスモニター ・サポートセンター	0120-060-530	Mon.~Fri. 10:00 - 17:00

# 8. Troubleshooting & FAQs

# 8.1 Troubleshooting

This page deals with problems that can be corrected by a user. If the problem still persists after you have tried these solutions, contact Philips customer service representative.

# 1 Common Problems

#### No Picture (Power LED not lit)

- Make sure the power cord is plugged into the power outlet and into the back of the monitor.
- First, ensure that the power button on the front of the monitor is in the OFF position, then press it to the ON position.

#### No Picture (Power LED is White)

- Make sure the computer is turned on.
- Make sure the signal cable is properly connected to your computer.
- Make sure the monitor cable has no bent pins on the connect side. If yes, repair or replace the cable.
- The Energy Saving feature may be activated

#### Screen says



- Make sure the monitor cable is properly connected to your computer. (Also refer to the Quick Start Guide).
- Check to see if the monitor cable has bent pins.
- Make sure the computer is turned on.

#### AUTO button doesn't function

• The auto function is applicable only in VGA-Analog mode. If the result is not satisfactory, you can do manual adjustments via the OSD menu.

# Note

The Auto Function is not applicable in DVI-Digital mode as it is not necessary.

#### Visible signs of smoke or sparks

- Do not perform any troubleshooting steps
- Disconnect the monitor from mains power source immediately for safety
- Contact with Philips customer service representative immediately.

# 2 Imaging Problems

#### Image is not centered

- Adjust the image position using the "Auto" function in OSD Main Controls.
- Adjust the image position using the Phase/ Clock of Setup in OSD Main Controls. It is valid only in VGA mode.

#### Image vibrates on the screen

• Check that the signal cable is properly securely connected to the graphics board or PC.

#### Vertical flicker appears



- Adjust the image using the "Auto" function in OSD Main Controls.
- Eliminate the vertical bars using the Phase/ Clock of Setup in OSD Main Controls. It is valid only in VGA mode.

#### Horizontal flicker appears

-	
·	

- Adjust the image using the "Auto" function in OSD Main Controls.
- Eliminate the vertical bars using the Phase/ Clock of Setup in OSD Main Controls. It is valid only in VGA mode.

- Image appears blurred, indistinct or too dark
- Adjust the contrast and brightness on On-Screen Display.

# An "after-image", "burn-in" or "ghost image" remains after the power has been turned off.

- Uninterrupted display of still or static images over an extended period may cause "burn in", also known as "after-imaging " or "ghost imaging", on your screen. "Burnin", "after-imaging", or "ghost imaging" is a well-known phenomenon in LCD panel technology. In most cases, the "burned in" or "after-imaging" or "ghost imaging" will disappear gradually over a period of time after the power has been switched off.
- Always activate a moving screen saver program when you leave your monitor unattended.
- Always activate a periodic screen refresh application if your LCD monitor will display unchanging static content.
- Severe" burn-in" or "after-image" or "ghost image" symptoms will not disappear and cannot be repaired. The damage mentioned above is not covered under your warranty.

# Image appears distorted. Text is fuzzy or blurred.

• Set the PC's display resolution to the same mode as monitor's recommended screen native resolution.

# Green, red, blue, dark, and white dots appears on the screen

 The remaining dots are normal characteristic of the liquid crystal used in today's technology, Please refer the pixel policy for more detail.

# The "power on" light is too strong and is disturbing

• You can adjust "power on" light using the power LED Setup in OSD main Controls.

For further assistance, refer to the Consumer Information Centers list and contact Philips customer service representative.

# 8.2 General FAQs

## Q1: When I install my monitor what should I do if the screen shows 'Cannot display this video mode'?

- Ans.: Recommended resolution for this monitor: 1920 x 1080 @ 60 Hz.
- Unplug all cables, then connect your PC to the monitor that you used previously.
- In the Windows Start Menu, select Settings/ Control Panel. In the Control Panel Window, select the Display icon. Inside the Display Control Panel, select the 'Settings' tab. Under the setting tab, in box labelled 'desktop area', move the sidebar to 1920 × 1080 pixels.
- Open 'Advanced Properties' and set the Refresh Rate to 60 Hz, then click OK.
- Restart your computer and repeat step 2 and 3 to verify that your PC is set at 1920 × 1080 @ 60 Hz.
- Shut down your computer, disconnect your old monitor and reconnect your Philips LCD monitor.
- Turn on your monitor and then turn on your PC.

# Q2: What is the recommended refresh rate for LCD monitor?

**Ans.:** Recommended refresh rate in LCD monitors is 60 Hz, In case of any disturbance on screen, you can set it up to 75 Hz to see if that removes the disturbance.

# Q3: What are the .inf and .icm files on the CD-ROM? How do I install the drivers (.inf and .icm)?

Ans.: These are the driver files for your monitor. Follow the instructions in your user manual to install the drivers. Your computer may ask you for monitor drivers (.inf and .icm files) or a driver disk when you first install your monitor. Follow the instructions to insert the (companion CD-ROM) included in this package.

#### 8. Troubleshooting & FAQs

Monitor drivers (.inf and .icm files) will be installed automatically.

## Q4: How do I adjust the resolution?

- Ans.: Your video card/graphic driver and monitor together determine the available resolutions. You can select the desired resolution under Windows<sup>®</sup> Control Panel with the "Display properties".
- Q5: What if I get lost when I am making monitor adjustments via OSD?
- Ans.: Simply press the OK button, then select 'Reset' to recall all of the original factory settings.

#### Q6: Is the LCD screen resistant to scratches?

Ans.: In general it is recommended that the panel surface is not subjected to excessive shocks and is protected from sharp or blunt objects. When handling the monitor, make sure that there is no pressure or force applied to the panel surface side. This may affect your warranty conditions.

## Q7: How should I clean the LCD surface?

- Ans.: For normal cleaning, use a clean, soft cloth. For extensive cleaning, please use isopropyl alcohol. Do not use other solvents such as ethyl alcohol, ethanol, acetone, hexane, etc.
- Q8: Can I change the color setting of my monitor?
- Ans.: Yes, you can change your color setting through OSD control as the following procedures,
- Press "OK" to show the OSD (On Screen Display) menu
- Press "Down Arrow" to select the option "Color" then press "OK" to enter color setting, there are three settings as below.
  - Color Temperature; The two settings are 6500K and 9300K. With settings in the 6500K range the panel appears "warm, with a red-white color tone", while a 9300K temperature yields "cool, bluewhite toning".

- sRGB; this is a standard setting for ensuring correct exchange of colors between different device (e.g. digital cameras, monitors, printers, scanners, etc)
- User Define; the user can choose his/ her preference color setting by adjusting red, green blue color.

# Note

A measurement of the color of light radiated by an object while it is being heated. This measurement is expressed in terms of absolute scale, (degrees Kelvin). Lower Kevin temperatures such as 2004K are red; higher temperatures such as 9300K are blue. Neutral temperature is white, at 6504K.

# Q9: Can I connect my LCD monitor to any PC, workstation or Mac?

Ans.: Yes. All Philips LCD monitors are fully compatible with standard PCs, Macs and workstations. You may need a cable adapter to connect the monitor to your Mac system. Please contact your Philips sales representative for more information.

#### Q10: Are Philips LCD monitors Plug-and-Play?

Ans.: Yes, the monitors are Plug-and-Play compatible with Windows 8/7/Vista/XP/ NT, Mac OSX, Linux

## Q11: What is Image Sticking, or Image Burn-in, or After Image, or Ghost Image in LCD panels?

Ans.: Uninterrupted display of still or static images over an extended period may cause "burn in", also known as "afterimaging" or "ghost imaging", on your screen. "Burn-in", "after-imaging", or "ghost imaging" is a well-known phenomenon in LCD panel technology. In most cases, the "burned in" or "atter-imaging" or "ghost imaging" will disappear gradually over a

# 8. Troubleshooting & FAQs

period of time after the power has been switched off.

Always activate a moving screen saver program when you leave your monitor unattended. Always activate a periodic screen refresh application if your LCD monitor will display unchanging static content.

# (1) Warning

Failure to activate a screen saver, or a periodic screen refresh application may result in severe "burn-in" or "after-image" or "ghost image" symptoms that will not disappear and cannot be repaired. The damage mentioned above is not covered under your warranty.

- Q12: Why is my Display not showing sharp text, and is displaying jagged characters?
- Ans.: Your LCD monitor works best at its native resolution of 1920 × 1080 @ 60 Hz. For best display, please use this resolution.



© 2014 Koninklijke Philips N.V. All rights reserved.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license from Koninklijke Philips N.V.

Specifications are subject to change without notice.

Version: M6222i10