Registre seu produto e obtenha suporte em

www.philips.com/welcome

CIC Centro de Informações

PHILIPS

Grande SP: 2121-0203

Demás localidades: 0800 701 0203

HTS5123



Manual do Usuário

Manual del usuario

User manual





Responsabilidade Social

A Philips do Brasil LTDA é uma empresa socialmente responsável, preocupada com a valorização dos seus recursos humanos internos, com o relacionamento correto e justo com a comunidade, com o meio ambiente, com o ambiente de trabalho e com o compromisso de cumprimento das leis.

Sendo assim, realiza suas atividades em conformidade com a norma SA-8000, que se baseia nos princípios das convenções da Organização Internacional do Trabalho, da Convenção das Nações Unidas sobre os Direitos da Criança e na Declaração Universal dos Direitos Humanos.

Informação ambiental

Todo o material desnecessário foi retirado da embalagem do produto.

Nós tentamos fazer as embalagens de modo que elas sejam fáceis de separar em três materiais: caixa de papelão (caixa), calços de isopor e sacos plásticos.

O seu sistema contém materiais que podem ser reciclados e usados novamente se desmontados por uma empresa especializada. Por favor, observe os regulamentos locais relacionados à disposição de materiais da embalagem, baterias e equipamentos, com relação à destinação no seu final de vida.

Prezado Consumidor.

PARABÉNS POR TER ADQUIRIDO ESTE PRODUTO...

E REM VINDO À FAMÍLIA PHILIPS.

Agradecemos pela sua confiança na Philips e temos a certeza de que seu Sistema de Home Theater lhe trará muitos momentos agradáveis, pois ele é um produto de tecnologia moderna e com muitos recursos. Para usufruir de todo seu potencial, basta ler atentamente este manual e seguir as orientações dadas.

Atenciosamente.

Philips do Brasil LTDA

Baterias e Pilhas



ADVERTÊNCIA: Cuidados com a utilização e descarte de pilhas e baterias.

- Não descarte as pilhas e baterias juntamente ao lixo doméstico.
- O descarte inadequado de pilhas e baterias pode representar riscos ao meio ambiente e a saúde humana.
- Para contribuir com a qualidade ambiental e com sua saúde, a Philips receberá pilhas e baterias fomecidas com seus produtos após seu fim de vida. A Philips dispõe de pontos de coleta em Assistências Técnicas que auxiliarão neste processo.
- Para evitar o vazamento de pilhas ou baterias, o que pode resultar em danos à saúde, ambientais e ao produto, recomendamos que: (i) Em caso de aparelhos com pilhas removíveis, retire-as quando não estiver em uso por um longo período, (ii) Não misture pilhas (antigas com novas ou de zinco-carbono com alcalinas, etc.) (iii) Não exponha o produto com pilhas/baterias em seu interior a altas temperaturas.
- Em caso de aparelhos com pilhas não removíveis, promover o encaminhamento à assistência técnica Philips.
- Pilhas e bateiras usadas ou inservíveis recebidas pela Philips serão encaminhadas à destinação ambientalmente cometa.
- Em caso de dúvida ou consulta, favor ligar para 0800 701 0203 Brasil ou 2121 0203 Grande São Paulo ou acessar o site http://www.philips.com.br

Programa Ciclo Sustentável Philips – Reciclagem de aparelhos eletro-eletrônicos Philips pós-consumo

O seu produto Philips no final da vida útil pode ser encaminhado a uma de nossas assistências técnicas autorizadas para que tenha um destino ambientalmente adequado já que os equipamentos eletro-eletrônicos não devem ser descartados no lixo comum. O programa também contempla o recolhimento de pilhas e baterias portáteis de qualquer fabricante.

Iniciado em 2008, o Ciclo Sustentável Philips é o primeiro programa corporativo que promove a reciclagem de aparelhos eletro-eletrônicos no país, minimizando os impactos ao meio ambiente. De um lado, a Philips entrega produtos inovadores, sempre focando no compromisso com a sustentabilidade. Do outro lado, você retorna o produto para descarte, fechando um ciclo responsável. A Philips sempre foi pioneira em Sustentabilidade dentre as empresas do seu setor. Com essa iniciativa fortalecemos nossa responsabilidade ambiental e o compromisso com a sociedade.

Para saber quais assistências técnicas autorizadas participam do Programa Ciclo Sustentável, acesse nossa homepage: http://www.sustentabilidade.philips.com.br.

Contents

1	Help and support	2
	FAQs Contact Philips	2
2	Notice Copyright Compliance Mains fuse (UK only) Open source software RMVB end user agreement (Asia Pacific and China only)	2 2 2 3 3
	Trademarks	4
3	Important Safety Care for your product Care of the environment	5 5 5 6
_		
4	Your SoundBar Main unit Remote control	6 6 7
5	Connect your SoundBar Subwoofer Connectors Connect to TV Connect audio from TV and other devices Computers and the Internet Name your SoundBar	8 9 9 10 11 13
6	Use your SoundBar Adjust the volume Choose your sound USB storage devices Audio, video, and picture options Use smartphone Share media through SimplyShare Fasyl ink	13 13 14 14 15 16 18 20

7	Change settings Picture Sound Language Scan your USB storage device DLNA DMR control Energy saving Apply factory settings	21 21 22 23 23 23 23 24
3	Update software Check software version Update software through the Internet Update software through USB	2 ⁴ 2 ⁴ 2 ⁴ 25
7	Product specifications	25
10	Troubleshooting	28
11	Index	29

1 Help and support

Download a software update and find answers to many frequently answered questions (FAQs) on your product at www.philips.com.

FAQs

If you have a problem, refer to the frequently asked questions (FAQs) for this SoundBar at www. philips.com/support.

If you still need help, contact Philips Consumer Care in your country.



Warning

 Do not attempt to repair your SoundBar yourself. This may cause severe injury, irreparable damage to your SoundBar, or void your warranty.

Contact Philips

If you contact Philips, you will be asked for the model and serial number of your product. The model number and serial number are on the back or bottom of your product. Note the numbers before you call Philips:

Model No. _______Serial No.

2 Notice

This section contains the legal and trademark notices.

Copyright



Be responsible Respect copyrights

This item incorporates copy protection technology that is protected by U.S. patents and other intellectual property rights of Rovi Corporation. Reverse engineering and disassembly are prohibited.

Copyright in the UK

Recording and playback of material may require consent. See Copyright Act 1956 and The Performers Protection Acts 1958 to 1972.

Compliance



This product is in compliance with the essential requirements and other relevant provisions of Directives 2006/95/EC (Low Voltage), 2004/108/EC (EMC).



* Wireless and Ethernet LAN functions are authorized for indoor use only.

Hereby, Philips Consumer Lifestyle, declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

A copy of the EC declaration of Conformity is available in the Portable Document Format (PDF) version of the user manual at www.philips.com/support.

Mains fuse (UK only)

This information applies only to products with a UK mains plug.

This product is fitted with an approved molded plug. If you replace the fuse, use one with:

- the ratings shown on the plug,
- a BS 1362 approval, and
- the ASTA approval mark,

Contact your dealer if you are not sure about what type of fuse to use.

Caution: To conform with the EMC directive (2004/108/EC), do not detach the plug from the power cord.

Open source software

Philips Electronics Singapore Pte Ltd hereby offers to deliver, upon request, a copy of the complete corresponding source code for the copyrighted open source software packages used in this product for which such offer is requested by the respective licenses. This offer is valid up to three years after product purchase to anyone in receipt of this information. To obtain source code, please contact open.source@philips.com. If you prefer not to use email or if you do not receive confirmation receipt within a week after mailing to this email address, please write to "Open Source Team, Philips Intellectual Property & Standards, P.O. Box 220, 5600 AE Eindhoven, The Netherlands". If you do not receive timely confirmation of your letter, please email to the email address above. The texts of the licenses and acknowledgements for open source software used in this product are included on a separate leaflet.

RMVB end user agreement (Asia Pacific and China only)

Notes to End User:

By using this product with RealNetworks software and services, the end user agrees to the following terms of REALNETWORKS, INC:

- End User may only use the software for private, non-commercial use in accordance with the terms of RealNetworks EULA.
- End User is not allowed to modify, translate, reverse engineer, decompile, dissemble or use other means to discover the source code or otherwise replicate the functionality of the Real Format Client Code, except to the extent that this restriction is expressly prohibited by applicable law.
- RealNetworks Inc. disclaims all warranties and conditions other than those set forth in this Agreement which are in lieu of all other warranties, whether express and implied, including but not limited to any implied warranties or conditions of merchantability and fitness for a particular purpose; and effectively exclude all liability for indirect, special, incidental and consequential damages, such as but not limited to lost profits.

Trademarks

Android is a trademark of Google Inc. Use of this trademark is subject to Google permissions.



Manufactured under license under U.S. Patent Nos: 5,956,674; 5,974,380; 6,487,535 & other U.S. and worldwide patents issued & pending. DTS, the Symbol, & DTS and the Symbol together are registered trademarks & DTS 2.0+Digital Out is a trademark of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.



Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.



DivX °, DivX Certified °, DivX Plus ° HD and associated logos are trademarks of Rovi Corporation or its subsidiaries and are used under license.

ABOUT DIVX VIDEO: DivX * is a digital video format created by DivX, LLC, a subsidiary of Rovi Corporation. This is an official DivX Certified * device that plays DivX video. Visit divx.com for more information and software tools to convert your files into DivX videos.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified * device must be registered in order to play purchased DivX Video-on-Demand (VOD) movies. To obtain your registration code, locate the DivX VOD section in your device setup menu. Go to vod. divx.com for more information on how to complete your registration.

HDMI

HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI licensing LLC in the United States and other countries.



The Wi-Fi CERTIFIED Logo is a certification mark of the Wi-Fi Alliance.



DLNA °, the DLNA Logo and DLNA CERTIFIED ° are trademarks, service marks, or certification marks of the Digital Living Network Alliance.

3 Important

Read and understand all instructions before you use your SoundBar. If damage is caused by failure to follow instructions, the warranty does not apply.

Safety

Risk of electric shock or fire!

- Never expose the product and accessories to rain or water. Never place liquid containers, such as vases, near the product. If liquids are spilt on or into the product, disconnect it from the power outlet immediately. Contact Philips Consumer Care to have the product checked before use.
- Never place the product and accessories near naked flames or other heat sources, including direct sunlight.
- Never insert objects into the ventilation slots or other openings on the product.
- Where the mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
- Disconnect the product from the power outlet before lightning storms.
- When you disconnect the power cord, always pull the plug, never the cable.

Risk of short circuit or fire!

 Before you connect the product to the power outlet, ensure that the power voltage matches the value printed on the back or bottom of the product. Never connect the product to the power outlet if the voltage is different.

Risk of injury or damage to the SoundBar!

- For wall-mountable products, use only the supplied wall mount bracket. Secure the wall mount to a wall that can support the combined weight of the product and the wall mount. Koninklijke Philips Electronics N.V. bears no responsibility for improper wall mounting that results in accident, injury or damage.
- Never place the product or any objects on power cords or on other electrical equipment.
- If the product is transported in temperatures below 5°C, unpack the product and wait until its temperature matches room temperature before connecting it to the power outlet.
- Parts of this product can be made of glass.
 Handle with care to avoid injury and damage.

Risk of overheating!

 Never install this product in a confined space. Always leave a space of at least four inches around the product for ventilation. Ensure curtains or other objects never cover the ventilation slots on the product.

Risk of contamination!

- Do not mix batteries (old and new or carbon and alkaine, etc.).
- Danger of explosion if batteries are incorrectly replaced. Replace only with the same or equivalent type.
- Remove batteries if they are exhausted or if the remote control is not to be used for a long time.
- Batteries contain chemical substances, they should be disposed of properly.

Risk of swallowing batteries!

- The product/remote control may contain a coin/button type battery, which can be swallowed. Keep the battery out of reach of children at all times! If swallowed, the battery can cause serious injury or death. Severe internal burns can occur within two hours of ingestion.
- If you suspect that a battery has been swallowed or placed inside any part of the body, seek immediate medical attention.
- When you change the batteries, always keep all new and used batteries out of reach of children. Ensure that the battery compartment is completely secure after you replace the battery.
- If the battery compartment cannot be completely secured, discontinue use of the product. Keep out of reach of children and contact the manufacturer.

Care for your product

Use only microfiber cloth to clean the product.

Care of the environment



Your product is designed and manufactured with high quality materials and components, which can be recycled and reused.



When this crossed-out wheeled bin symbol is attached to a product it means that the product is covered by the European Directive 2002/96/ EC. Please inform yourself about the local separate collection system for electrical and electronic products.

Please act according to your local rules and do not dispose of your old products with your normal household waste.

Correct disposal of your old product helps to prevent potential negative consequences for the environment and human health.




Your product contains batteries covered by the European Directive 2006/66/EC, which cannot be disposed with normal household waste. Please inform yourself about the local rules on separate collection of batteries because correct disposal helps to prevent negative consequences for the environmental and human health.

4 Your SoundBar

Congratulations on your purchase, and welcome to Philips! To fully benefit from the support that Philips offers, register your SoundBar at www. philips.com/welcome.

Main unit




(1) Standby indicator
When the SoundBar is in standby, the standby indicator turns red.

Source indicator/Volume indicator
 Source indicator lights up when a source is selected.

When you change volume, volume indicators light up to indicate the volume level.

- ARC: Lights up when you select HDMI ARC as the input source.
- OPTICAL: Lights up when you select Optical as the input source.
- AUX: Lights up when you select AUX as the input source.
- **COAXIAL**: Lights up when you select COAXIAL as the input source.
- (3) Sound mode indicator/Volume indicator
 Sound mode indicator lights up when a you
 play an audio source with surround sound.
 When you change volume, volume indicators
 light up to indicate the volume level.
 - DTS: Lights up when you play DTS audio.
 - DOLBY D: Lights up when you play Dolby audio.
 - V.SURR: Lights up when you select Virtual Surround sound

Remote control

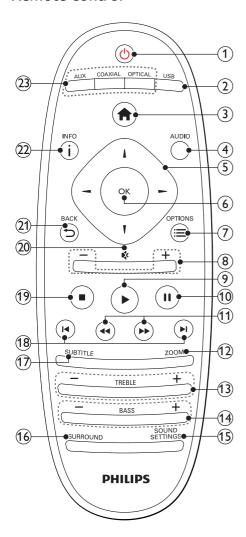

- 1 (Standby-On)
 - Switch the SoundBar on or to standby. When the SoundBar is in standby, the standby indicator turns red.
 - When EasyLink is enabled, press and hold for at least three seconds to switch all connected HDMI CEC compliant devices to standby.

(2) USB

Switch to USB storage device.

(3) **♠** (Home)

Access the home menu.

(4) AUDIO

Select an audio language when you play a video.

- 5 Navigation buttons (◀ / ▶ / ▲ / ▼)
 Navigate menus.
- (6) OK

Confirm an entry or selection.

(7) **≡** OPTIONS

Access more play options while playing a multimedia file from a USB storage device or PC (through DLNA).

8 +/- (Volume)

Increase or decrease volume.

- (Play) Start or resume play.
- (10) III (Pause)
 Pause play.
- (11) <- (Fast Backward/ Fast Forward)
 Search backwards or forward.
- (12) ZOOM

Zoom into a video scene or picture.

(13) TREBLE +/-

Increase or decrease treble.

(14) BASS +/-

Increase or decrease bass.

(15) SOUND SETTINGS

Toggle through sound modes.

(16) SURROUND

Toggle between stereo and virtual surround sound.

(17) SUBTITLE

Select subtitle language for video.

(18) I ✓ / ►I (Previous/Next)

Skip to the previous or next track, chapter or file.

(Stop) **■** (Stop)

Stop play.

(20) **♦** (Mute)

Mute or restore volume.

Return to a previous menu screen.

22) i INFO

Display information about the current picture, audio, or video.

(23) AUDIO SOURCE

- AUX: Switch your audio source to the AUX connection.
- COAXIAL:Switch your audio source to the coaxial connection.
- OPTICAL: Switch your audio source to the optical connection. Press twice to switch to HDMI ARC source when your SoundBar is connected to the TV through an HDMI ARC connection.

EasyLink controls

With Easylink, you can control your SoundBar, TV and the connected devices with the standby button on your SoundBar remote control.

 Ø (Standby-On): Press and hold to switch your SoundBar,TV, and the connected devices to standby.

5 Connect your SoundBar

This section helps you connect your SoundBar to a TV and other devices. For a comprehensive interactive guide, see www.connectivityguide. philips.com.



Note

- For identification and supply ratings, refer to the type plate at the back or bottom of the product.
- Before you make or change any connections, make sure that all devices are disconnected from the power outlet.


Subwoofer

Follow the steps below to position and connect your subwoofer:

Position

Place the subwoofer at least one meter (three feet) away from your SoundBar, and ten centimeters away from the wall.

For best results, place your subwoofer as shown below.






 The SoundBar and the subwoofer automatically pair up when you switch on the SoundBar and the subwoofer.

Connectors

Connect other devices to your SoundBar.


Side left.



USB

Audio, video or picture input from a USB storage device.

Back connectors



AC MAINS~
 Connect to the power supply.

- 2 (Standby-On)
 - Switch the SoundBar on or to standby.
 - When the SoundBar is in standby, the standby indicator turns red.
- 3 DIGITAL IN OPTICAL Connect to an optical audio output on the TV or a digital device.
- (4) DIGITAL IN COAXIAL Connect to a coaxial audio output on the TV or a digital device.

(5) AUDIO IN - AUX

Connect to an analog audio output on the TV or an analog device.

- 6 HDMI OUT (ARC)
 Connect to the HDMI input on the TV.
- 7 LAN

Connect to the LAN input on a broadband modem or router.

Connect to TV

Connect your SoundBar to a TV to watch videos. You can listen to audio from TV programs through your SoundBar. Use the best quality connection available on your SoundBar and TV.

Option 1: Connect to TV through HDMI (ARC)


Your SoundBar supports HDMI version 1.4 - Audio Return Channel (ARC). If your TV is HDMI ARC compliant, connect your SoundBar to the TV through the HDMI ARC connection.

With HDMI ARC, you do not need an additional audio cable to play audio from TV through your SoundBar.

(Cable not supplied)

1 Using a High Speed HDMI cable, connect the HDMI OUT (ARC) connector on your SoundBar to the HDMI ARC connector on the TV

The HDMI ARC connector on the TV might be labeled HDMI IN or HDMI. For details on TV connectors, see the TV user manual.



- On your TV, turn on HDMI-CEC. For details, see the TV user manual.
- If audio from TV does not play automatically, set up the audio manually (see 'Set up audio for connected devices' on page 11).


Option 2: Connect to TV through HDMI

Best quality video

If your TV is not HDMI ARC compliant, connect your SoundBar to the TV through a standard HDMI connection

With a standard HDMI connection, you need an additional audio cable to play the audio from the TV through your SoundBar (see 'Connect audio from TV and other devices' on page 10). (Cable not supplied)

Using a High Speed HDMI cable, connect the HDMI OUT (ARC) connector on your SoundBar to the **HDMI** connector on the TV. The HDMI connector on the TV might be labeled **HDMI IN**.



- On your TV, turn on HDMI-CEC. For details, see the TV user manual.
- To play audio from TV programs through your SoundBar, connect an additional audio cable (see 'Connect audio from TV and other devices' on page 10).
- If audio from the TV does not play automatically, set up the audio manually (see 'Set up audio for connected devices' on page 11).

Connect audio from TV and other devices

Play audio from TV or other devices through your SoundBar.

Use the best quality connection available on other devices.



Note

- · The audio connections in this user manual are only recommendations. You can use other connections too.
- When your SoundBar and TV are connected through HDMI ARC, an audio connection is not reauired.


Option 1: Connect audio through a digital optical cable

Best quality audio

Using an optical cable, connect the OPTICAL connector on your SoundBar to the OPTICAL **OUT** connector on the device.

The digital optical connector might be labeled SPDIF, SPDIF OUT, or OPTICAL.

(Cable not supplied)




Option 2: Connect audio through a digital coaxial cable

Good quality audio

Using a coaxial cable, connect the COAXIAL connector on your SoundBar to the COAXIAL/ DIGITAL OUT connector on the device. The digital coaxial connector might be labeled

DIGITAL AUDIO OUT.


(Cable not supplied)



Option 3: Connect audio through analog audio cables

Basic quality audio

Using an analog cable, connect the **AUX** connectors on your SoundBar to the audio connectors on the device. (Cable not supplied)



Set up audio for connected devices

When you connect a device to your SoundBar, check the audio settings.

- On yourTV and other devices, turn on HDMI-CEC. For details, see the user manual of the TV and the other device.
- 2 Select 'Amplifier' from the TV speakers menu to hear sound from the SoundBar. For details, see the TV user manual.
- On your SoundBar, turn on System Audio

If the connected device is not HDMI-CEC compliant, press the correct source button on the remote control to select the audio input.

Computers and the Internet

Connect your SoundBar to your computer network and the internet, and enjoy:

- Multimedia content streamed from your computer: Play music, photo, and video from a computer (see 'Browse PC from SoundBar' on page 18).
- Multimedia content streamed from your mobile device or tablet:Play music, photo, and video from a mobile device or other media server on your network (see 'Browse a media server from mobile device' on page 19).
- Software update: Update the SoundBar software through the network (see 'Update software through the Internet' on page 24).



Caution

 Before you try to connect the SoundBar to a computer network, familiarize yourself with the network router, media server software and networking principles. If necessary, read documentation that accompanies the network components. Philips is not responsible for lost, damaged, or corrupt data.

Wired connection


Connect your SoundBar to your router through a network cable.

What you need

- A network router (with DHCP enabled).
- A network cable (RI45 straight cable).
- Computer and mobile devices with media server software installed.
- For software update, make sure that the network router has access to the Internet, and is not restricted by firewalls or other security systems.

Set up the wired network

Connect your SoundBar to your router as shown below, and then switch on the devices.



- 1 Connect the SoundBar to a network router through a wired connection.
- Turn on your TV, and switch to the correct source for the SoundBar.
- Press **\Pi** (Home).
- Select [Setup], and then press OK.
- Select [Network] > [Ethernet], and then press OK.
- Follow the instructions on the TV to complete the setup.
 - → The SoundBar connects to the internet.
- If connection fails, a failure message is displayed on your TV. Press **OK** to return to the previous menu, and then retry the procedure.

Wireless connection

Connect your SoundBar to your router through a wireless connection.

What you need

- A network router (with DHCP enabled). For best wireless performance, coverage, and compatibility, use 802.11n router.
- Computer and mobile devices with media server software installed.
- For software update, make sure that the network router has access to the Internet and is not restricted by firewalls or other security systems.

Set up the wireless network

Your SoundBar has a built-in Wi-Fi for easy access to the wireless network, Connect your SoundBar to your router as shown below, and then switch on the devices.



- Connect the SoundBar to a network router through a wireless connection.
- Turn on your TV, and switch to the correct source for the SoundBar.
- Press **(Home)**.
- Select [Setup], and then press OK.
- Select [Network] > [Wireless], and then press OK.
- Follow the instructions on the TV to complete the setup.
 - → The SoundBar connects to the internet.
- If connection fails, a failure message is displayed on your TV. Press **OK** to return to the previous menu, and then retry the procedure.

Check network settings

Press **(Home)**.

Select [Setup], and then press OK. Select [Network] > [Network Info], and then press OK.

→ The current network settings are displayed.

Name your SoundBar

To easily identify your SoundBar on a network, name your SoundBar.

- Turn on your TV, and switch to the correct source for the SoundBar.
- Press **\Pi** (Home).
- Select [Setup], and then press OK.
- Select [System] > [Device Name], and then press OK.
 - → A virtual keyboard is displayed on your TV.
- Press Navigation buttons and OK to enter the name.
- Select [OK] on the virtual keyboard to exit.

6 Use your SoundBar

This section helps you use the SoundBar to play media from a wide range of sources.

Before you start

- Make the necessary connections as described in the user manual.
- Complete the first-time setup. First-time setup appears when you turn on the SoundBar for the first time. If you do not complete the setup, you are prompted to complete it each time you turn on the SoundBar
- Switch the TV to the correct source for the SoundBar.

Adjust the volume

Your SoundBar has incremental volume control. When you change volume or mute your SoundBar, one or multiple Volume indicator light up to indicate the volume level.

- To increase or decrease volume, press +/-(Volume).
- To mute sound, press MUTE.
- To restore the sound, press MUTE again or press +/- (Volume).

Choose your sound

This section helps you choose the ideal sound for your video or music.

Sound mode

Select predefined sound modes to suit your video or music.

- 1 Press **SOUND SETTINGS** repeatedly to select a sound setting:
 - [Auto]: Automatically select [Movie] or [Music] based on the sound stream.
 - [Movie]: Enjoy a cinematic audio experience, specially enhanced for movies.
 - [Music]: Recreate the original recording environment of your music, in the studio or at a concert.
 - [Original]: Experience the original sound of your movies and music, without added sound effects.
 - [News]: Hear every word with optimized speech and clear vocals.
 - [Gaming]: Enjoy thrilling arcade sounds, ideal for action-packed video games or loud parties.
- 2 Press **OK** to confirm.

Auto volume

Turn the auto volume on to keep the volume constant when you switch to a different source.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

Press the Navigation buttons (up/down) to select [Audio] > [Auto Volume] > [On].

4 Press **OK** to confirm.

Surround sound mode

Experience an immersive audio experience with surround sound modes.

- Press **SURROUND** repeatedly to select a surround mode.
 - [Virtual Surround]: Creates a highly compelling 5.1 channel listening experience. The sound mode indicator on the main unit lights up.
 - [Stereo]:Two-channel stereo sound. Ideal for listening to music.

Equalizer

Change the high frequency (treble) and low frequency (bass) settings of the SoundBar. Press TREBLE +/- or BASS +/- to change the frequency.

The DTS indicator blinks when you press TREBLE +/- or BASS +/-.

Synchronize picture and sound

If the audio and video are not synchronized, delay the audio to match the video.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

Press the Navigation buttons (up/down) to select [Audio] > [Lip Sync], and then press OK.

- 4 Select one of the following options, and then press **OK**:
 - [Auto]: For an HDMI connection, automatically adjust the audio delay.
 - [Manual]: Press the Navigation buttons (up/down) to manually adjust the audio delay.
 - **[Off]**: Disable automatic adjustment of audio.
- **5** Press **OK** to confirm.

USB storage devices

Enjoy pictures, audio and video on a USB storage device.

What you need

- A USB storage device that is formatted for FAT or NTFS file systems, and complies with the Mass Storage Class.
- A USB extension cable, if the USB storage device does not fit into the connector.



Note

- You can use digital cameras connected by USB if they can play the files without using a special computer program.
- To play DivX DRM protected files from a USB storage device, connect your SoundBar to a TV through an HDMI cable.

Play files

- Connect the USB storage device to the SoundBar.
- 2 Press USB.
 - → The content browser is displayed.
- 3 Select a file, and then press OK.
- 4 Press the playback buttons to control play (see 'Play buttons' on page 15).

Play buttons

Button	Action
Navigation buttons	Navigate menus.
ОК	Confirm an entry or selection.
► (Play)	Start or resume play.
П	Pause play.
	Stop play.
 	Skip to the previous or next track, chapter or file.
44/ >>	Search backwards or forward.
Navigation buttons (up/down)	Rotate the picture counter- clockwise or clockwise.
SUBTITLE	Select subtitle language for video.
≡ OPTIONS	Access more play options while playing a multimedia file.

For video formats such as DivX and WMV:

- To stop play, press
- To resume the video from where you stopped, press ► (Play).
- To play the video from the start, press **OK**.

DivX

Play DivX videos from a USB storage device.



Note

 To play DivX DRM protected files from a USB storage device, connect your SoundBar to a TV through an HDMI cable.

VOD code for DivX

Before you purchase DivX videos and play them, register the SoundBar on www.divx.com using the DivX VOD code.

- 1 Press ♠ (Home).
 - Select [Setup], and then press OK.
- 3 Select [Miscellaneous] > [DivX(R) VOD Code], and then press OK.
 - → The DivX VOD registration code for your SoundBar is displayed.

Subtitles

If your video has subtitles in multiple languages, select a subtitle language.

1 While playing video, press **SUBTITLE** to select a language.



Note

- Make sure that the subtitle file has the same name as the video file. For example, if the video file is named 'movie.avi', save the subtitle file as 'movie.srt' or 'movie.sub'.
- You can play subtitle files in the following formats: .srt, .sub, .txt, .ssa, .ass, smi, and .sami.
 These files do not appear in the file navigation menu.

Audio, video, and picture options

Use advanced features when you play audio, video, or media files from a USB storage device or network media server (through SimplyShare).

Audio options

While playing audio, repeat an audio track or a folder.

- 1 Press : OPTIONS repeatedly to cycle through the following functions:
 - [Repeat One]: Repeat the current track or file.
 - [Repeat All]: Repeat a selected folder.
 - [Shuffle Loop]: Play audio tracks in random order.
 - [Repeat Off]: Turn off the repeat mode.

Video options

While watching video, select options such as subtitles, audio language, and video settings. Depending on the video source, some options are not available.

- 1 Press ≡ OPTIONS.
 - → The video options menu is displayed.
- Press the Navigation buttons and OK to select and change:
 - [Audio]: Select audio language for video.
 - [Subtitle]: Select subtitle language for video.
 - **[GoTo]**: Skip to a specific part of the video by entering the time of the scene.
 - [Repeat Title]: Repeat a title.
 - [Repeat All]: Repeat all the tracks.
 - [Repeat Off]: Turn off the repeat mode.
 - [Video Setting]: Adjust the video output.

Picture options

While viewing a picture, add animation to a slideshow or change the picture settings.

- 1 Press ≡ OPTIONS.
 - → The picture options menu appears.
- Press the Navigation buttons and OK to select and change the following settings:
 - [Video Setting]: Adjust the video output.
 - [Background Music]: Select the music track.
 - [Slide Timing]: Select the display speed for each picture in a slide show.
 - **[Slide Transition]**: Select the transition type for slideshow.
 - [Shuffle Loop]:Play pictures in random order.
 - [Repeat All]: Repeat a selected folder.
 - [Repeat Off]: Turn off the repeat mode.

Slideshows

While playing audio, access fun features such as picture and musical slideshows.

Picture slideshows

View a slideshow of your pictures stored in your USB storage device or network media server.

- 1 Select a picture from the USB storage device or network media server, and then press ► (Play).
- 2 Press ≡ OPTIONS.
- Press Navigation buttons and OK to select the following settings:
 - [Slide Transition]: Select the transition type for slideshow.
 - [Slide Timing]: Select the display speed for each picture in a slide show.
- 4 Press to stop the slideshow.

Musical slideshows

Create a musical slideshow to play music and pictures at the same time.

- 1 Select a music track, and then press **OK**.
- 2 Press SACK, and go to the picture folder.
- 3 Select a picture, and then press ► (Play) to start the slideshow.
- **4** Press to stop slideshow and music.

Use smartphone

Turn your iPhone or Android smartphone into a virtual remote control, or use it to browse the contents of a USB storage device on your SoundBar.

What you need

- An iPhone (iOS 3.1.3 and above) or Android (Android 2.1 and above) smartphone.
- A wired or wireless home network.

Before you start

- Connect your SoundBar to your home network (see 'Computers and the Internet' on page 11).
- Name your SoundBar (see 'Name your SoundBar' on page 13).
- Connect your smartphone to the same home network. For details, see your smartphone user manual.

Download MyRemote application

Download the Philips application, **MyRemote** (MyRemote) to your smartphone. This application is free.



Note

- Philips MyRemote is only available for iPhones and Android smartphones.
- 1 Tap the App Store (App Store) icon on the iPhone or the Market (Market) icon on the Android smartphone.
- **2** Search for 'Philips **MyRemote**' application.
- Follow the instructions on your smartphone to download the application.
 - → The MyRemote (MyRemote) icon is added to the home screen of your smartphone.

Access MyRemote application

Access the **MyRemote** application from your smartphone, and then identify your SoundBar on the home network.

- 1 Tap MyRemote (MyRemote) on your smartphone.
 - Your SoundBar and the other devices on the network are displayed on your smartphone. A browsing bar with Devices, Remote, and Source tabs is also displayed.
- 2 If your SoundBar is not found, check the network connection.
 - Then, tap the **Devices** (Devices) tab on your smartphone to search again.
- 3 Tap the SoundBar icon on the smartphone.
 - → The virtual remote control is displayed on the smartphone.
- 4 To exit the application, press the home button on your smartphone.

Use your smartphone as a remote control

The virtual remote control is displayed in multiple screens on the smartphone. To access the buttons, swipe the smartphone screen to the left or right. Only the control buttons that are relevant to the play mode are enabled on your smartphone. For example, if you play pictures, only the remote control buttons that are used to control the pictures are enabled. However, if you play a video, additional buttons, such as **SUBTITLE** are enabled on your smartphone.

- 1 Launch the application on your smartphone.
 - → Depending on the play mode, the relevant remote control buttons are enabled
- 2 If the remote control buttons do not appear, tap the **Remote** (Remote) tab on your smartphone.
- 3 Swipe to the left or right screen to access more buttons.



Note

 Some control functions are not available on smartphones.

Browse a USB storage device

Browse a USB storage device from your smartphone, and play an audio, video, or multimedia file.

- 1 Launch the remote control application on your smartphone.
- 2 Connect a USB storage device to your SoundBar.
- On your smartphone, tap the Source (Source) tab, and then select USB (USB).
 - The folders in your USB storage device are displayed.
- 4 Select a folder to browse, and then select a file to play.
 - → The relevant remote control buttons are enabled on your smartphone.
- 5 To access the remote control while you browse the contents, tap the **Remote** (Remote) tab on your smartphone.

Share media through SimplyShare

When you connect your SoundBar to your home network, you can enjoy music, photo, and video stored on a computer or other media server on the network through SimplyShare.

With SimplyShare, you can:

- select and play media stored on a computer through your SoundBar;
- select media stored on a mobile device and play it on your SoundBar, and
- use your mobile device as a controller to select content from a media server, and play it on your SoundBar.

The media server can be set up on any DLNA-compatible device such as a computer, smartphone, or tablet.



Note

 You cannot share copyright protected content through SimplyShare.

What you need

- A wired or wireless home network, connected to a Universal Plug and Play (uPnP) router. For best wireless performance, coverage, and compatibility, use 802.11n router.
- A LAN cable to connect your SoundBar to your home network.
- A media server software such as:
 - PC running Windows Media Player 11 or higher, or
 - Mac running Twonky Media Server, or
 - Mobile devices with media sharing applications.



Note

 There are numerous media servers in the market for computers and mobile devices. These media servers support variety of devices, media types, and operating systems. Select a media server based on the device, operating system, and your needs.

Before you start

- Connect your SoundBar to your home network. For best performance, connect the SoundBar through a wired network (see 'Computers and the Internet' on page 11).
- Connect your computer and other DLNAcompatible mobile devices to the same home network. For details, see the user manual of the device.
- Make sure that the PC firewall allows you to run the media server software.
- Make sure that the devices supports DLNA or media sharing (iOS) features.
- Switch on the devices and the router.

Browse PC from SoundBar

From the SoundBar home menu, access the media files on your computer and share them through SimplyShare.

To enable media sharing, set up the media server software on your computer:

Set up media server software

Some examples of media servers are as follows. To use other media servers, see the web site of the media server:

Microsoft Windows Media Player 11

- 1 Start Windows Media Player on your PC.
- 2 Click the Library tab, and then select Media Sharing.
- The first time you select Media Sharing on your PC,a pop-up screen appears. Check the Share my media box and click OK.
 - → The **Media Sharing** screen is displayed.
- 4 In the Media Sharing screen, make sure that you see a device marked as Unknown Device.
 - If you don't see an unknown device after a minute or so, check that your PC firewall is not blocking the connection.
- 5 Select the unknown device and click Allow.
 - → A green tick appears next to the device.
- By default, Windows Media Player shares from these folders: My Music, My Pictures, and My Videos. If your files are in other folders, select Library > Add to Library.
 - → The Add to Library screen is displayed.
 - If necessary, select **Advanced options** to display a list of monitored folders.
- 7 Select My folders and those of others I can access, and then click Add.
- **8** Follow the onscreen instructions to add the other folders that contain your media files.

Microsoft Windows Media Player 12

- 1 Start Windows Media Player on your PC.
- In Windows Media Player, click the Stream tab, and then select Turn on media streaming.
 - → The Media streaming options screen is displayed.
- 3 Click Turn on media streaming.
 - → You return to Windows Media Player screen.
- 4 Click the Stream tab and select More streaming options.
 - → The Media streaming options screen is displayed.
- Make sure that you see a media program in the Local network screen.
 - If you don't see a media program, check that your PC firewall is not blocking the connection.
- 6 Select the media program and click Allowed.
 - → A green arrow appears next to the media program.
- By default, Windows Media Player shares from these folders: My Music, My Pictures, and My Videos. If your files are in other folders, click the Organize tab and select Manage libraries > Music.
 - → The Music Library Locations screen is displayed.
- 8 Follow the onscreen instructions to add the other folders that contain your media files.

 Macintosh OS X Twonky Media (v4.4.2)
- 1 Visit www.twonkymedia.com to purchase the software, or download a free 30-day trial to your Macintosh.
- 2 Start Twonky Media on the Macintosh.
- In the Twonky Media Server screen, select Basic Setup and First Steps.
 - → The First steps screen is displayed.
- 4 Type a name for your media server, and then click Save changes.
- Back in the Twonky Media screen, select Basic Setup and Sharing.
 - → The **Sharing** screen is displayed.
- 6 Browse and select folders to share, and then select Save Changes.
 - Your Macintosh rescans the folders automatically so that they are ready to share.

Play files from your PC



Note

- Before you play multimedia content from the computer, make sure that the SoundBar is connected to the home network, and the media server software is properly set up.
- 1 Switch your TV to the correct HDMI source for your SoundBar.
- Press ♠ (Home).
 - → The home menu is displayed.
- 3 Select [Network], and then press OK.
- 4 Select [Shared Folder] to browse a PC or [Shared Media Files] to browse a media server.
- 5 Select a file, and then press OK.
- 6 Press the playback buttons to control play (see 'Play buttons' on page 15).

Browse a media server from mobile device

From your mobile device such as a smartphone or tablet, access media files on any media server on the network and share them through SimplyShare.



Note

 Not all devices are capable of sharing media through SimplyShare. For information about your mobile device, see the user manual of your mobile device.

Download a media sharing application on your mobile device.

- For Android based smartphones and tablets, search for DLNA media server app in Android Market (Android).
- For iPhones, iPods and iPads, search for media server app in App Store (Apple).

Follow the onscreen instructions to set up the media server software on your mobile device. Make sure that you select the correct settings to use the mobile device as a media server and controller. For details, check the user manual of the mobile application.

Control and play files stored on any device



Note

- The exact steps differ from one device to another. For information about your mobile device, contact the support center of your device.
- 1 Make sure that the media server application is set up on your mobile device.
- 2 Launch the media sharing application on the mobile device.
 - Your SoundBar, mobile device, and other devices on the home network are automatically detected and displayed on the screen.
- 3 Select the device that stores your media files. For example, if you want to play a file from your mobile device, select the mobile device. If you want to play a file from your computer, select your computer.
 - The folders in the selected device are displayed. Depending on the media server, the folder names may vary.
 - → If you cannot see the folders, make sure that you enable media sharing on the selected device so that the content is available for sharing.
- 4 Select a media file to play.
- From the menu of your mobile device, select SoundBar to stream the media to your SoundBar:
- Tap the play buttons on your mobile device to control the play.
 - → The media file is shared on the home network,
 - Some media files may not display or play due to compatibility issues.

EasyLink

The SoundBar supports Philips EasyLink, which uses the HDMI-CEC (Consumer Electronics Control) protocol. EasyLink-compliant devices that are connected through HDMI can be controlled by a single remote control.

Philips does not guarantee 100% interoperability with all HDMI-CEC devices.

What you need

- HDMI-CEC compliant devices.
- An HDMI connection between the connected devices.

Switch on

- On the TV and other connected devices, turn on the HDMI-CEC operations. For details, see the manual of the TV or other devices.
- 2 Press ♠ (Home).
- 3 Select [Setup], and then press OK.
- 4 Select [EasyLink] > [EasyLink], and then press OK.
- 5 Select [On], and then press OK.

Control devices

Control the SoundBar and the other connected HDMI-CEC compliant devices with a single remote control.

One-touch play

If you enable One-touch play, the TV automatically switches to the correct channel when you play a video in your SoundBar.

One-touch standby

When you press and hold \circlearrowleft (Standby) on the remote control, the SoundBar and all the connected HDMI-CEC devices (that support one-touch standby) switch to the standby mode. If one-touch standby is enabled on your SoundBar, you can switch to standby with the remote control of the TV or other HDMI-CEC devices.

Auto Power On From TV

If auto power from TV is enabled on your SoundBar, you can turn on your SoundBar when you press and hold the \circlearrowleft (Standby) on the TV remote control.

System Audio Control

When you play a device that has its audio output routed to the SoundBar, turn on System Audio control and select audio source through your connected device.

To use one-touch audio, turn on System Audio Control and select audio source through your connected device.

Play audio from SoundBar

Play the audio from a connected device through your SoundBar.

- 1 Press **\Pi** (Home).
- 2 Select [Setup], and then press OK.
- Select [EasyLink] > [System Audio Control] > [On], and then press OK.
- Press AUDIO SOURCE button on your remote control to select the audio output for the connected device.
 - AUX: Switch your audio source to the AUX connection.
 - **COAXIAL**: Switch your audio source to the coaxial connection.
 - OPTICAL: Switch your audio source to the optical connection. Press twice to switch to HDMI ARC source when your SoundBar is connected to the TV through an HDMI ARC connection.
- **5** Press **OK** to confirm.



- To play TV audio from your SoundBar through HDMI ARC connection, select the correct video input on the TV and turn off the TV speakers (see 'Connect to TV' on page 9).
- For details, see the TV user manual.

7 Change settings

This section helps you to change the settings of your SoundBar.



Caution

 Most of the settings are already configured with the best value for your SoundBar. Unless you have a reason to change a setting, it is best to leave it at the default value.

Picture

Change the picture settings to suit your preferences.



Note

 The best setting is automatically selected for the TV. If you change the setting, make sure that the TV supports the new settings.

Picture settings and format

- 1 Press ♠ (Home).
- 2 Select [Setup], and then press OK.
- 3 Select [Video] > [Aspect Ratio], and then press OK.
- 4 Select one of the following settings, and then press **OK**:
 - [16:9]: Display picture in 16:9 aspect ratio if the source is 16:9.
 - [Pan Scan 4:3]:Adjust the 16:9 source to display picture in 4:3 aspect ratio.
 - [Letter Box 4:3]: Adjust the 16:9 source to display picture in 4:3 aspect ratio with black borders on top and bottom.
 - [16:10]: Display picture in 16:10 aspect ratio if the source is 16:10.

Picture color

Deep Color recreates the natural world on your TV screen and displays vivid images in over a billion of colors.

If your TV supports Deep Color and is connected to your SoundBar through an HDMI cable, you can change the Deep Color:

1 Press ♠ (Home).

Select [Setup], and then press OK.

3 Select [Video] > [Deep Color], and then press OK.

4 Select one of the following options, and then press **OK**:

- [Auto]: Automatically select HDMI Deep Color.
- [10 bit]: Display 10-bit color.
- [12 bit]: Display 12 bit color.
- [Off]: Display standard 24-bit color.

Picture resolution

Set the picture resolution for your video.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

Select [Video] > [TV System], and then press OK.

Select a picture resolution, and then press OK.

Video zoom

Zoom into a picture or video.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

3 Select [Video] > [Video Zoom] > [On], and then press OK.

1080P 24 Hz output

Enable 1080p 24 Hz HDMI output on yourTV.

1 Press ♠ (Home).

Select [Setup], and then press OK.

Select [Video] > [1080P 24Hz] > [On], and then press OK.

Video setting

Adjust the video output.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

Select [Video] > [Video Setting], and then press OK.

4 Adjust the settings.

5 Press OK to confirm.

Sound

Change the sound settings to suit your preference.

HDMI audio

To hear an HDMI audio output from your TV, connect your SoundBar to the TV through an HDMI cable.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

3 Select [Audio] > [HDMI Output], and then press OK.

4 Select the following options, and then press OK:

- **[PCM]**: Switch audio output to stereo.
- [RAW]: Output original DTS or Dolby audio

Night mode

For quiet listening, decrease the volume of loud sounds when you play audio. Night mode is only available for Dolby-encoded audio.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

Select [Audio] > [Night Mode] > [On], and then press OK.

Language

Select a language for the home menu and subtitles.

Home menu

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

Select [System] > [Menu Language], and then press OK.

4 Select a menu language, and then press OK.

Video subtitle

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

3 Select [System] > [Subtitle], and then press OK.

4 Select a subtitle language for your video, and then press **OK**.

Scan your USB storage device

Scan the USB storage device connected to your SoundBar to browse the media files.

Automatic scan

Automatically scan the USB storage device connected to your SoundBar.

1 Press **(Home)**.

Select [Setup], and then press OK.

Select [System] > [Auto Scan] > [Auto scan on], and then press OK.

Rescan

Rescan the USB storage device connected to your SoundBar or stop scanning.

1 Press ★ (Home).

2 Select [Setup], and then press OK.

3 Select [System] > [Scan Storage] > [Rescan Storage]/ [Stop Scanning Storage], and then press OK.

DLNA DMR control

Restrict access to DLNA DMR content.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

Select [System] > [DLNA DMR] > [On], and then press OK.

Energy saving

Save energy by changing the following settings.

Auto standby

When playing a file from a USB storage device or network media server, automatically switch your Soundbar to standby if:

- it is in pause or stop mode, and
- no button is pressed for 15 minutes.

1 Press ♠ (Home).

Select [Setup], and then press OK.

3 Select [System] > [Auto Standby] > [On], and then press OK.

Sleep timer

Set timers to switch the SoundBar to standby after a specified time.

1 Press ♠ (Home).

2 Select [Setup], and then press OK.

3 Select [System] > [Sleep Timer], and then press OK.

4 Select the duration of the sleep timer.

→ The sleep timer can be set up to 60 minutes. If the sleep timer is set to [Off], it switches off.

5 Press OK to activate.

→ The SoundBar switches to standby after the specified time.

Screen saver

Automatically switch your SoundBar to screen saver mode if:

- it is in pause or stop mode, and
- no button is pressed for the specified time.
- 1 Press ♠ (Home).
- 2 Select [Setup], and then press OK.
 - Select [System] > [Screen Saver], and then press OK.
- 4 Specify the time period by selecting one of the following options, and then press **OK**.
 - [Off]: Disable the screen saver.
 - [2 Minutes]: Switch to screen saver mode after two minutes.
 - **[5 Minutes]**: Switch to screen saver mode after five minutes.
 - [10 Minutes]: Switch to screen saver mode after ten minutes.

Resume play

Resume play from where you stopped.

- 1 Press ♠ (Home).
- 2 Select [Setup], and then press OK.
- Select [System] > [Resume Play] > [On], and then press OK.

Apply factory settings

Reset your SoundBar to the default settings.

- 1 Press **(Home)**.
- 2 Select [Setup], and then press OK.
- 3 Select [System] > [Factory Default], and then press OK.
- 4 Select [Yes], and then press OK.

8 Update software

To continue to get the best features and support for your SoundBar, update the software regularly. Compare the version of your current software with the latest version on www.philips.com/support.

Check software version

- 1 Press ♠ (Home).
- 2 Select [Setup], and then press OK.
- Select [Miscellaneous] > [Version Info], and then press OK.
 - → The software version is displayed.

Update software through the Internet

- 1 Connect your SoundBar to the network. Use a
 - wired network connection (see 'Wired connection' on page 12), or
 - a wireless network connection (see 'Wireless connection' on page 12).
- Press ♠ (Home).
- 3 Select [Setup], and then press OK.
 - Select [Miscellaneous] > [Online Upgrade].
 - → If an upgrade media is detected, you are prompted to start or cancel the update.
- 5 Follow the instruction on the TV to confirm the update.
 - When the software update is complete, the SoundBar automatically switches off and restarts. If it does not, disconnect the power cord for a few seconds and then reconnect it.



Note

 If the SoundBar cannot connect to the Philips server, press (Home), and then select [Setup]
 [Network] > [Ethernet]/ [Wireless] to set up the network.

Update software through USB

What you need

- A USB flash drive, with at least 75MB of memory. The USB flash drive must be FAT or NTFS formatted. Do not use a USB hard drive.
- A computer with Internet access.
- An archive utility that supports the ZIP file format (for example, WinZip® for Microsoft® Windows® or Stufflt® for Macintosh®).

Step 1: Download the latest software

- 1 Connect a USB flash drive to your computer.
- 2 In your web browser, go to www.philips.com/ support.
- 3 At the Philips Support website, find your product and locate the Software and drivers.
 - The software update is available as a zip file.
- 4 Save the zip file in the root directory of your USB flash drive.
- Use the archive utility to extract the software update file in the root directory of the USB flash drive.
 - → The files are extracted under the root directory of your USB flash drive.
- 6 Disconnect the USB flash drive from your computer.

Step 2: Update the software

Connect the USB flash drive to your SoundBar.
 Switch your TV to the correct source for your SoundBar.

3 Press (Home), and then select [Setup].4 Select [Miscellaneous] > [USB Upgrade].

- 5 Follow the instructions on the TV to confirm the update.
 - When the software update is complete, the SoundBar automatically switches off and restarts. If it does not, disconnect the power cord for a few seconds, and then reconnect it.



• When the software update is in progress, do not turn off the power or remove the USB flash drive.

9 Product specifications



Note

 Specifications and design are subject to change without notice.

Media formats

 Picture files, MP3 media, WMA media, DivX Plus HD media, USB storage device

File formats

- Audio: .aac, .mka, .mp3, .wma, .wav, .mp4, .m4a
- Video
 - avi, .divx, .mp4, .mkv, .asf, .wmv, .mpg, .mpeg, .mov, .m4v
 - .rmvb, .rm (Available only in Asia Pacific and China)
- Picture: .bmp, .jpg, .jpeg, .gif, .png

Audio formats

Your SoundBar supports the following audio files.

Extension	Container	Audio codec	Bit rate
.mp3	MP3	MP3	32 kbps ~ 320 kbps
.wma	ASF	WMA	64 kbps ~ 160 kbps
.aac	AAC	AAC, HE- AAC	192 kbps
.wav	WAV	PCM	1.4 Mbps
.m 4 a	MKV	AAC	192 kbps
.mka	MKA	PCM	27.648 Mbps
.mka	MKA	Dolby Digital	640 kbps
.mka	MKA	DTS core	1.54 Mbps
.mka	MKA	MPEG	912 kbps
.mka	MKA	MP3	32 kbps ~ 320 kbps

Extension	Container	Audio codec	Bit rate
.mka	MKA	WMA	64 kbps ~ 160 kbps
.mka	MKA	AAC, HE-AAC	192 kbps

Video formats

If you have a high definition TV, your SoundBar allows you to play your video files with:

- Resolution: 1920 x 1080 pixels at
- Frame rate: $6 \sim 30$ frames per second.

.avi files in AVI container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MP3, WMA	DivX 3.11, DivX 4.x, DivX 5.x, DivX 6.x	10 Mbps max
	MPEG 1, MPEG 2	20 Mbps (peak 40 Mbps)
	MPEG 4 ASP	10 Mbps max
	H.264/AVC HP@4.1/4.0; MP@3.2/3.1/3.0	20 Mbps (peak 40 Mbps)
	WMV9	20 Mbps
.divx files	s in AVI container	
Audio codec	Video codec	Bit rate
PCM, Dolby Digital, MP3, WMA	DivX 3.11, DivX 4.x, DivX 5.x, DivX 6.x	10 Mbps max
	MPEG 1, MPEG 2	20 Mbps (peak 40 Mbps)
	MPEG 4 ASP	10 Mbps max

.mp4 or .m4v files in MP4 container

Audio codec	Video codec	Bit rate
Dolby Digital, MPEG, MP3, AAC, HE-AAC	MPEG 1, MPEG 2	20 Mbps (peak 40 Mbps)
	MPEG 4 ASP	10 Mbps max
	H.264/AVC HP@4.1/4.0; MP@3.2/3.1/3.0	20 Mbps (peak 40 Mbps)

.mkv files in MKV container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MPEG, MP3, WMA, AAC, HE- AAC	MPEG 1, MPEG 2	20 Mbps (peak 40 Mbps)
	MPEG 4 ASP	10 Mbps max
	H.264/AVC HP@4.1/4.0; MP@3.2/3.1/3.0	20 Mbps (peak 40 Mbps)
	WMV9	20 Mbps

.asf and .wmv files in ASF container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, MP3,WMA	MPEG 4 ASP	10 Mbps max
	H.264/AVC HP@4.1/4.0; MP@3.2/3.1/3.0	20 Mbps (peak 40 Mbps)
	WMV9	20 Mbps

.mpg and .mpeg files in PS container

Audio codec	Video codec	Bit rate
PCM, DTS core, MPEG, MP3	MPEG 1, MPEG 2	20 Mbps (peak 40 Mbps)
	MPEG 1, MPEG 2	20 Mbps (peak 40 Mbps)

.rm and .rmvb files in RM container (Available only in Asia Pacific and China)

Audio codec	Video codec	Bit rate
AAC, COOK	RV30, RV40	20 Mbps (peak 40 Mbps)

Amplifier

- Total output power: 120W RMS (10%THD)
- Frequency response: 20 Hz-20 kHz / ±3 dB
- Signal-to-noise ratio: > 65 dB (CCIR) / (A-weighted)
- Input sensitivity:
 - AUX: 800 mV

Video

 HDMI output: 480i/576i, 480p/576p, 720p, 1080i, 1080p, 1080p24

Audio

- S/PDIF Digital audio input:
 - Coaxial: IEC 60958-3
 - Optical:TOSLINK
- Sampling frequency:
 - MP3: 32 kHz, 44.1 kHz, 48 kHz
 - WMA: 44,1 kHz, 48 kHz
- Constant bit rate:
 - MP3: 32 kbps 320 kbps
 - WMA: 48 kbps 192 kbps

USB

- Compatibility: Hi-Speed USB (2.0)
- Class support: USB Mass Storage Class (MSC)
- File system: FAT16, FAT32, NTFS
- Maximum memory support: < 2 TB

Main unit

- Power supply: 110-240V, 50-60Hz
- Power consumption: 25 W
- Standby power consumption: ≤ 0.5 W
- Speaker impedance: 8 Ohm
- Speaker drivers: 2 x 64mm (2.5") woofer + 2 x 25.4 mm (1") tweeter
- Frequency response: 150 Hz 20 kHz
- Dimensions (WxHxD): 840 x 48 x 110 mm
- Weight: 2,2 kg

Subwoofer

- Output power: 72W RMS (10%THD)
- Power supply: 110-240 V, 50-60 Hz
- Power consumption: 30 W
- Standby power consumption: 0.5 W
- Impedance: 4 ohm
- Speaker drivers: 130 mm (5.25") woofer
- Frequency response: 20 Hz-150 Hz
- Dimensions (WxHxD): 226 x 253 x 280 mm
- Weight: 4 kg

Remote control batteries

2 x AAA-R03-1.5 V

10 Troubleshooting



Warning

 Risk of electric shock. Never remove the casing of the product.

To keep the warranty valid, never try to repair the product yourself.

If you have problems using this product, check the following points before you request service. If you still have a problem, get support at www.philips. com/support.

Picture

No picture.

 Make sure that the TV is switched to the correct source for the SoundBar.

No picture on a TV connected through HDMI.

- Make sure that you use a High Speed HDMI cable to connect the SoundBar and TV.
 Some Standard HDMI cables do not display properly for some images or Deep Color.
- Make sure that the HDMI cable is not faulty. If it is faulty, replace it with a new cable.

Sound

No sound from SoundBar speakers.

- Make sure that the SoundBar is not muted.
- Connect the audio cable from your SoundBar to your TV or other devices, You do not need a separate audio connection when the SoundBar and TV are connected through HDMI ARC connection.
- Set up the audio for the connected device.
- Reset your SoundBar to its factory settings.
 Switch it off, and then switch on again.
- On your SoundBar, press the correct source button to select the correct audio input.

No sound from wireless subwoofer.

- 1 Switch off the SoundBar and then switch it on again.
- **2** Switch the SoundBar to AUX source.
- Press and hold CONNECT on the subwoofer until the indicator on the back of the subwoofer blinks

- 4 Press and hold Navigation button ► (right) for at least three seconds.
 - → When the wireless connection succeeds, the indicator on the subwoofer lights up.
 - → If the wireless pairing fails, repeat steps
 1 to 4 to connect your subwoofer to
 the SoundBar

Distorted sound or echo.

 If you play audio from the TV through the SoundBar, make sure that the TV is muted.

Audio and video are not synchronized.

1) Press ♠ (Home). 2) Select [Setup], and then press OK. 3) Select [Audio] > [Lip Sync], and then press OK. Press the Navigation buttons (♠/♥) to select [Auto] or [Manual] and synchronize audio and video (see 'Synchronize picture and sound' on page 14).

Play

Cannot play a DivX file.

- Make sure that the DivX file is encoded according to the 'SoundBar' with the DivX encoder.
- Make sure that the DivX file is complete.

DivX or RMVB/RM subtitles do not display correctly.

 Make sure that the subtitle file name is the same as the movie file name (see 'Subtitles' on page 15).

Cannot read the contents of a USB storage device.

- Make sure that the format of the USB storage device is compatible with the SoundBar.
- Make sure that the file system on the USB storage device is supported by the SoundBar.

EasyLink does not work.

 Make sure that the SoundBar is connected to a Philips brand EasyLink TV, and the EasyLink option is turned on (see 'Switch on' on page 20).

When you switch on the TV, the SoundBar automatically switches on.

 This behavior is normal when you are using Philips EasyLink (HDMI-CEC). To make the SoundBar work independently, switch off EasyLink.

Network

Wireless network distorted or not found.

- Make sure that the wireless network is not disturbed by microwave ovens, DECT phones, or other neighboring Wi-Fi devices.
- Place the wireless router and the SoundBar within five meters of each other.
- If the wireless network does not work properly, try a wired network installation (see 'Wired connection' on page 12).

DLNA

My video does not stream smoothly.

- Check that the home network has enough bandwidth to play the videos. To save the bandwidth on your wireless network, connect your SoundBar to the router through a network cable.
- Use a Wireless N class router (300 mbps) router for best performance.
- Make sure that the Wi-Fi reception is strong on your device.
- Check that the video format is supported by your home theater, the media server application, and the mobile device.

I do not have enough bandwidth on my home network.

- If you are running multiple applications on your wireless network, stop the applications so that the entire bandwidth is available for content streaming.
- Make sure that you connect your SoundBar to the network using a wired connection. Whenever possible, connect other devices (such as PC) to the network through a wired connection too.
- Check that the network cables are not damaged.
 I cannot see my media files on PC.
- Check that you have installed a media server on your PC, and have enabled file sharing on your PC.
- Make sure that the SoundBar supports the PC media files.
- Check the settings on your mobile device to make sure that media sharing is enabled.

I cannot see my SoundBar when I scan from my mobile device.

- Make sure that the SoundBar is connected to the same network.
- Check the signal strength to make sure that your device can receive the signal.
- Make sure that the media server application that you download on your mobile device is DLNA-compatible.

11 Index

A	
advanced	
restore default settings	24
software update	24
software version	24
amplifier	27
audio	
HDMI audio	22
night mode	22
predefined modes	14
settings	22
source	11
specifications	27
audio formats	25
audio options	15
auto standby	23
В	
bass	14
browse	
USB storage device	14
care	
environment	6
product	
compliance	5 2
computer	_
connect to	11
DLNA	18
media server software	18
computer network	11
connect	
audio (analog cable)	11
audio (coaxial cable - digital)	11
audio (optical cable - digital)	10
audio from TV and other devices	10
home network	11
TV (HDMI ARC)	9
TV (HDMI)	10
connectors	
back connectors	9
side connectors	9
control	
Easylink (HDMI-CEC)	8
main unit	6
USB storage device	15
copyright protection	2

D		M	
disable		main unit	
HDMI-CEC	20	overview	6
DivX		specifications	27
subtitles	15	media formats	25
DLNA	18	media server software	18
		multimedia content	
		from USB storage device	14
E			
EasyLink (HDMI-CEC)			
control buttons	8	N	
enable		network	
auto standby	23	home network	11
HDMI-CEC	20	name a device	13
screen saver	24	settings	13
energy		troubleshooting	29
auto standby	23	update software	24
screen saver	24	wired connection	12
sleep timer	23	wireless connection	12
		night mode	22
F			
factory settings	24	0	
FAQs	2		3
17.03	_	open source software	3
		options	10
		audio	15
Н		overview	20
HDMI		HDMI-CEC	20
audio	22	main unit	6
TV (HDMI ARC)	9	remote control	
HDMI-CEC	20	settings	21
		<u></u>	
1		PC	
I to the second		connect to	11
Internet	11	DLNA	18
connect to	11	media server software	18
update software	24		20
		Philips Easylink	20
		picture	16
1		slideshows	
<u> </u>		troubleshooting	28
language	22	play	4 /
onscreen menu	23	slideshows	16
legal notices	2	troubleshooting	28
		USB .	14
		power options	= =
		auto standby	23
		screen saver	24
		sleep timer	23

preference			
audio	22		
auto standby	23	T	
menu language	23	trademarks	2
screen saver	24	treble	14
sleep timer	23	troubleshooting	
product specifications	25	connection	28
r		network	29
		picture	28
<u> </u>		play	28
R		serial number	2
recycling	6	sound	28
remote control			
batteries	27		
overview	7	U	
		•	
		update software	_
S		check current version	24
safety		from a USB storage device	25
disposal	6	from network	24
use of the product	5	USB	
screen saver	24	format	27
settings		USB storage device	
audio	22	control buttons	15
auto standby	23	play	15
HDMI audio	22	specifications	27
HDMI-CEC	20	update software	25
menu language	23		
power	23		
screen saver	24	· · · · · · · · · · · · · · · · · · ·	
sleep timer	23	V	
video	21	video	
side connectors	9	synchronize picture and sound	14
sleep timer	23	video formats	27
slideshows			
animation	16		
duration	16	\	
musical	16	W	
picture	16	wired network	
software		wired connection	12
check current version	24	wireless network	
update	24	wireless connection	12
sound	2 '		
auto volume	14		
bass	14		
equalizer	14		
predefined sound mode	14		
surround sound	14		
synchronize picture and sound	14		
treble	14		
troubleshooting	28		
specifications	25		
specifications subwoofer	23		
	27		
specifications	27 14		

CERTIFICADO DE GARANTIA NO BRASIL

Este aparelho é garantido pela Philips do Brasil Ltda., por um período superior ao estabelecido por lei. Porém, para que a garantia tenha validade, é imprescindível que, além deste certificado, seja apresentada a nota fiscal de compra do produto.

A Philips do Brasil Ltda assegura ao proprietário consumidor deste aparelho as seguintes garantias, a partir da data de entrega do produto, conforme expresso na nota fiscal de compra, que passa a fazer parte deste certificado:

Garantia para rádios e reprodutores de CD portáteis (sem caixa acústica destacável): 180 dias Garantia para os demais produtos da marca Philips: 365 dias.

Esta garantia perderá sua validade se:

- O defeito apresentado for ocasionado pelo uso indevido ou em desacordo com o seu manual de instruções.
- O produto for alterado, violado ou consertado por pessoa não autorizada pela Philips.
- O produto for ligado a fonte de energia (rede elétrica, pilhas, bateria, etc.) de características diferentes das recomendadas no manual de instruções e/ou no produto.
- O número de série que identifica o produto estiver de alguma forma adulterado ou rasurado.

Estão excluídos desta garantia defeitos decorrentes do descumprimento do manual de instruções do produto, de casos fortuitos ou de força maior, bem como aqueles causados por agentes da natureza e acidentes. Excluem-se igualmente desta garantia defeitos decorrentes do uso dos produtos em serviços não doméstico/residencial regular ou em desacordo com o uso recomendado.

ESTÃO EXCLUÍDAS DA GARANTIA ADICIONAL AS PILHAS OU BATERIAS FORNECIDAS JUNTO COM O CONTROLE REMOTO.

Nos municípios onde não exista assistência técnica autorizada Philips, as despesas de transporte do aparelho e/ou técnico autorizado correm por conta do consumidor requerente do serviço. A garantia não será válida se o produto necessitar de modificações ou adaptações para habilitá-lo a operar em qualquer outro país que não aquele para o qual foi designado, fabricado, aprovado e/ou autorizado, ou ter sofrido qualquer dano decorrente deste tipo de modificação.

Philips do Brasil Ltda.

No Brasil, para informações adicionais sobre o produto, entre em contato com o CIC - Centro de Informações ao Consumidor através dos telefones (11) 2121-0203 (Grande São Paulo) e 0800-701-0203 (demais regiões e estados).

Horário de atendimento: de segunda a sexta-feira, das 8h às 20h e sábados das 8h às 13h. Visite também nossa página de suporte ao consumidor no website www.philips.com.br/suporte, onde também está disponível a lista completa e atualizada das assistências técnicas autorizadas Philips.

Para atendimento fora do Brasil, contate a Philips local ou a: Philips Consumer Service Beukenlaan 2 - 5651 CD Eindhoven The Netherlands

LISTA DE SERVIÇO AUTORIZADO-BRASIL

ACRE					
CRUZEIRO DO SUL	68-33227216	ESPIRÍTO SANTO		IPATINGA	31-38222332
RIO BRANCO	68-32217642	CACHOEIRA DE ITAPEMIRIM	28-35223524	ITABIRA	31-38316218
RIO BRANCO	08-32217042	COLATINA	27-37222288	ITAJUBA	35-36211315
		GUARAPARI	27-33614355	ITAUNA	37-32412468
ALAGOAS		LINHARES	27-33715052	JOAO MONLEVADE	31-38512909
ARAPIRACA	82-35222367	SAO MATEUS	27-37635597	JUIZ DE FORA	32-32151514
MACEIO	82-32417237	VILA VELHA VITORIA	27-32891233 27-32233899	LAVRAS	35-38210550
PALMEIRA DOS INDIOS	82-34213452	VITORIA	27-32233899	MANHUACU	33-33314735
UNIAO DOS PALMARES	82-32811305			MONTE CARMELO	34-38422082
		GOIÁS		MONTES CLAROS	38-32218925
AMAPA		ANAPOLIS	62-33243562	MURIAE	32-37224334
MACAPA	96-32175934	CALDAS NOVAS	64-34532878	PASSOS	35-35214342
WAOA A	30-32113334	CATALAO	64-34412786	PATOS DE MINAS	34-38222588
		FORMOSA	61-36318166	POCOS DE CALDAS	35-37224618
AMAZONAS		GOIANESIA	62-33534967	PONTE NOVA	31-38172486
MANAUS	92-36633366	GOIANIA	62-32510933	POUSO ALEGRE	35-34212120
MANAUS	92-32324252	GOIANIA	62-32292908	SAO JOAO DEL REI	32-33718306
		JATAI	64-36363638	SAO SEBASTIAO DO PARAISO	35-35313094
BAHIA		LUZIANIA	61-36228519	SETE LAGOAS	31-37718570
BARREIRAS	77-36113854	TRINDADE	62-35051505	TEOFILO OTONI	33-35225831
	71-36219447	URUACU	62-33571285	UBA	32-35323626
CAMACARI				UBERABA	34-33332520
CRUZ DAS ALMAS	75-36212839	MARANHÃO		UBERLANDIA	34-32123636
EUNAPOLIS	73-32815181	ACAILANDIA	99-35381889	VARGINHA	35-32216827
FEIRA DE SANTANA	75-32232882	BACABAL	99-36212794	VICOSA	31-38918000
GUANAMBI	77-34512791	CAXIAS	99-35212377		
ILHEUS	73-32315995	CODO	99-36612942	PARÁ	
IRECE	74-36410202	IMPERATRIZ	99-35232906	AI TAMIRA	91-35154349
ITABUNA	73-36137777	PEDREIRAS	99-36423142	ANANINDEUA	91-32354831
JEQUIE	73-35254141	SANTA INES	98-36537553	BELEM	91-32421090
JUAZEIRO	74-36116456	SAO JOSE DE RIBAMAR	98-32241581	BELEM	91-32542424
LAURO DE FREITAS	71-33784021	SAO LUIS	98-33122976	CAPANEMA	91-34621100
PAULO AFONSO	75-32811349			MARABA	94-33215574
RIBEIRA DO POMBAL	75-32761853	MATO GROSSO		PARAGOMINAS	91-30110778
SALVADOR	71-32473659	BARRA DO GARCAS	66-34011394	SANTAREM	93-35235322
SALVADOR	71-32072070	CUIABA	65-33176464	TUCURUI	94-37871140
SALVADOR	71-33356233	LUCAS DO RIO VERDE	65-35491333		
SENHOR DO BONFIM	74-35413143	RONDONOPOLIS	66-34233888	PARAÍBA	
SERRINHA	75-32611794	VARZEA GRANDE	65-36826502	CAMPINA GRANDE	83-33212128
SANTO ANTONIO DE JESUS	75-36314470			GUARABIRA	83-32711159
TEIXEIRA DE FREITAS	73-30111600	MATO GROSSO DO SUL		JOAO PESSOA	83-32469689
VITORIA DA CONQUISTA	77-34221917	CAMPO GRANDE	67-33831540		
		DOURADOS	67-34217117	PARANÁ	
CEARÁ		500.0.500	0. 0.2	ARAPONGAS	43-32521606
CRATEUS	88-36910019	MINIAGOEDAIG		CASCAVEL	45-32254005
FORTALEZA	85-40088555	MINAS GERAIS ARAGUARI	34-32416026	CIANORTE	44-36292842
IGUATU	88-35810512	ARAXA	34-36611132	CURITIBA	41-32648791
ITAPIPOCA	88-36312030	ARCOS	37-33513455	FOZ DO IGUACU	45-35234115
JUAZEIRO DO NORTE	88-35871973	BELO HORIZONTE	31-32254066	IRATI	42-34221337
SOBRAL	88-36110605	BETIM BETIM	31-32254066	LONDRINA	43-33210077
TIANGUA	88-36713336	BOM DESPACHO	37-35322088	MARINGA	44-32264620
UBAJARA	88-36341233			PARANAGUA	41-34235914
ODAMA	00-00041200	CONTAGEM	31-33912994	PARANAVAI	44-34234711
		CORONEL FABRICIANO	31-38411804	PATO BRANCO	46-32242786
DISTRITO FEDERAL		DIVINOPOLIS	37-32212353	PONTA GROSSA	42-30275061
BRASILIA	61-33549615	ELOI MENDES	35-32641245	RIO NEGRO	47-36450251
BRASILIA	61-34451991	GOVERNADOR VALADARES	33-32716040	SANTO ANTONIO DA PLATINA	43-35341809
		GUAXUPE	35-35514124	UMUARAMA	44-30561485

A lista completa e atualizada dos nossos postos autorizados está disponível no site www.philips.com.br/suporte


LISTA DE SERVIÇO AUTORIZADO - BRASIL

CAMMARAGEE	PERNAMBUCO					
CARAMAHUNS 87-37610085 SANTA MARIA 55-30382237 TAPETRINIGA 15-32710308 SANTA MARIA 55-30382237 TAPETRINIGA 15-32710308 SANTA MARIA 55-30382237 TAPETRINIGA 15-32730365 SANTA MARIA 55-30382237 TAPETRINIGA 15-32730365 SANTA MARIA 55-30382237 TAPETRINIGA 15-32730365 SANTA MARIA 55-30382473 TAPETRINIGA 15-32730365 TAPETRINIGA 15-32330365 TAPETRINIGA 15-32330365 TAPETRINIGA 15-32330365 TAPETRINIGA 15-32330365 TAPETRINIGA 15-32330365 TAPETRI		81-34581246	RIO GRANDE	53-32323211	INDAIATUDA	40.00750004
PARLINES 87-37610085 SANTA MARINA 55-3022235 TAQUIAQUIECETUBA 11-4604162 PARLINETA 81-34331142 TRES DE MAIO 55-353898727 TAQUIAQUIECETUBA 11-40230188 RECIFE 81-34856042 TRES DE MAIO 55-35388727 TAQUIAQUIECETUBA 11-40230188 TRESIDE MAIO 55-35388727 TAQUIAQUIECETUBA 11-40230188 TRESIDE MAIO 55-35388727 TAQUIAQUIECETUBA 11-40230188 TRESIDE MAIO 55-35388727 TAQUIACETUBA 11-352238339 TRESIDE MAIO 55-33231390 JALES 17-3832479 JALES 17-3832479 JALES 17-3832479 JALES TAQUIACETUBA 11-352272337 TAQUIACETUBA 11-352272337 TAQUIACETUBA TA						
PAULISTA						
RECIFIE 81-34698042 TRES DE MAIO 55-35389727 TRECIPIE 81-32289183 TRES DE MAIO 55-35389727 TRECIPIE 81-32289183 TRESERIA 51-3221199 TREASOLUTENCO DA MATA 81-32289339 VENANCIO AIRES 51-37411443 JAJU 14-36222117 JAJU 11-39844284 LEME 19-35713528 LIMERA 19-3413286 LIMERA 1						
RECIPIE						
SAOL DURENCO DA MATA 81-3253-389 VENANCIO ARES 51-37411443 JAJU 14-36222117 1-39642234 RODÓNIA CACOAL 69-34431415 CACOAL 69-34273377 LIENE 1-396713328 LIMERA 19-34713282 LIMERA 19-3413286 MARILIA 14-34527283 MARILIA 14-34527283 MARILIA 14-34527283 MARILIA 14-34527283 MARILIA 14-34527283 MARILIA 14-34527283 MARILIA 14-34547437 LINS 14-396227883 MARILIA 14-34547437 MATAO 16-33821046 MAJO MATAO 16-33821046 MAJO MATAO 16-33821046 MAJO MATAO 19-38811917 MOGI DAS CRUZES 11-47941814 MOGI DAS CRUZES MOGI DAS CRUZES 11-479						
PIAUI						
PARNIBA						
PARIABA 86-33222877	OERICA TAETIADA	01-00011401	RONDÔNIA			
PARNAIBA	PIAUÍ		CACOAL	69-34431415		
TERESINA 86-32224615 RORAIMA BOA VISTA BOA V	PARNAIBA	86-33222877	PORTO VELHO	69-32273377		
RORAIMS RORAIMS RORAIMS RORAIMS RORAIMS ROB JANERO ROB JANERO ROB JANERO ROB JANERO ROBERT ROBATA STATE ROBATION RO	TERESINA	86-32230825				
RIO DE JANEIRO	TERESINA	86-32214618	RORAIMA			
RIODE JANEIRO RARRA DO IPIRA			BOA VISTA	95-32249605		
SANTA CATARINA SANT	RIO DE JANEIRO					
BELLFORD ROXO	BARRA DO PIRAI	24-24437745	SANTA CATARINA			
BALNEARIC CAMBORNU	BELFORD ROXO	21-27795797	ARARANGUA	48-35220304		
CAMPOS DOS GOYTACAZES 22.2721499 BILUMENAU 47-332537518 PIRACICABA 19-344444464 CAMPOS DOS GOYTACAZES 22.27271499 BILUSOUE 47-33557518 PORTO FERREIRA 19-35851891 DUQUE DE CAVIAS 21-27711508 CANOINHAS 47-332572181 PRESIDENTE PRUDENTE 18-39161028 ITAGUAI 21-26886491 CHAPECO 49-33221144 PRESIDENTE PRUDENTE 18-39161028 ITAGUAI 22-38258625 CONCORDIA 49-34221704 REGISTRO 13-38212324 ITAGUAI 21-26886491 CHAPECO 49-33221144 REGISTRO 13-38212324 ITAGUAI 21-26886491 CHAPECO 49-33221140 REGISTRO 13-38212324 REGISTRO 11-40295563 IMAGE 21-26333342 CRICIUMA 48-21015555 SALTO 11-40295563 INTEROI 21-26333501 CRICIUMA 49-34423704 REGISTRO 11-40295563 INTEROI 21-26333501 21-26220157 CURITIBANOS 49-32410851 SALTO 11-40295563 INOVA FRIBURGO 22-25227692 FLORIANOPOLIS 48-32649700 SANTOS 13-32272947 RESISNDE 24-33550101 JARAGUA DO SUL 47-334447775 RESISNDE 21-2434070 JACABA 49-35220418 SANTO ANDRE 11-49995288 RIO DE JANEIRO 21-25892030 JOINVILLE 47-33431146 SAO CARLOS 11-3272391 RIO DE JANEIRO 21-25892030 JOINVILLE 47-343131146 SAO CARLOS 16-33614913 RIO DE JANEIRO 21-24315759 LAGUINA 48-36443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-34315759 LAGUINA 48-36443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-24315759 LAGUINA 48-36443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-24315769 RIO DO SUL 47-35211920 SAO PAULO 11-259791184 RIO RESORDO NORTE RIO GRANDE DO NORTE RIO GRANDE DO NORTE RIO GRANDE DO NORTE RIO GRANDE DO SUL 84-32245151 ASIA SAO RAGUIO 11-2997119184 RIO RAGADE DO SUL 84-3224524 FRO RAGAULARA 19-34022914 SAO PAULO 11-297671924 RIO GRANDE DO SUL 54-30211808 ATIBAIA 11-44118145 TABOAO DA SERRA 11-47971480 PARDO 19-38021620 SAO PAULO 11-22966122 RIO GRANDE DO SUL 84-32245151 ASIS 18-3242549 SAO PAULO 11-22966122 RIO GRANDE DO SUL 84-3224551 ASIA SAO SAO PAULO 11-22966122 RIO GRANDE DO SUL 84-3224551 ASIA SAO SAO PAULO 11-22966122 RIO GRANDE DO SUL 84-3224551 ASIA SAO SAO PAULO 11-22966122 RIO GRANDE DO SUL 84-3224551 ASIA SAO SAO PAULO 11-22966122 RIO GRANDE DO SUL 84-324551 ASIA SAO SAO	BOM JESUS DO ITABAPOANA	22-38312216	BALNEARIO CAMBORIU	47-33630706		
DATE	CABO FRIO	22-26451819	BLUMENAU	47-33233907		
DUQUE DE CAXIAS 21-27711508 CANOINHAS 47-36229615 PRESIDENTE PRUDENTE 18-39161028 FACILITY FAC	CAMPOS DOS GOYTACAZES		BRUSQUE	47-33557518		
TAPERUNA 21-26886491 CANCELOU 49-3422704 REGISTRO 13-38212324 MAGE 21-26333342 CRICIUMA 49-241015555 SALTO 11-40286653 NITEROI 21-26220157 CURTIBANOS 49-32410815 SALTO 11-40286653 NOVA FRIBURGO 22-25227692 FLORIANDPOLIS 48-32049700 SANTO ANDRE 11-40286653 NOVA FRIBURGO 22-25227692 FLORIANDPOLIS 48-32049700 SANTO ANDRE 11-40286653 NOVA FRIBURGO 22-2254997 TIAJIA 47-33444770 SANTO ANDRE 11-40286653 NOVA FRIBURGO 22-22454997 TIAJIA 47-33444770 SANTO ANDRE 11-40286653 NOVA FRIBURGO 21-24264702 JOACABA 49-35220418 SAO CARLOS SAO CARTANO DO SUL 11-4227539 RIO DE JANEIRO 21-25098651 LAGES 49-32244414 SAO JOAD A BOA VISTA 19-3632399 RIO DE JANEIRO 21-25098651 LAGES 49-32244414 SAO JOAD A BOA VISTA 19-3632399 RIO DE JANEIRO 21-233810711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PARDO 19-3608760 RIO DE JANEIRO 21-233810711 RIO DO SUL 47-36440973 SAO JOSE DO RIO PARDO 19-3608760 RIO DE JANEIRO 21-27439467 SAO MIGUEL DO OESTE 49-3622006 SAO PAULO 11-26791184 RIO REGINHO 47-36440973 SAO JOSE DO RIO PARDO 11-29791184 RIO REGINHO 47-36440973 SAO JOSE DO RIO PARDO 11-29791184 RIO SEGNADO 48-36261651 TUBARAO 48-36261651 SAO PAULO 11-2676102 SAO PAULO 11-2676102 RIO REGINHO 48-36261651 SAO PAULO 11-2676102 SAO PAULO 11-2676102 SAO PAULO 11-2676102 SAO PAULO 11-2722454 SAO PAULO 11-2722454 SAO PAULO 11-2722454 SAO PAULO 11-2776989 SAO PAULO 11-2	DUQUE DE CAXIAS	21-27711508	CANOINHAS	47-36223615		
MAGE	ITAGUAI	21-26886491	CHAPECO	49-33221144		
MAGE NTEROI 121-26220157 NOVA FRIBURGO 121-26220157 NOVA FRIBURGO 122-2527692 FLORIANOPOLIS 149-32410851 SANTO ANDRE 11-49905288 PETROPOLIS 24-24545997 ITAJA 147-33444777 RESENDE 24-33550101 JARAGIJA DO SUL 47-33722050 SAO BERNARDO CAMPO 11-41257000 SAO ERRANTOS RIO DE JANEIRO 21-24264702 JOACABA RIO DE JANEIRO 21-25692030 JOINVILLE 47-34331148 SAO CARLOS 16-33614913 SAO CARLOS RIO DE JANEIRO 21-25096851 LAGES 49-32244414 SAO JAOAD DA BOA VISTA RIO DE JANEIRO 21-24315759 RIO DE JANEIRO 21-33810711 RIO NEGRINHO 47-35211920 SAO JOSE DO RIO PARDO 17-32325680 SAO PAULO 11-25771891 RIO SAO RANDE DO NORTE MOSSORO 84-33164448 NATAL 84-32132345 AGUAS DE LINDOIA 19-38241524 AGUAS DE LINDOIA 19-382	ITAPERUNA	22-38236825	CONCORDIA	49-34423704		
NTEROI 21-26220157 CURI IBANUS 49-32410851 NOVA FRIBURGO 22-25227692 FLORIANOPOLIS 49-3249700 SANTOS 13-32272947 PETROPOLIS 24-22454997 ITAJAI 47-33444777 RESENDE 24-33550101 JARAGUA DO SUL 47-3372205 SAO BERNARDO CAMPO 11-41257000 RIO DE JANEIRO 21-26892030 JONCABA 49-35220418 SAO CAETANO DO SUL 11-42275339 RIO DE JANEIRO 21-25892030 JONVILLE 47-3372205 SAO CAETANO DO SUL 11-42275339 RIO DE JANEIRO 21-25892030 JONVILLE 47-34331148 SAO CARLOS 16-33614913 RIO DE JANEIRO 21-25992030 JONVILLE 47-34331148 SAO CARLOS 19-36323990 RIO DE JANEIRO 21-24315759 LAGUNA 49-3644153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-3310711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-3310711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PARDO 19-36085760 RIO GEJANEIRO 21-3310711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PARDO 19-36085760 RIO GEJANEIRO 21-3310711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PARDO 19-36085760 RIO GRANDE DO NORTE RIO GRANDE DO NORTE RIO GRANDE DO NORTE RIO GRANDE DO SUL 5Â-32123245 AGUAS DE LINDOIA 19-38241524 SAO PAULO 11-26791184 RIO GRANDE DO SUL 5Â-30213234 AMERICANA 19-34062914 SAO PAULO 11-26796089 RIO GRANDE DO SUL 5Â-30211295 ARACATUBA 18-36218775 RIO GRANDE DO SUL 5Â-30211808 ATIBAIA 11-44118145 TAGOA DA SERRA 11-47126635 RIO GRANDE DO SUL 5Â-30211808 ATIBAIA 11-44118145 TAGOA DA SERRA 11-4761480 RECHIM 5A-33211933 AVARE 14-37322142 TAGOA DA SERRA 11-4761480 RECHIM 5A-33211933 AVARE 14-37322142 TAGOA DA SERRA 11-4761480 RARAU 5A-33211933 AVARE 14-37322142 TAGOA DA SERRA 11-4781480 ROSCICO WESTPHALEN 5A-3324155 CAMPINAS 19-337372500 RARAU 5A-3324155 CAMPINAS 19-337372500 RARAU 5A-3324155 CAMPINAS 19-337372500 RARAU 5A-3321193 AVARE 14-33322142 TAGOA DA SERRA 11-4761480 ROSCICO WESTPHALEN 5A-3321193 AVARE 14-33322142 TAGOA DA SERRA 11-4761480 ROSCICO WESTPHALEN 5A-3321193 AVARE 14-314940551 TAGOA DA SERRA 11-4761480 ROMITENEGRO 51-36224197 CATANDUVA 17-35232524 ARACAJU 79-332176080 ROTOR 5A-33211930 BIRIGU 18-36416376 ROCATANDUVA 17-35222541 TAGOA TAGOA TAGOA TAGOA TAGO	MAGE	21-263333342	CRICIUMA	48-21015555		
NOVA FRIBURGO 22-2527692 FLURIANDPOLIS 48-3204977 SANTOS 13-3227247	NITEROI	21-26220157	CURITIBANOS	49-32410851		
PETROPOLIS 24-22454997 ITAJA	NOVA FRIBURGO	22-25227692	FLORIANOPOLIS	48-32049700		
RIO DE JANEIRO 21-24249702 JOACABA 49-35220418 SAO CAETANO DO SUL 11-42275339 RIO DE JANEIRO 21-25996851 LAGES 49-3224441 SAO JOAO DA BOA VISTA 19-36232990 RIO DE JANEIRO 21-24315759 LAGUNA 48-36443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-24315759 LAGUNA 48-36443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-24315759 LAGUNA 48-36443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-2713214 RIO NECRINHO 47-36440979 SAO JOSE DO RIO PRETO 17-32325680 RIO DE JANEIRO 21-27439467 SAO MIGUEL DO OESTE 49-36220026 SAO PAULO 11-26791184 TERESOPOLIS 21-27439467 SAO MIGUEL DO OESTE 49-36220026 SAO PAULO 11-2676090 RIO GRANDE DO NORTE 500 MIGUEL DO OESTE 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MIGUEL DO OESTE 500 PAULO 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MICUEL 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MICUEL 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MICUEL 500 MICUEL 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MICUEL 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MICUEL 500 MIGUEL 500 MIGUEL DO OESTE 500 PAULO 500 MICUEL 500 MICUEL 500 MIGUEL 500 MIGUEL 500 MICUEL 500 MICU	PETROPOLIS	24-22454997	ITAJAI	47-33444777		
RIO DE JANEIRO 21-28692030 JOINVILLE 47-34331146 SAO CARLOS 16-33614913 RIO DE JANEIRO 21-28992030 JOINVILLE 47-34331146 SAO JOAO DA BOA VISTA 19-36232990 RIO DE JANEIRO 21-24315759 LAGUNA 48-36443153 SAO JOSE DO RIO PARDO 19-36086760 RIO DE JANEIRO 21-24315759 LAGUNA 48-36443153 SAO JOSE DO RIO PARDO 19-36086760 RIO DE JANEIRO 21-24315759 LAGUNA 48-36443153 SAO JOSE DO RIO PARDO 19-36086760 RIO DE JANEIRO 21-27013214 RIO DO SUL 47-35211920 SAO JOSE DO RIO PARDO 17-32325680 SAO GONCALO 21-27013214 RIO DO SUL 47-3644079 SAO JOSE DOS CAMPOS 12-39239508 SAO GONCALO 21-27013214 RIO MERINDO 48-36220026 SAO PAULO 11-26722245 SAO PAULO 11-26722225 SAO PAULO 11-26722225 SAO PAULO 11-26722225 SAO PAULO 11-26722225 SAO PAULO 11-267767690 RIO SERROS 84-33164448 AGERICANA 19-38241524 SAO PAULO 11-39767996 SAO PAULO 11-26722225 SAO PAULO 11-267767699 RIO GRANDE DO SUL SAO PAULO 11-26770899 RIO GRANDE DO SUL SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO ROQUE 11-47125635 RAGOLDA SERRA 11-47871480 SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO ROQUE 11-47125635 RAGOLDA SERRA 11-47871480 SAO ROQUE 11-47125635 RAGOLDA SERRA 11-47871480 SAO ROQUE 11-47125635 RAGOLDA SERRA 11-47871490 SAO ROQUE 11-47125635 RAGOLDA SERRA 11-47871490 SAO ROQUE 11-47125635 RAGOLDA SERRA 11-47871490 VIALINDO 11-257722399 RIO GRANDE DO SERRA 11-47431	RESENDE	24-33550101		47-33722050		
RIO DE JANEIRO 21-25996851 LAGES 49-3224414 SAO JOAO DA BOA VISTA 19-36232990 RIO DE JANEIRO 21-25996851 LAGUNA 48-36443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-33810711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PRETO 17-32325680 RIO DE JANEIRO 21-33810711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PRETO 17-32325680 SAO GONCALO 21-27013214 RIO NEGRINHO 47-36440979 SAO JOSE DOS CAMPOS 12-39239508 SAO GONCALO 21-27439467 SAO MIGUEL DO OESTE 49-36220026 SAO PAULO 11-25767690 TUBARAO 48-36261651 SAO PAULO 11-36676090 SAO PAULO 11-36676090 SAO PAULO 11-3675996 SAO PAULO 11-3677996 SAO PAULO 11-25770899 RIO GRANDE DO SUL AMPARO 19-38072674 SAO PAULO 11-25770899 RIO GRANDE DO SUL AMPARO 19-38072674 SAO PAULO 11-25770899 SERIO GONCALVES 54-34526825 ARARAOUARA 16-33368710 SOROCABA 15-32222311 CANELA 54-32821551 ASSIS 18-33242649 SAO PAULO 11-37272231 SOROCABA 15-32241170 CANELA 54-3281808 ATIBAIA 11-44118145 TABOAO DA SERRA 11-4771480 FRAROUPILHA 54-3268800 BARRETOS 17-33222742 TAUBATE 12-36219090 FRAROUPILHA 54-3268800 BARRETOS 17-33222742 TAUBATE 12-36219090 FRAROUPILHA 54-33688101 BAURU 14-31049551 UID 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UID 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UID 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UID 55-33321193 DIADEMA 11-40430850 ITABAINA 79-34310023 PASSO FUNDO 54-33111104 FRANCA 16-37223891 TOCANTINS PROTON 15-3421100 FRANCO 15-34413859 IDADEMA 11-40430850 ITABAINA 79-34310023 PASSO FUNDO 54-33111104 FRANCA 16-37223891 TOCANTINS PROTON 15-3421100 SORIO 55-333111104 FRANCA 16-37223893 TOCANTINS PROTON 15-33222694 PRANCA 11-344311505 GURUPI 63-333511038 PORTON 15-34231030 BURDINO 15-333511038 POR	RIO DE JANEIRO	21-24264702				
RIO DE JANEIRO 21-26396851 LAGUNA 48-364443153 SAO JOSE DO RIO PARDO 19-36085760 RIO DE JANEIRO 21-3315759 LAGUNA 48-364443153 SAO JOSE DO RIO PARDO 17-32325880 RIO DE JANEIRO 21-3316711 RIO DO SUL 47-35211920 SAO JOSE DO RIO PRETO 17-32325880 SAO GONCALO 21-27013214 RIO NEGRINHO 47-38440979 SAO JOSE DOS CAMPOS 12-39239508 RIO RIO PRETO 17-32325800 SAO PAULO 11-29791184 SAO MIGUEL DO DESTE 49-36220026 SAO PAULO 11-26791184 SAO PAULO 11-2676080 SAO PAULO 11-267722245 SAO PAULO 11-39757996 SAO PAULO 11-26770899 RIO GRANDE DO SUL SAO PAULO 11-26770899 RIO GRANDE DO SUL SAO PAULO 11-26770899 SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO PAULO 11-25770899 SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO PAULO 11-25770899 SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO PAULO 11-25770899 SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO PAULO 11-25770899 SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO PAULO 11-25770899 SAO PAULO 11-2570899 RIO GRANDE DO SUL SAO PAULO 11-2570899 SAO PAULO 11-32222311 SAO	RIO DE JANEIRO	21-25892030				
RIO DE JANEIRO 21-3381/759 LAGUIN 49-36449179 SAO JOSE DO RIO PRETO 17-32325880 RIO DE JANEIRO 21-3381/759 RIO DE JANEIRO 21-3381/759 RIO DE JANEIRO 21-27439467 RIO NEGRINHO 47-36440979 SAO JOSE DO SCAMPOS 12-39239508 RIO RESPONDE 21-27439467 RIO NEGRINHO 47-36440979 SAO JOSE DOS CAMPOS 12-39239508 RIO RESPONDE 21-27439467 RIO NEGRINHO 47-36440979 SAO JOSE DOS CAMPOS 12-39239508 RIO RESPONDE 21-27439467 RIO NEGRINHO 47-36440979 SAO PAULO 11-29791184 RIO NEGRINHO 11-29791184 RIO NEGRINHO 11-29791184 RIO NATAL 84-33164448 SAO PAULO 11-29791184 RIO SAO PAULO 11-297951184 RIO SAO PAULO 11-39757996 RIO GRANDE DO SUL AMERICANA 19-34062914 SAO PAULO 11-2866122 RIO GRANDE DO SUL AMERICANA 19-34062914 SAO PAULO 11-22966122 RIO GRANDE DO SUL AMERICANA 19-38072674 SAO PAULO 11-22966122 RIO GRANDE DO SUL AMERICANA 19-38072674 SAO PAULO 11-22966122 RIO GRANDE DO SUL AMERICANA 18-36218775 SAO ROQUE 11-47125635 ROMEA 15-32241170 CANELA 54-34626825 ARARAQUARA 16-33588710 SOROCABA 15-32241170 CANELA 54-32821551 ASSIS 18-33242649 TABOAO DA SERRA 11-47871480 RECHIM 54-33211933 AVARE 14-37322142 TABOAO DA SERRA 11-47871480 RECHIM 54-33221893 BIRIGUI 18-36416376 VOLUNHOS 19-38716629 GRAVATAI 55-30422830 BIRIGUI 18-36416376 VOLUNHOS 19-38716629 RIGGUI 14-3742490 ULIA 54-33424571 CATANDUVA 17-35232524 ARACAJU 79-32176080 MARAU 54-33424571 CATANDUVA 17-35232524 ARACAJU 79-34313023 NOVO HAMBURGO 51-36324187 CRUZEIRO 12-31433859 ITABAINA 79-34313023 NOVO HAMBURGO 51-36324187 CRUZEIRO 12-31433859 ITABAINA 79-34313023 NOVO HAMBURGO 51-3632487 CRUZEIRO 12-31433859 ITABAINA 79-34313023 PARGUI 54-332226841 FRANCA 11-44431153 GURNUPI 63-33351108 PARGUI FRANCA 11-24431153 GURNUPI 63-33351108 PARGUI FRANCA 11-24431153 GURNUPI 63-33351108 PARGUI FRANCA 11-24431153 GURNUPI 63-333511038 PARGU	RIO DE JANEIRO	21-25096851				
RIO DE JANEIRO 21-37817171 RIO DUSUL 47-38440979 SAO JOSE DOS CAMPOS 12-39239508 SAO GRANDE DO SCAMPOS 12-39239508 SAO GRANDE DO NORTE SAO MIGUEL DO DESTE 49-36220026 SAO PAULO 11-29791184 SAO PAULO 11-26766090 SAO PAULO 11-26766090 SAO PAULO 11-2676090 SAO PAULO 11-2677996 SAO PAULO 11-2677996 SAO PAULO 11-2977996 SAO PAULO 11-38457575 SAO PAULO 11-38457575 SAO PAULO 11-38457575 SAO PAULO 11-2966122 SAO PAULO 11-25770899 SAO PAULO 11-2966122 SAO PAULO 11-25770899 SAO PAULO 11-25770899 SAO PAULO 11-2966122 SAO PAULO 11-25770899 SAO PAULO 11-2966122 SAO PAULO 11-2966122 SAO PAULO 11-25770899 SAO PAULO 11-2966122 SAO PAULO 11-2966122 SAO PAULO 11-25770899 SAO PAULO 11-2966122 SAO PAULO	RIO DE JANEIRO	21-24315759				
RIO GRANDE DO NORTE MSAO PAULO 11-29791184 SAO MIGUEL DO OESTE 49-36220026 SAO PAULO 11-26722245 SAO PAULO 11-39767996 SAO PAULO 11-267707699 SAO PAULO 11-267707699 RIO GRANDE DO SUL AMERICANA 19-34062914 SAO PAULO 11-25770899 RIO GRANDE DO SUL AMPARO 19-38072674 SAO PAULO 11-25770899 RIO GRANDE DO SUL AMPARO 19-38072674 SAO PAULO 11-25770899 RIO GRANDE DO SUL SAO PAULO 11-25770899 AMPARO 19-38072675 SAO ROQUE 11-47126635 RARCATUBA 18-36218775 SAO ROQUE 11-47126635 RARCATUBA 18-332242649 TABOAO DA SERRA 11-47871480 CAXIAS DO SUL 54-30211808 ATIBAIA 11-44118145 TABOAO DA SERRA 11-47871480 ERECHIM 54-33211933 AVARE 14-37322142 TAUBARTE 12-36219080 FARROUPILHA 54-38281631 BAIRETOS 17-33227407 TUPA 14-34962596 GRAVATAI 51-30422830 BIRIGUI 18-38416376 VOLINHOS 19-38716629 VOTUPORANGA 17-34214940 ULI 55-33327766 BOTUCATU 14-38134990 UAINHOS 19-38716629 ARACAU 79-32176080 MARAU 54-33424571 CATANDUVA 17-35222524 ARACAU 79-34313023 LAGARTO 79-36312656 CSORIO 51-36823541 CRUZEIRO 12-31433859 ITABAINA 79-34313023 CSORIO 51-36823541 CRUZEIRO 12-31433859 ITABAINA 79-34313023 CSORIO 51-36823541 FRANCA 16-37223894 ERENANCA 16-	RIO DE JANEIRO	21-33810711				
RIO GRANDE DO NORTE MOSSORO 84-33164448 SÃO PAULO 11-26767996 NATAL 84-32132345 AGUAS DE LINDOIA 19-38241524 SAO PAULO 11-39757996 NATAL 84-32132345 AGUAS DE LINDOIA 19-38241524 SAO PAULO 11-39457996 RIO GRANDE DO SUL AMPARO 19-38072674 SAO PAULO 11-26770899 RIO GRANDE DO SUL AMPARO 19-38072674 SAO PAULO 11-26770899 BAGE 53-32411295 ARACATUBA 18-36218775 SAO ROULE 11-47125635 BENTO GONCALVES 54-34526825 ARARAQUARA 16-33368710 SOROCABA 15-32241170 CANELA 54-32821551 ASSIS 18-33242649 SAO PAULO 11-26770899 RECHIM 54-30211808 ATIBAIA 11-44118145 TABOAO DA SERRA 11-4771480 ERECHIM 54-3281391 AVARE 14-37322142 TAQUARITINGA 16-32524039 FREDERICO WESTPHALEN 55-37441850 BAURU 14-31049551 VALINHOS 19-38716629 RARAQUI 55-33327766 BOTUCATU 14-38134090 ILAJEADO 51-37145155 CAMPINAS 19-37372500 SERGIPE MARAU 54-33242571 CATANDUVA 17-35222524 ARACAJU 79-32176080 MONTENEGRO 51-36632547 FERDAMADOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223893 DURDINO 54-33111104 FRANCA 16-37223893 GURUPI 63-33511038	SAO GONCALO	21-27013214				
RIO GRANDE DO NORTE	TERESOPOLIS	21-27439467				
SAO PAULO			TUBARAO	48-36261651		
MOSSORO						
NATIAL 84-32732345 AGUAS DE LINDOIA 19-382241524 SAO PAULO 11-22966122						
RIO GRANDE DO SUL BAGE 53-32411295 ARACATUBA ARRAQUARA 19-38072674 ARACATUBA 18-38218775 ARACATUBA 18-38221871 ARACATUBA 18-3821876 ARACATUBA ARACATUBA 18-3821876 ARACATUBA 18-3821876 ARACATUBA 18-3821876 ARACATUBA 18-3821876 ARACATUBA 18-3821876 ARACATUBA ARACATUBA 18-3821876 ARACATUBA 18-3821876 ARACATUBA 18-3821876 ARACATUBA 18-38221824 ARACATUBA ARACATUBA 18-38221824 ARACATUBA 18-382218						
AMPARO	PAU DOS FERROS	84-33512334	AMERICANA			
BAGE 53-32411295 ARACAI UBA 18-3621877 SAO ROQUE 11-47125635 BENTO GONCALVES 54-34526825 ARACAQUARA 16-33368710 SOROCABA 15-32241170 SOROCABA 15-32241710 SOROCABA 15-32241170 SOROCABA 15-32241170 SOROCABA 15-32241170 SOROCABA 15-32241710 SOROCABA 15-32241710 SOROCABA 15-32241170 SOROCABA 15-32241710 SOROCABA 15-322240 SOROCABA 15-322241710 SOROCABA 15-322241710 SOROCABA 15-3222417 SOROCABA 15-322251 SOROCABA 15-322263 SOROCABA 15-3222631 SOROCABA 15-3222631 SOROCABA 15-3222649 TOROCABA 15-3222649 TOROCABA 15-3222630 SOROCABA 15-3222631 SOROCABA 15-3222633 SOROCABA 15-322263 SOROCABA 15-322	RIO GRANDE DO SUL					
BENTO GONCALVES 54-34526825 ARARAQUARA 16-33388710 SOROCABA 15-32241170 CANELA 54-32821551 ASSIS 18-33242649 TABOAO DA SERRA 11-47871480 CANELA ASSIS 18-33242649 TABOAO DA SERRA 11-47871480 ERECHIM 54-32524039 BARRETOS 17-33222742 TAQUARITINGA 16-32524039 FREDERICO WESTPHALEN 55-37441860 BAURU 14-31049551 TUPA 14-34962596 TUPA 14-34962596 TUPA 14-34962596 TUPA 14-34962596 TUPA 14-34962596 TUPA TUP	BAGE	53-32411295				
CANIELA 54-32821551 ASSIS 18-33242649 TABOAO DA SERRA 11-47871480 CAXIAS DO SUL 54-30211808 ATIBAIA 11-44118145 TAQUARITINGA 16-32524039 ERECHIM 54-33211933 AVARE 14-37322142 TAUBATE 12-36219080 FARROUPILHA 54-38283603 BARRETOS 17-33222742 TAUBATE 12-36219080 FREDERICO WESTPHALEN 55-37441850 BAURU 14-31049551 VALINHOS 19-38716629 GRAVATAI 51-30422830 BIRIGUI 18-36416376 VOTUPORANGA 17-34214940 UIU 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UILEADO 51-37145155 CAMPINAS 19-37372500 MARAU 54-33424571 CATANDUVA 17-35232524 ARACAJU 79-32176080 MONTENEGRO 51-36324187 CRUZEIRO 12-31433859 ITABAINAA 79-34313023 NOVO HAMBURGO 51-36529191 DIADEMA 11-40430669 LAGARTO 79-36312656 OSORIO 51-36632524 FERNANDOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223898 PORTO ALEGRE 51-32226841 BURDINGA 12-31335030 ARAGQUINA 63-34111818 PORTO ALEGRE 51-32226841 BURDINGA 16-2124431153 GURUPI 63-33511038	BENTO GONCALVES	54-34526825				
CAXIAS DO SUL 54-30211808 AI IBAIA 11-44118145 TAQUARITINGA 16-32524039 ERECHIM 54-33211933 AVARE 14-37322142 TAUBATE 12-36219080 FARROUPILHA 54-32683603 BARRETOS 17-33222742 TUPA 14-34962596 TUPA 14-34962596 FREDERICO WESTPHALEN 55-37441850 BAURU 14-31049551 TUPA 14-34962596 GRAVATAI 51-30422830 BIRIGUI 18-36416376 VALINHOS 19-38716629 UVII 19-35-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UVII 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UVII CATANDUVA 17-35232524 ARACAJU 79-32176080 MONTENEGRO 51-36324187 CRUZEIRO 12-31433859 ITABAIANA 79-34313023 NOVO HAMBURGO 51-35823191 DIADEMA 11-40430669 LAGARTO 79-36312656 OSORIO 51-36632524 FERNANDOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223898 TOCANTINS PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-34111818 PORTO ALEGRE 51-32226931 BURDINGA 18124437155 GURUPI 63-33511038	CANELA	54-32821551				
ERECHIM 54-38211933	CAXIAS DO SUL	54-30211808				
FARROUPILHA 54-32683603 BARKE IOS 17-33222742 TUPA 14-34962596 FREDERICO WESTPHALEN 55-37441850 BAURU 14-31494951 VALINHOS 19-38716629 GRAVATAI 51-30422830 BIRIGUI 18-36416376 VOTUPORANGA 17-34214940 IUI 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 LAIEADO 51-37145155 CAMPINAS 19-37372500 SERGIPE MARAU 54-33424571 CATANDUVA 17-35232524 ARACAJIU 79-32176080 MONTENEGRO 51-36324187 CRUZEIRO 12-31433859 ITABAIANA 79-34313023 NOVO HAMBURGO 51-368325191 DIADEMA 11-40430669 LAGARTO 79-36312656 OSORIO 51-33632524 FERNANDOPOLIS 17-3423752 TOCANTINS PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-3411188 PORTO ALEGRE 51-32226941 GUARAULHOS 11-24431153 GURUPI 63-33511038	ERECHIM	54-33211933				
FREDERICO WESTPHALEN 55-37441850 BAURU 14-31049551 VALINHOS 19-38716629 GRAVATAI 51-30422830 BIRIGUI 18-3646376 VOTUPORANGA 17-34214940 UIU 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UIU 15-34214940 UIU 15-34214940 UIU 15-34214940 UIU 15-34214940 UIU 14-38134090 SERGIPE VALINHOS 18-3424571 CATANDUVA 17-35232524 ARACAJU 79-32176080 MONTENEGRO 51-36324187 CRUZEIRO 12-31433859 ITABAIANA 79-34313023 VALINHOS 18-36632524 FERNANDOPOLIS 17-34423752 UAGARTO 79-36312656 UAGART						
GRAVATAI 51-30422830 BIRIGUI 18-36416376 VOTUPORANGA 17-34214940 UIU 55-33327766 BOTUCATU 14-38134090 VOTUPORANGA 17-34214940 UIU 55-3327766 BOTUCATU 14-38134090 SERGIPE	FREDERICO WESTPHALEN					
UI 5-33327766 BOTUCATU 14-38134090						
MARAU 54-3424571 CATANDUVA 17-35232524 ARACAJU 79-32176080 MONTENEGRO 51-36324187 CRUZEIRO 12-31433859 ITABAJANA 79-34313023 NOVO HAMBURGO 51-36632524 FERNANDOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223898 TOCANTINS PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-34111818 PORTO ALEGRE 51-32226941 GUARAULHOS 11-24431153 GURUPI 63-33511038						
MONTENEGRO 51-36324187 CRUZEIRO 12-31433859 ITABAINAA 79-34313023 NOVO HAMBURGO 51-35823191 DIADEMA 11-40430669 LAGARTO 79-36312656 OSORIO 51-36632524 FERNANDOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223693 TOCANTINS PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-34111818 PORTO ALEGRE 51-32226941 GUARATINGUETA 12-31335030 GURUPI 63-33511038					SERGIPE	
NOVO HAMBURGO 51-35823191 DIADEMA 11-40430669 LAGARTO 79-36312656 OSORIO 51-36632524 FERNANDOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223898 TOCANTINS PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-34111818 PORTO ALEGRE 51-32226941 GUARALIHOS 11-24431153 GURUPI 63-33511038					ARACAJU	79-32176080
OSORIO 51-36632524 FERNANDOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223898 TOCANTINS PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-34111818 PORTO ALEGRE 51-32226941 GUARAULHOS 11-24431153 GURUPI 63-33511038					ITABAIANA	79-34313023
OSORIO 51-36632524 FERNANDOPOLIS 17-34423752 PASSO FUNDO 54-33111104 FRANCA 16-37223898 TOCANTINS PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-34111818 PORTO ALEGRE 51-32226941 GUARATINGUETA 16-244331153 GURUPI 63-33511038					LAGARTO	79-36312656
PELOTAS 53-32223633 GUARATINGUETA 12-31335030 ARAGUAINA 63-34111818 PORTO ALEGRE 51-32226941 GUARULHOS 11-24431153 GURUPI 63-33511038						
PORTO ALEGRE 51-32226941 GUARULHOS 11-24431153 GURUPI 63-33511038					TOCANTINS	
10110 ALEGNE 31-32220941 63-33511038					ARAGUAINA	63-34111818
PORTO ALEGRE 51-33256653 IBITINGA 16-33417665 PALMAS 63-32175628					GURUPI	63-33511038
	PORTO ALEGRE	51-33256653	IBITINGA	16-3341/665	PALMAS	63-32175628

Language Code

Abharazian 6566 Inupiaq 7375 Pushto 8083 Afrikaans 6570 Islenska 7383 Quechua 8185 Afrikaans 6577 Italiano 7384 Raeto-Romance 8277 Arabic 6582 Ivrit 7299 Romanian 8279 Armenian 7289 Japanese 7465 Samoan 8377 Avestan 6569 Kalaallisut 7576 Sango 8371 Avestan 6589 Kantanda 7578 Sanskrit 8365 Azerhaijani 6570 Kashmiri 7583 Sardinian 8367 Azerhaijani 6570 Kashmiri 7583 Sardinian 8365 Bahasa Melyu 7783 Kazakh 7575 Shapa 8378 Bashkir 6669 Kernewek 7587 Shona 8378 Belarusian 6672 Kiryarwanda 8287 Sindhi 8333 Bishar 6672 Kiryarwanda						
Afrikaans 6570 Islenska 7383 Quechua 8185 Amharic 6582 Ivrit 7269 Romanian 8277 Armenian 7289 Japanese 7465 Rundi 8278 Assamese 6583 Javanese 7486 Samoan 8377 Avestan 6569 Kalaallisut 7576 Sango 8371 Aymara 6589 Kananda 7578 Sanskrit 8365 Azerhaljani 6590 Kashmiri 7583 Sardinian 8365 Azerhaljani 6690 Kashmiri 7575 Sango 8371 Bashidr 6669 Kernewek 7587 Shona 8381 Bashar Melyu 7783 Kazakh 7579 Shona 8381 Bashari 6669 Kimer 7577 Shona 8381 Baltaru 66671 Kori Kirghiz 7586 Slovenska Bosanski 6673 Komi 7586			• •			
Amharic 6577 Italiano 7384 Raeto-Romance 8277 Arabic 6582 Ivrit 7269 Romanian 8278 Armenian 7289 Japanese 7486 Samoan 8377 Assamese 6589 Kalailisut 7576 Sango 8371 Aymara 6589 Kahalisut 7578 Sanskrit 8365 Azerhajiani 6590 Kashmiri 7583 Sardinian 8365 Bahasa Melayu 7783 Kazakh 7575 Serbian 8382 Belarusian 6669 Khmer 7577 Shqip 8381 Belarusian 6678 Kimyarawanda 8287 Sindhi 3338 Bishari 6673 Komi 7586 Slovensky 8373 Bishari 6672 Kirghiz 7589 Sindhiese 8373 Bishari 6672 Kirghiz 7589 Slovensky 8373 Bokmäl, Norwegian 7866 Korean						
Arabic 6582 Ivrit 7269 Romanian 8279 Armenian 7289 Japanese 7465 Rundi 8278 Assamese 6583 Javanese 7486 Samoan 8377 Avestan 6589 Kalalilisut 7576 Sango 8371 Aymara 6589 Kananda 7578 Sanskrit 8365 Azerhaijani 6590 Kashmiri 7583 Sardinian 8367 Bahasi Melayu 783 Kazakh 7575 Serbian 8382 Bashkiri 6669 Khmer 7577 Shqip 8378 Belarusian 6669 Khmer 7577 Shqip 8381 Bishari 6678 Kiriyarwanda 8287 Sinchia 8368 Bishari 6673 Korni 7586 Slovensky 8373 Bosanski 6683 Kuaryama; Kwanyama 7579 Slovenian 8376 Brezhoneg 6682 Kurdish Sa						
Armenian 7289 Japanese 7465 Rundi 8278 Assamese 6583 Javanese 7486 Samoan 8377 Avestan 6569 Kalallisut 7376 Sangkrit 8315 Aymara 6589 Kashiri 7378 Sanskrit 8365 Bahasa Melayu 783 Kazakh 7575 Septian 8382 Bahari 6665 Kernewek 7587 Shona 8378 Belarusian 6678 Kinghiz 7589 Sinhales 8373 Bishari 6672 Kirghiz 7589 Sinhalese 8373 Bishari 6672 Kirghiz 7589 Sinhalese 8373 Bokmali, Norwegian 7666 Korean 7579 Shop Sevenian 3376 Bosanski 6682 Kurdish 7585 Sothic Sovenian 3376 Botharial, Norwegian 7666 Korean 7579 South Ndebele 7882 Burmese 77						
Assamese 6589 Kahalilisut 756 Sango 8371 Avestan 6589 Kahalilisut 7576 Sango 8371 Aymara 6589 Kashmiri 7583 Sarskrit 8365 Azerhaijani 6590 Kashmiri 7583 Sardinian 8367 Bahasi Melayu 783 Kazakh 7575 Serbian 8382 Bashkir 6669 Khmer 7577 Shqip 8381 Belarusian 6669 Khmer 7577 Shqip 8381 Belarusian 6669 Khmer 7577 Shqip 8381 Blariar 6678 Kirghiz 7589 Sindhies 8373 Bokmali, Norwegian 7866 Korean 5379 Slovenian 8373 Bosanski 6683 Kuaryama; Kwanyama 7574 Sombia 8373 Brezhoneg 6681 Kuryama; Kwanyama 7574 Sombia 8378 Bulgarian 6671 Lao						
Avestan 6569 Kalaallisut 7576 Sango 8371 Aymara 6589 Kannada 7578 Sanskrit 8365 Azerhajjani 6590 Kashmiri 7583 Sardinian 8382 Bahasa Melayu 7783 Kazakh 7575 Serbian 8382 Bahasa Melayu 6665 Kernewek 7587 Shona 8378 Belarusian 6669 Khmer 7577 Shqip 8381 Belarusian 6672 Kirghiz 7589 Shqip 8368 Bihari 6673 Komi 7586 Slovenian 8373 Bokmål, Norwegian 7866 Korean 7579 Slovenian 8373 Bokmål, Norwegian 7666 Korean 7579 Slovenian 8373 Bokmål, Norwegian 6682 Kurdish 7585 Schoch; Southern 8373 Burgarian 6672 Latina 7665 Sucatin 83378 Castellano, Español 6983<	Armenian	7289	Japanese	7465	Rundi	8278
Aymara 6589 Kannada 7578 Sanskrit 8365 Azerhaljani 6590 Kashmiri 7583 Sardinian 8367 Bashkir 6665 Kernewek 7575 Serban 8382 Bashkir 6665 Kernewek 7587 Shona 8378 Bengali 6678 Kinyarwanda 8287 Sindhi 8368 Bishari 6672 Kirghiz 7589 Sindhi 8368 Bishari 6672 Kirghiz 7589 Sindhialese 3373 Bokmål, Norwegian 7866 Korean 7579 Sochenian 8376 Bokmål, Norwegian 6683 Kuarlsh 7585 Slovenslan 8373 Brezhoneg 6682 Kurdish 7585 Scotheria 8373 Burgarian 671 Lao 7679 South Mebele 7882 Burmese 7789 Latian 7665 Sundanese 3385 Chatalian 6765 Letzeburge	Assamese	6583	Javanese	7486	Samoan	8377
Azerhaljani 6590 Kashmiri 7583 Sardinian 8367 Bahsa Melayu 7783 Kazakh 7575 Serbian 8382 Bahrir 6665 Kernewek 7587 Shona 8378 Belarusian 6669 Khmer 7577 Shop Shidhi 8368 Bihari 6672 Kirghiz 7589 Sindhi 8368 Bislama 6673 Komi 7586 Slovensky 8373 Bosanski 6683 Kurdish 7585 Slovensky 8373 Bosanski 6681 Kurdish 7585 Sochto, Southern 8374 Bulgarian 6671 Lao 7679 South Ndebele 7882 Burmese 7789 Latina 7665 Suomi 3373 Castellano, Español 6983 Latvian 7686 Suomi 7073 Castellano, Español 6983 Latvian 7686 Suomi 7073 Chamorro 6772	Avestan	6569	Kalaallisut	7576	Sango	8371
Bahasa Melayu 7783 Kazakh 7575 Serbian 8382 Bashkir 6665 Kernewek 7587 Shona 8378 Bengali 6678 Kinyarwanda 8287 Sindhi 8381 Bengali 6672 Kirghiz 7589 Sinhari 8373 Bislama 6673 Komi 7586 Slovensky 8373 Bokmål, Norwegian 7866 Korcan 7579 Slovenian 8376 Bosanski 6681 Kuaryama; Kwanyama 7574 Soma 8373 Brezhoneg 6682 Kurdish 7585 Sothor; Southern 8381 Burmese 7789 Latina 7665 Sundianese 8385 Castellano, Español 6983 Latvian 7686 Swahili 8387 Charene 6769 Ligala 7679 South Mebele 7882 Chechen 6769 Ligala 7678 Swahili 8386 Cheven; Chichewa; Nyanja 7889 <td>Aymara</td> <td>6589</td> <td>Kannada</td> <td>7578</td> <td>Sanskrit</td> <td>8365</td>	Aymara	6589	Kannada	7578	Sanskrit	8365
Bashkir	Azerhaijani	6590	Kashmiri	7583	Sardinian	8367
Belarusian 6669 Khmer 7577 Shqip 8381 Rinyarwanda 8287 Sindhi 8368 Rinyarwanda 8287 Sindhi 8379 Rinyarwanda 8287 Sindhi 8373 Rinyarwanda 8287 Sindhi 8373 Rinyarwanda 8287 Sindhi 8379 Rinyarwanda 8287 Sindhi 8379 Rinyarwanda 8287 Sindhi 8387 Sindhi 8387 Rinyarwanda Rinya	Bahasa Melayu	7783	Kazakh	7575	Serbian	8382
Bengali	Bashkir	6665	Kernewek	7587	Shona	8378
Bislama	Belarusian	6669	Khmer	7577	Shqip	8381
Bislama	Bengali	6678	Kinyarwanda	8287	Sindhi	8368
Bokmål, Norwegian 7866 Korean 7579 Slovenian 8376 Bosanski 6683 Kuanyama; Kwanyama 7574 Somali 8379 8379 Borezhoneg 6682 Kurdish 7585 Sotho; Southern 8384 Bulgarian 6671 Lao 7679 South Ndebele 7882 Bulgarian 6671 Lao 7679 South Ndebele 7882 Sotho; Southern 8384 South Ndebele 7882 South Ndebele 7673 South Ndebele 7678 South Ndebele 7775 Tamil 8465 Tagalog 8476 Tagal	Bihari	6672	Kirghiz	7589	Sinhalese	8373
Bosanski 6682	Bislama	6673	Komi	7586	Slovensky	8373
Bosanski 6682 Kuanyama; Kwanyama 7574 Somali 8379 Brezhoneg 6682 Kurdish 7585 Sotho; Southern 8384 Bulgarian 6671 Lao 7679 South Ndebele 7882 Burmese 7789 Latina 7665 Sudanese 8385 Castellano, Español 6983 Latvian 7686 Suomi 7073 Catalán 6765 Letzeburgesch; 7666 Swahili 8387 Chechen 6769 Limburgan; Limburger 7673 Swati 8383 Chechen 6769 Limburgan; Limburger 7678 Svenska 8386 Chechen 6769 Limburgan; Limburger 7678 Svati 8383 Chechen 6769 Limburgan; Limburger 7673 Swati 8383 Chechen 6769 Lizucenbourgish; 7666 Tahitata 8489 Chuars Zhuara 782 Talit 8471 1481 1492 1492 </td <td>Bokmål, Norwegian</td> <td>7866</td> <td>Korean</td> <td>7579</td> <td>Slovenian</td> <td>8376</td>	Bokmål, Norwegian	7866	Korean	7579	Slovenian	8376
Brezhoneg 6682 Kurdish 7585 Sotho; Southern 8384 Bulgarian 6671 Lao 7679 South Ndebele 7882 Burmese 7789 Latina 7665 South Ndebele 7882 Southorse 8385 Sotho; South Ndebele 7882 South 7882 South Ndebele 7882 South Ndebele 7882 South Ndebele 7882 South 7882 Sout			Kuanyama; Kwanyama	7574		8379
Bulgarian 6671					Sotho: Southern	
Burmese 7789 Latina 7665 Sundanese 8385 Castellano, Español 6983 Latvian 7686 Suomi 7073 7073 7073 7073 7073 7073 8387						
Castellano, Español 6983 Latvian 7686 Suomi 7073 Catalán 6765 Letzeburgesch; 7666 Swahili 8387 Chamorro 6772 Limburgan; Limburger 7678 Swati 8386 Chechen 6769 Lingala 7678 Svenska 8386 Chewa; Chichewa; Nyanja 7889 Lithuanian 7684 Tagalog 8476 中文 Delegan Marathian 775 Tajik 8471 Churash 6785 Macedonian 7775 Tajik 8471 Churash 6785 Malgasy 7771 Tamil 8465 Churash 6786 Mayar 7285 Tatar 8484 Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6869 Marx 7186 Tibetan 6679 Deutsch 6869 Marshilles 7772	•					
Catalán 6765 Letzeburgesch; 7666 Swahili 8387 Chamorro 6772 Limburgan; Limburger 7673 Swati 8383 Chechen 6769 Lingala 7678 Svenska 8386 Chewa; Chichewa; Nyanja 7889 Lithuanian 7684 Tagalog 8476 d ↑ ♀ 9072 Luxembourgish; 7666 Tahitian 8489 Chuang; Zhuang 9065 Macadonian 7775 Tajik 8471 Church Slavic; Slavonic 6785 Malagasy 7771 Tamil 8465 Church Slavic; Slavonic 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 1186 Tibetan 6679 Deutsch 6869 Marathi 7772 Tsonga 18473 Esperanto 6978 <th< td=""><td></td><td></td><td></td><td></td><td></td><td></td></th<>						
Chamorro 6772 Limburgan; Limburger 7673 Swati 8383 Chechen 6769 Lingala 7678 Svenska 8386 Chewa; Chichewa; Nyanja 7889 Lithuanian 7684 Svenska 8386 Chwash 9072 Luxembourgish; 7666 Tahitian 8489 Churash 6785 Malagasy 7771 Tajik 8471 Churash 6785 Malagasy 7771 Tamil 8465 Chuvash 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malagasy 7771 Tamil 8465 Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 1186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Esperanto 6978 Marshallese 7772						
Chechen 6769 Lingala 7678 Svenska 8386 Chewa; Chichewa; Nyanja 7889 Lithuanian 7684 Tagalog 8476 ṁ² 9072 Luxembourgish; 7666 Tahittian 8489 Chundig; Zhuang 9065 Macedonian 7775 Tajik 8471 Church Slavic; Slavonic 6785 Malagasy 7771 Tamil 8465 Chuvash 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian						
Chewa; Chichewa; Nyanja 7889 Lithuanian 7684 Tagalog 8476 ψ Σ 9072 Luxembourgish; 7666 Tahitian 8489 Chuang; Zhuang 9065 Macedonian 7775 Tajik 8471 Churosh 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malayalam 7776 Telugu 8465 Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian 7779 Tswana 8478 Estonian 6984 Mongolian 77						
中文 9072 Luxembourgish; 7666 Tahitian 8489 Chuang; Zhuang 9055 Macedonian 7775 Tajiik 8471 Church Slavic; Slavonic 6785 Malagasy 7771 Tamil 8465 Chuvash 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malagyalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tsonga 18473 Esperanto 6979 Moldavian 7772 Tsonga 8483 Esperanto 6979 Moldavian 7779 Tswana 8478 Estonian 6984 Mongolian 7778 Türkçe 8482 Euskara 6985 Nauru 7886 <td></td> <td></td> <td>0</td> <td></td> <td></td> <td></td>			0			
Chuang; Zhuang 9065 Macedonian 7775 Tajik 8471 Church Slavic; Slavonic 6785 Malagasy 7771 Tamil 8465 Chuvash 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian 7778 Türkçe 8482 Euskara 6985 Nauru 7865 Türkçe 8482 Euskara 6985 Nauru 7865 Türkmen 8475 Faroese 7079 Ndebele, North <t< td=""><td>, ,</td><td></td><td></td><td></td><td>0 0</td><td></td></t<>	, ,				0 0	
Church Slavic; Slavonic 6785 Malagasy 7771 Tamil 8465 Chuvash 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malayalam 7776 Telugu 8469 essky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian 7779 Tswana 8478 Estonian 6984 Mongolian 7778 Türkçe 8482 Euskara 6985 Nauru 7865 Turkmen 8475 Faroese 7079 Ndebele, North 7868 Uighur 8571 Français 7082 Ndeyel N	1 7 7					
Chuvash 6786 Magyar 7285 Tatar 8484 Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6978 Marshallese 7772 Tswana 8479 Estonian 6984 Mongolian 7778 Türkçe 8482 Euskara 6985 Nauru 7865 Turkmen 8475 Faroese 7079 Ndebele, North 7866 Twi 8487 Faroese 7079 Ndebele, South 7882 Ukrainian 8575 Frysk 7089 Ndonga 7871					•	
Corsican 6779 Malayalam 7776 Telugu 8469 esky 6783 Maltese 7784 Thai 8472 Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian 7779 Tswana 8478 Estonian 6984 Mongolian 7778 Türkçe 8482 Euskara 6985 Nauru 7865 Turkmen 8475 Faroese 7079 Ndebele, North 7866 Twi 8487 Faracese 7079 Ndebele, South 7882 Ukrainian 8575 Frysk 7082 Ndonga 7871 Urdu 8582 Fijian 7074 Nederlands 7876						
Beskry 6783						
Dansk 6865 Manx 7186 Tibetan 6679 Deutsch 6869 Maori 7773 Tigrinya 8473 Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian 7779 Tswana 8478 Estonian 6984 Mongolian 7778 Türkçe 8482 Euskara 6985 Nauru 7865 Turkmen 8475 Faroese 7079 Ndebele, North 7868 Uighur 8571 Français 7082 Ndebele, South 7882 Ukrainian 8575 Frysk 7089 Ndonga 7871 Urdu 8582 Fijian 7074 Nederlands 7876 Uzbek 8590 Gaelic; Scottish Gaelic 7168 Nepali 7869 Vietnamese 8673 Gallegan 7176 Norsk					0	
Deutsch	*					
Dzongkha 6890 Marathi 7782 Tonga (Tonga Islands) 8479 English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian 7779 Tsvana 8478 Estonian 6984 Mongolian 7778 Türkçe 8482 Euskara 6985 Nauru 7865 Turkmen 8475 Euskara 6985 Nauru 7865 Turkmen 8475 Faroese 7079 Ndebele, North 7886 Twi 8487 Faroese 7079 Ndebele, South 7882 Ukrainian 8575 Frysk 7082 Ndebele, South 7882 Ukrainian 8575 Frysk 7089 Ndonga 7871 Urdu 8582 Fijian 7074 Nederlands 7876 Uzbek 8590 Gallegan 7176 Norsk 7879 Volapuk 8673 Gallegan 7176 Norsk 7						
English 6978 Marshallese 7772 Tsonga 8483 Esperanto 6979 Moldavian 7779 Tswana 8478 Estonian 6984 Mongolian 7778 Türkçe 8482 Euskara 6985 Nauru 7865 Turkmen 8475 6976 Navaho; Navajo 7886 Twi 8487 Faroese 7079 Ndebele, North 7868 Uighur 8571 Français 7082 Ndebele, South 7882 Ukrainian 8575 Frysk 7089 Ndonga 7871 Urdu 8582 Fijian 7074 Nederlands 7876 Uzbek 8590 Gaelic; Scottish Gaelic 7168 Nepali 7869 Vietnamese 8673 Gallegan 7176 Norsk 7879 Volapuk 8679 Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele						
Esperanto	0					
Estonian	0				0	
Euskara 6985 6976 Nauru Navaho; Navajo 7865 7886 Turkmen 8475 Twi Faroese 7079 Ndebele, North 7868 Uighur 8571 Français 7082 Ndebele, South 7882 Ukrainian 8575 Frysk 7089 Ndonga 7871 Urdu 8582 Fijian 7074 Nederlands 7876 Uzbek 8590 Gaelic; Scottish Gaelic 7168 Nepali 7869 Vietnamese 8673 Gallegan 7176 Norsk 7879 Volapuk 8679 Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973	•					
Rayaho; Navajo Raya					3 "	
Faroese 7079	Euskara					
Français 7082 Ndebele, South 7882 Ukrainian 8575 Frysk 7089 Ndonga 7871 Urdu 8582 Fijian 7074 Nederlands 7876 Uzbek 8590 Gaelic; Scottish Gaelic 7168 Nepali 7869 Vietnamese 8673 Gallegan 7176 Norsk 7879 Volapuk 8679 Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279	-					
Frysk 7089 Ndonga 7871 Urdu 8582 Fijian 7074 Nederlands 7876 Uzbek 8590 Gaelic; Scottish Gaelic 7168 Nepali 7869 Vietnamese 8673 Gallegan 7176 Norsk 7879 Volapuk 8679 Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hiri Motu 7279 Ossetian; Ossetic 7983 Yoruba 9085 Hrwatski 6779 Pali 8073 Iddo 7379 Panjabi 8065					0	
Fijian 7074 Nederlands 7876 Uzbek 8590 Gaelic; Scottish Gaelic 7168 Nepali 7869 Vietnamese 8673 Gallegan 7176 Norsk 7879 Volapuk 8679 Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitari; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Pali 8073 Ido 7379 Panjabi 8065 Interlingua (International) 7365 Persian 7065	,					
Gaelic; Scottish Gaelic 7168 Nepali 7869 Vietnamese 8673 Gallegan 7176 Norsk 7879 Volapuk 8679 Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hirid 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Pali 8073 Ido 7379 Pali 8073 106 106 7379 Panjabi 8065 Interlingua (International) 7365 Polski 8076 1065 1						
Gallegan 7176 Norsk 7879 Volapuk 8679 Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Hrwatski 6779 Pali 8073 Ido 7379 Panjabi 8065 Interlingua (International) 7365 Persian 7065 Interlingue 7365 Polski 8076 8076 8076 8076 8076 8076 8076 8076 8076 8076 807						
Georgian 7565 Northern Sami 8369 Walloon 8765 Gikuyu; Kikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Hrwatski 6779 Pali 8073 Ido 7379 Panjabi 8065 Interlingua (International) 7365 Persian 7065 Interlingue 7365 Polski 8076						
Gikuyu 7573 North Ndebele 7868 Welsh 6789 Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Plai 8073 Ido 7379 Palia 8073 8065 Interlingua (International) 7365 Persian 7065 Interlingue 7365 Polski 8076	O .					
Guarani 7178 Norwegian Nynorsk; 7878 Wolof 8779 Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Yoruba 9085 Hrwatski 6779 Pali 8073 8065 Interlingua (International)7365 Persian 7065 Interlingue 7365 Polski 8076 8076	•					
Gujarati 7185 Occitan; Provencal 7967 Xhosa 8872 Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Hrwatski 6779 Pali 8073 Ido 7379 Panjabi 8065 Forsian 7065 Interlingue 7365 Polski 8076	, ,					
Hausa 7265 Old Bulgarian; Old Slavonic 6785 Yiddish 8973 Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Pali 8073 Ido 7379 Panjabi 8065 8065 Interlingua (International) 7365 Persian 7065 Interlingue 7365 Polski 8076						
Herero 7290 Oriya 7982 Yoruba 8979 Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Province 7983 Hrwatski 6779 Pali 8073 Pali Pali 8073 Ido 7379 Panjabi 8065 Persian 7065 Polski 8076 Interlingue 7365 Polski 8076 Polski 8076						
Hindi 7273 Oromo 7977 Zulu 9085 Hiri Motu 7279 Ossetian; Ossetic 7983 Pali 8073 Pali 8073 Pali						
Hiri Motu 7279 Ossetian; Ossetic 7983 Hrwatski 6779 Pali 8073 Ido 7379 Panjabi 8065 Interlingua (International)/7365 Persian 7065 Interlingue 7365 Polski 8076						
Hrwatski 6779 Pali 8073 Ido 7379 Panjabi 8065 Interlingua (International)/7365 Persian 7065 Interlingue 7365 Polski 8076					Zulu	9085
Ido 7379 Panjabi 8065 Interlingua (International)/7365 Persian 7065 Interlingue 7365 Polski 8076						
Interlingua (International)7365 Persian 7065 Interlingue 7365 Polski 8076						
Interlingue 7365 Polski 8076						
	Interlingua (International)7365	Persian			
Inuktitut 7385 Português 8084			Polski			
	Inuktitut	7385	Português	8084		





Especificações sujeitas a alteração sem aviso prévio.

Marcas comerciais são propriedade de Koninklijke Philips Electronics N.V. ou de seus respectivos proprietários.

www.phillips.com

© 2012 Koninklijke Philips Electronics N.V. All rights reserved. sgpjp_1206/78_v1