Diagonal Die-cut 5.0x5.0 mm
on release liner. So that this
triangular portion is not sticking on
the panel. The small triangular release liner
still remain on the sticker with the label is pasted on
the panel. - Ease for removing the sticker from the panel.

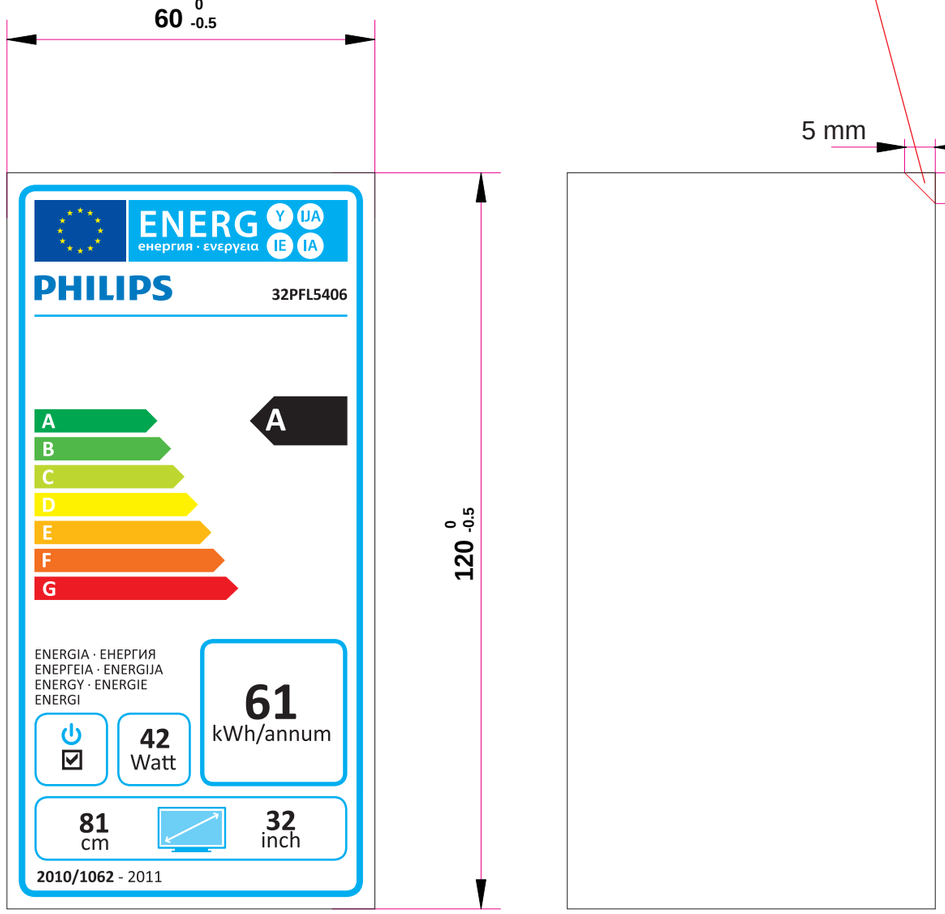

FRONT SIDE

REAR SIDE

Printing Color Please refer to the Official Journal of the Europe Union and Commission Delegated Regulation (EU) No 1062/2010 of 28 September 2010 supplementing Directive 2010/30/EU of the European Parliament and of the Council with regard to energy labeling of televisions, **L314/64.**

COMPLY WITH
RoHS

產 品 說 明 書 SPECIFICATIONS

品 名 Article Name	特多龍商標紙 (白色, 可移除性) Polyster Film Label (White, removable)	構造示意 Construction	Printing / Base Material / Glue / Liner

Ⅰ.產品物性（The Properties of Product, ELW$^{50}_{ERT50R3}$ ）

1 初 期 力	Tack(PSTC－6)	5 ↑	cm	2 粘 著 力	Adhesion	120 ↓	g/l″
3 保 持 力	Cohesion forces	***	hrs/1″ ×1″	4 剝 離 力	Release force	1~12	g/l″
5 膠 厚	Coating thickness	15±3	μ	6 上 膠 量	Dry coating weight	18±4	g/m^2
7 殘餘溶劑	Solvent residual	1.0 ↓	%	8 耐 候 性	Weather resistance		
9 再 貼 性	Re-Adhesion	OK		10 適用溫度	Temp range	-10~100	℃
11 耐 溶 劑	Solvent resistance	OK		12 膠 類	Adhesive base	Acrylic Adhesive	

Ⅱ．原物料物性（The Properties of Raw Materials）測試條件：23℃； 65%RH

中 文	English Name	面 層（Surface Material）	底 層（Liner）
1 品 名	Article name	Polyester Film	Polyester Film
2 基 重	Basic Weight	70±5g/m^2	70±5g/m^2
3 厚 度	Thickness	50±5μ	50±5μ
4 顏 色	Color	White	Transparent
5 平滑度	Smoothness	Good	Good
6 印刷性	Printability	Good	Good
7 抗水度	Moisture resistance	Good	Good
8 斬 性	Die cutting	Good	Good

MODEL: 32PFL5406H		PROE 3D:	PROE 2D:
UNIT mm	TOLERANCES UNLESS OTHERWISE STATED DIMENTIONS ANGLE +/- 0.2 +/- 0.5	MATERIAL	
SCALE 1.000	3rd PROJ.	TREATMENT	Printing Color: CMKY color
LABEL_ENERGY_PANEL		P40G0002813H6	A --------
DRAWN GARY LAI	DATE 2011-04-01	TPV Technology Ltd.	110 / 1-1 / A3
CHECK JS LEU	DATE 2011-04-01		CL