

Philips  
LCD monitor

165 cm (65")

Multi-touch  
Full HD

BDL6545AT



# Open up a new era of interaction

with the multi-touch LCD display

Take audience participation to a whole new level with the 165 cm (65") full HD LCD display. With your own touch applications, the sky's the limit!

#### Lower total cost of ownership

- SmartPower for energy saving
- Advanced anti-image sticking function

#### Operational flexibility

- Open Pluggable Specification Slot
- Optical touch technology for advanced user interaction
- Designed for 24/7 operation
- Smart insert in the back cover to place a small PC
- Remote Management and Configuration via RS232

#### Sustainable and safe

- Temperature sensor measures the health condition
- Complies with RoHS standards of care for the environment

# PHILIPS

LCD monitor  
165 cm (65") Multi-touch, Full HD

BDL6545AT/00

# Highlights


## Optical multi-touch

The sensors on the edge of the screen give you perfect clarity whilst at the same time offering multi-touch interaction, opening up all kinds of possibilities for new interactive applications.

## OPS Slot

Developed for the Digital Signage market, the Open Pluggable Specification (OPS) slot is designed to make changing or upgrading your media player mere child's play. Simply plug your media player in to the display and you're ready. No matter whether you have an entry level, mid-range or high-end media player, OPS is fully compatible bringing you a lower TCO over the longer term.

## SmartPower




The backlight intensity can be controlled and pre-set by the system to reduce the power consumption by up to 50%, which saves substantially on energy costs.

## Smart Insert

Professional PCs are part of most public signage installations. Quite often they increase the overall depth of the display and cause a lot of cable clutter. So we have designed this display with Smart insert in the back cover, which is ideal for the integration of a professional small form factor PC. On top of that, the cable management system offers a great solution to keep your cables neat and professional-looking.

## Designed for 24/7 operation



Because business never sleeps, our signage displays are designed for 24/7 use. Taking advantage of superior components to ensure a higher level of quality, you can count on this range of models for complete around-the-clock reliability.

## Remote Management: RS232

Remote Management allows the user to control and adjust the displays remotely via the RS232 protocol. Using CEC commands, you are able to have full control over all the displays in your signage network at any time.

## Temperature sensor


This public display contains a temperature sensor to monitor the internal health condition. If the internal temperature exceeds the pre-set threshold, two internal fans will be automatically activated to cool down the display to normal conditions.

## Advanced anti-image sticking

Static images left on-screen for extended periods of time may leave a "ghost image" or image sticking effect on LCD displays. Although image sticking on LCD displays is not permanent, you want to prevent this happening, especially in locations where content is shown 24/7.

## Compliant with RoHS standards

Philips designs and produces display products in compliance with strict Restriction of Hazardous Substances (RoHS) standards that restrict lead and other toxic substances that can harm the environment.



# Specifications

## Picture/Display

- Diagonal screen size (metric): 165.1 cm
- Diagonal screen size (inch): 65 inch
- Aspect ratio: 16:9
- Panel resolution: 1920 x 1080p
- Pixel pitch: 0.744 x 0.744 mm
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 500 cd/m<sup>2</sup>
- Display colours: 1.07 billion
- Contrast ratio (typical): 5000:1
- Response time (typical): 5 ms
- Viewing angle (horizontal): 178 degree
- Viewing angle (vertical): 178 degree
- Picture enhancement: 3/2 - 2/2 motion pull down, Motion compens. deinterlacing, Progressive scan, Dynamic contrast enhancement
- Display screen type: LCD Full HD W-UXGA Act. matrix

## Connectivity

- PC: VGA-in D-Sub 15HD, VGA-out D-Sub 15HD, RS232 D-Sub9, RS232 D-sub9 output, USB B-Type
- AV input: Composite (BNC) x 1, S-video x 1, DVI-D x 1, Component RCA
- AV output: Composite (BNC) x 1, Audio (L/R) x 2, Audio (L/R) x 1
- Other connections: OPS, HDMI

## Convenience

- Placement: Landscape
- Picture in picture: PIP
- Tiled Matrix: Up to 5 x 5
- Keyboard control: Hidden, Lockable
- Remote control signal: Lockable
- Signal loop through: RS232, VGA
- Ease of installation: AC Out, Carrying Handles, Smart Insert
- Energy-saving functions: Ambient light sensor, Smart Power
- Network controllable: RS232
- Packaging: Reusable box

## Sound

- Built-in speakers: 2 x 10 W (8 Ohm)

## Power

- Consumption (On mode): Typ. 309 W
- Standby power consumption: <1 W

## Supported Display Resolution

- Computer formats: 640 x 480, 60, 67, 72, 75 Hz, 800 x 600, 56, 60, 72, 75 Hz, 1024 x 768, 60 Hz, 1280 x 768, 60 Hz, 1280 x 800, 60 Hz, 1280 x 1024, 60 Hz, 1360 x 768, 60 Hz, 1366 x 768, 60 Hz, 1440 x 900, 60 Hz, 1600 x 1200, 60 Hz, 1920 x 1080, 60 Hz, 1920 x 1200, 60 Hz
- Video formats: 480i, 60 Hz, 480p, 60 Hz, 576p, 50 Hz, 576i, 50 Hz, 720p, 50, 60 Hz, 1080i, 50, 60 Hz, 1080p, 50, 60 Hz
- MAC 640 x 480: 60 Hz
- MAC 832 x 624: 60 Hz
- MAC 1152 x 870: 60 Hz

## Dimensions

- Bezel thickness: 45 mm r/l, 42 mm top, 39 mm bottom
- Set Width: 1522 mm
- Product weight: 71.6 kg
- Set Height: 889 mm
- Set Depth: 124 mm
- Set Width (inch): 59.9 inch
- Set Height (inch): 35.0 inch
- Wall Mount: 400 x 400 mm, 400 x 200 mm
- Set Depth (inch): 4.9 inch
- Product weight (lb): 157.5 lb

## Product dimensions

- Width: 152.2 cm
- Width: 59.9 inch
- Height: 88.9 cm
- Height: 35.0 inch
- Depth: 12.3 cm
- Depth: 4.8 inch
- Weight: 71.6 kg
- Weight: 157.849 lb

## Technical specifications

- Touchpoints: Optical Sensing Touch s

## Operating conditions

- Temperature range (operation): 0 - 40 °C
- MTBF: 50,000 hour(s)
- Relative humidity: 5 - 90 %

## Accessories

- Included accessories: Remote Control, Batteries for remote control, AC Power Cord, VGA cable, User manual on CD-ROM, Quick start guide


- Optional accessories: Fixed wall mount, Flexible wall mount, Ceiling mount
- Stand: BM06511

## Miscellaneous

- On-Screen Display Languages: English, French, German, Italian, Polish, Turkish, Russian, Simplified Chinese
- Warranty: Europe/North America: 3 years
- Regulatory approvals: CE, FCC, Class B, CCC, RoHS

## Packaging dimensions

- EAN: 87 12581 60484 4
- Number of products included: 1
- Packaging type: Carton

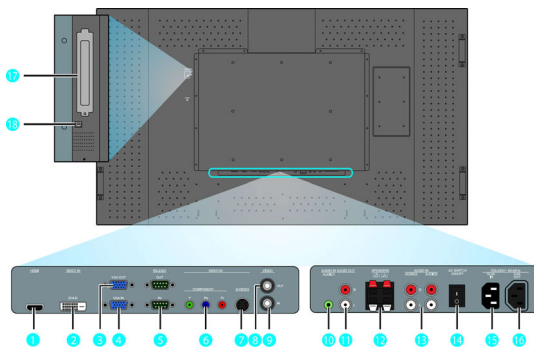

Issue date 2024-03-24

Version: 7.3.3

EAN: 87 12581 60484 4

© 2024 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)