



RS232 Cable

RS232 Daisy Chain Cable



IR Sensor Cable




USB Cover




x1

* Differences according to regions.




Display design and accessories may differ from those illustrated above.




1

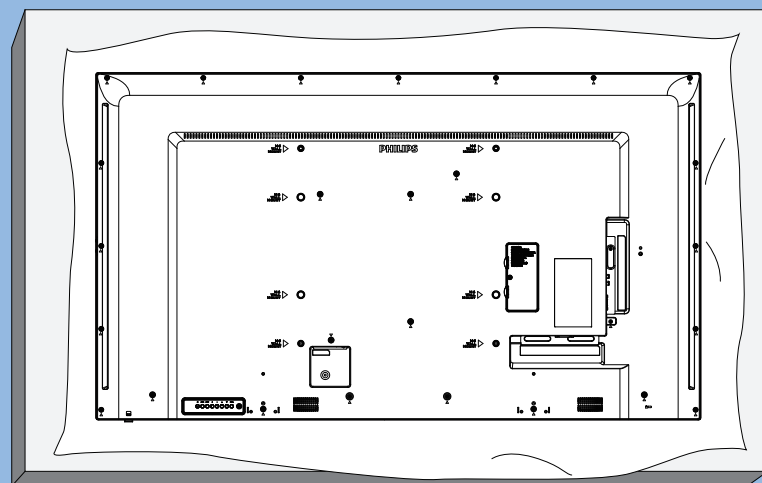

2

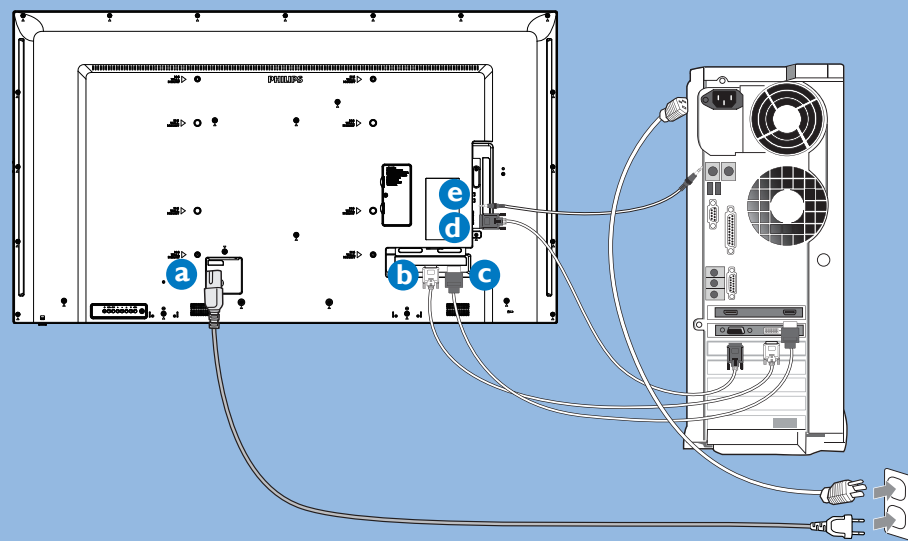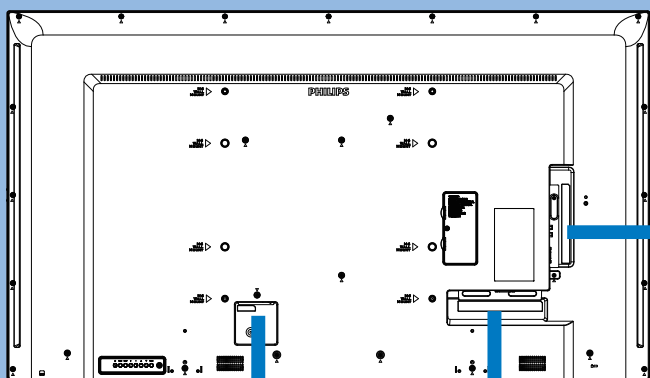


AC IN



DVI



HDMI




VGA



Audio



RS232 IN RS232 OUT RJ45 IR-IN IR-OUT DVI IN HDMI 1 IN HDMI 2 IN




VGA IN




PC LINE IN



AUDIO OUT



USB 2.0







USB 3.0



MICRO SD


3

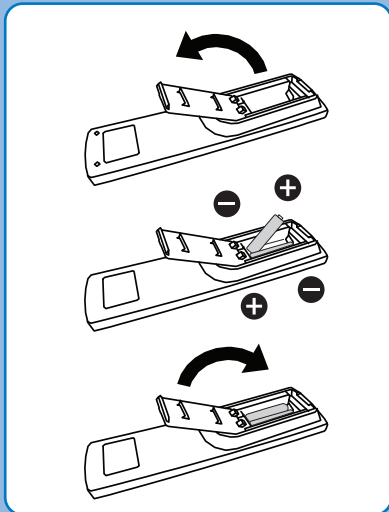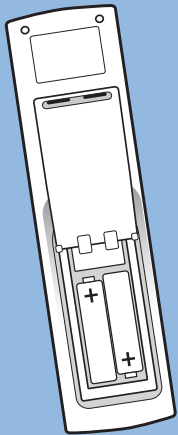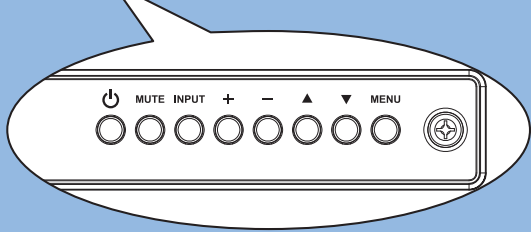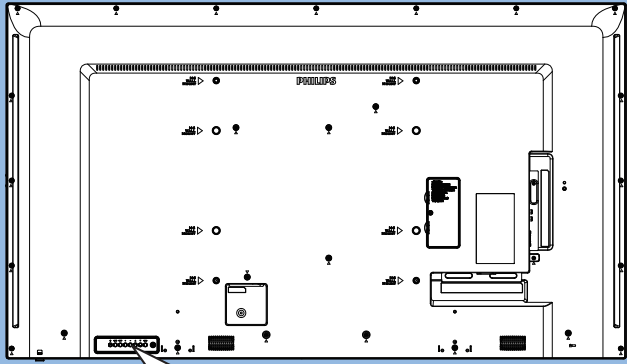

Please check out the website below for more product information.
www.philips.com/signagesolutions-support




55BDL3050Q



Quick Start

PHILIPS

4

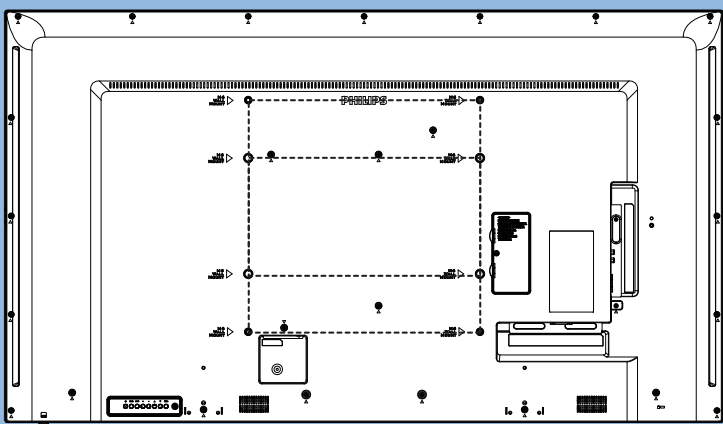

⚙ M6 * (10+X) mm
 (X=Thickness of Wall mount BKT)

55BDL3050Q: 200mmx400mm, 400mmx400mm



© 2017 Koninklijke Philips N.V. All rights reserved.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license from Koninklijke Philips N.V.

Specifications are subject to change without notice.

Version:V1.10 2018-05-22



Q41G55M181337B