Power Cord   RS232 Cable   RS232 Daisy Chain Cable

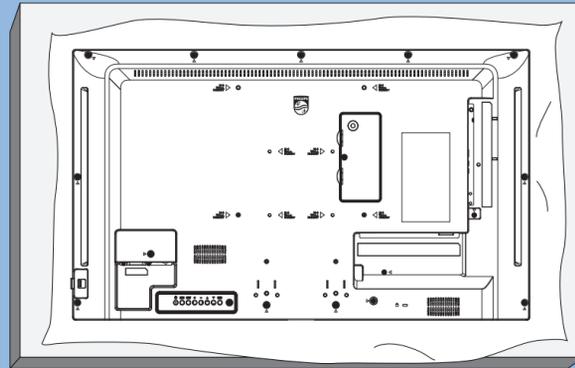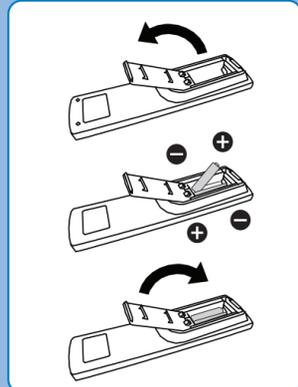IR Sensor Cable   Philips logo plate   USB Cover x 1
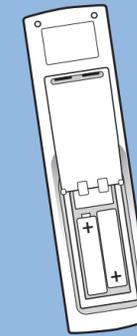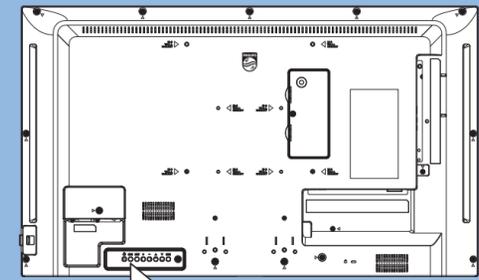
* Differences according to regions.
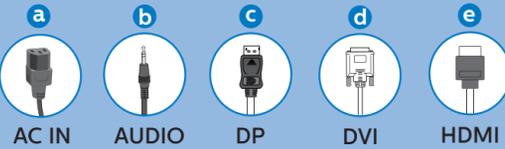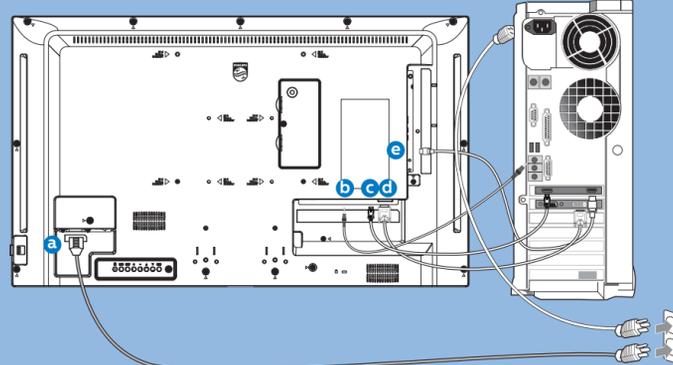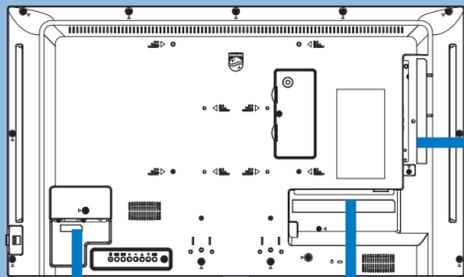Display design and accessories may differ from those illustrated above.

X2

1

X2

2

ⓊMUTE INPUT ＋ － ▲ ▼ MENU

3

~

a   b   c   d   e

a	b	c	d	e
AC IN	AUDIO	DP	DVI	HDMI

AUDIO OUT   PC LINE IN   LAN   HDMI OUT   DP IN   DP OUT   DVI-I IN

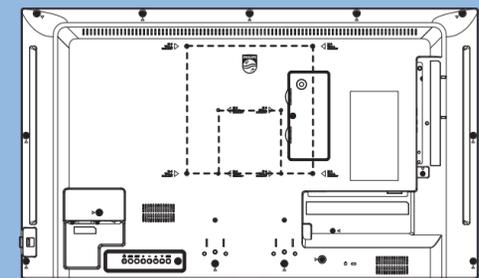HDMI1 IN   HDMI2 IN   IR-IN   IR-OUT   MICRO SD   USB2.0   USB2.0   RS232 IN   RS232 OUT
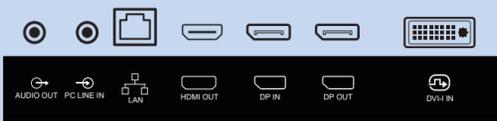
4

X2

M4 * (10+X) mm
(X=Thickness of Wall mount BKT)

32BDL4550D: 100mmx100mm
            200mmx200mm

5

90°

① ② ③

a 6.5mm 215.3mm

b
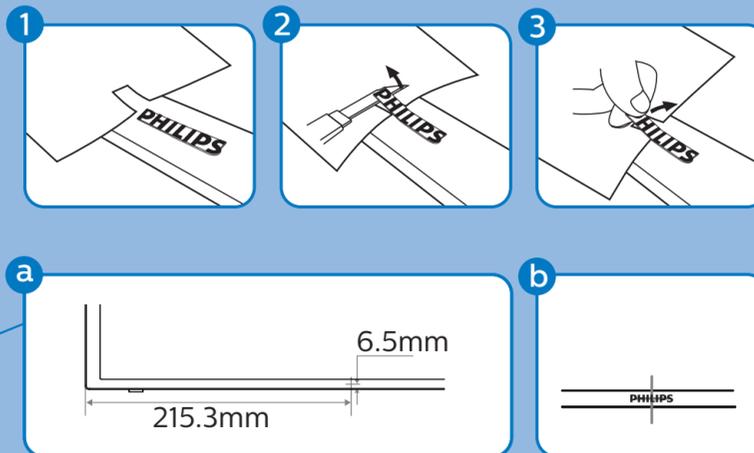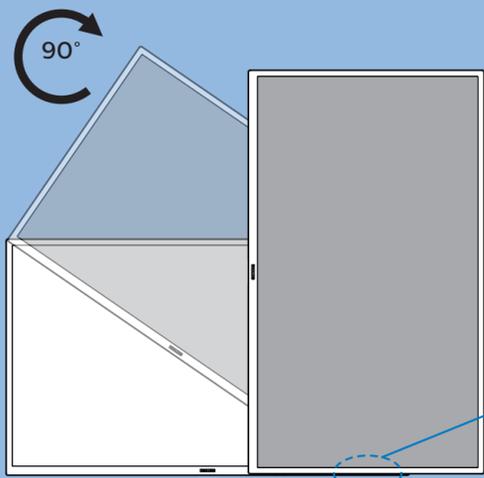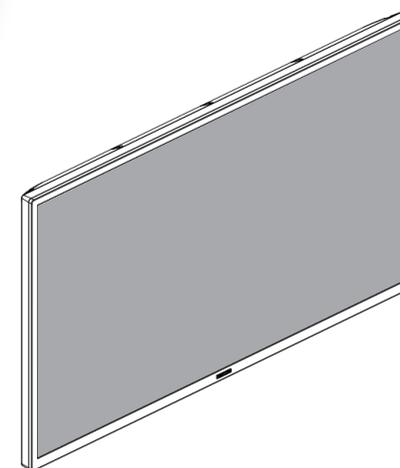
Quick
Start

Please check out the website below for more product information.
www.philips.com/signagesolutions-support

PHILIPS

Version: V1.00   2020-12-27

Q41G32M181387A