

Philips
plasma monitor

107cm (42")
WXGA

BDH4222V



High resolution versatile display solution

107 cm (42") Wide WXGA Plasma Monitor

This large WXGA monitor is a real eye catcher for indoor public areas thanks to its size and outstanding video performance. Razor sharp display of graphics and pc-presentations make this monitor also a welcome guest in boardrooms.

Operational flexibility

- Remote Management and Configuration via RS232
- Multiple PC input formats up to WXGA
- Wide choice of analog and digital connectivity
- Quiet and reliable fanless operation
- VGA Loopthrough
- Portrait mode operability

Optimized for public viewing

- 3D combfilter separates colors for a razor-sharp image
- HDTV Signal Compatible to display HDTV content
- 3:2 Pulldown eliminates artefacts when watching movies
- Motion Adaptive De-interlacing for razor sharp images
- PiP allows watching a second source simultaneously

Lower total cost of ownership

- Long expected panel lifetime of over 60.000 hours

PHILIPS

Highlights

Remote Management:: RS232

Remote Management allows the user to control and adjust the displays remotely via the RS232 protocol. Using CEC commands, you are able to have full control over all the displays in your signage network at any time.

Multiple PC input formats

The product supports PC compatibility for VGA, SVGA, XGA and WXGA. A universal public display solution requires versatile PC input support.

Wide choice of connectivity

Versatile public display solutions require versatile analogue and digital connectivity.

VGA Loophrough

Connect multiple displays to create a video wall of up to 150 displays via a VGA daisy chain thus enhancing your visual experience. With no additional hardware required, they are as simple to install as they are captivating to your audience.

Portrait mounting possible

This display is also able to be safely and reliably mounted in portrait position.

3D Combfilter

The 3D comb filter separates brightness and color signals better in 3D domain to eliminate cross-color, cross-luminance and dot-crawl distortion - all of which detract from your viewing pleasure. The 3D digital comb filter performs field-by-field comparisons of the television image to accurately separate the color from the black-and-white information and remove both horizontally and vertically hanging dots, as well as dot crawl. The result is a razor sharp image.

HDTV Signal Compatible

This display is capable of accepting 1080i and 720p HDTV signals via an external HDTV decoder with RGB or Components Video outputs

3:2 Pulldown

3:2 Pulldown totally eliminates the unwanted artefacts that distort your picture viewing

when watching movies. With these artefacts gone, you will enjoy the movie the way it is meant to be.

Motion adaptive de-interlacing

This smart de-interlacing algorithm is able to detect the type of video source (such as Still Picture, Motion Picture or Film) and automatically optimize the de-interlacing process with Spatial, Temporal or Film mode de-interlacing. The result is that it delivers razor sharp and stable images every time.

Picture In Picture (PIP)

Provides the ability to watch simultaneously two different sources, either two video sources or a combination with data/graphics

Long expected panel lifetime

In public display applications 24/7 operation is often required. Even after 60000 hours of operation the brightness level of the display will be at least 50% of the initial value.



Specifications

Picture/Display

- Panel Size: 42" / 106.7cm
- Aspect ratio: 16:9
- Panel resolution: 1024 x 1024i
- Pixel pitch: 0.9 x 0.51 mm
- Brightness: 1100 cd/m²
- Contrast ratio (typical): 1000:1
- Display colors: 16.7 Million colors
- Viewing angle: 160° (H) / 160° (V)
- Effective viewing area: 921.6 x 522.24mm
- Horizontal Scanning Frequency: 15 - 91 kHz
- Vertical Scanning Frequency: 50 - 85 Hz
- Picture enhancement: 3D Combfilter, 3/2 - 2/2 motion pull down, Motion adaptive de-interlacing, Picture in Picture

Supported Display Resolution

• Computer formats

Resolution	Refresh rate
1280 x 1024	60, 75, 85Hz
1280 x 960	60, 85Hz
1024 x 768	60, 70, 75, 85Hz
800 x 600	56, 60, 72, 75, 85Hz
720 x 400	70Hz
640 x 480	60, 72, 75, 85Hz
640 x 480	60Hz

- WVGA 852 x 480: 60 Hz
- VGA 640 x 350: 70 Hz
- MAC 1152 x 870: 75 Hz
- MAC 832 x 624: 75 Hz
- MAC 640 x 480: 67 Hz

• Video formats

Resolution	Refresh rate
480p	60Hz
576p	50Hz
1080i	50, 60Hz
576i	50Hz
480i	60Hz
720p	50, 60Hz

Connectivity

- PC: DVI-D x1, RS232 D-Sub9, VGA-in D-Sub 15HD, VGA-out D-Sub 15HD
- AV input: Component (YPbPr) 2x, S-video x1, Composite (CVBS) x1, Audio (L/R) for YPbPr 2x
- Audio cinch out: Analog audio output L/R

- Audio input for data: Audio Left/Right (RCA) 2x
- Audio input for PC: Audio Left/Right (RCA) 2x
- Audio output: Subwoofer Out, Stereo Audio (3.5 mm jack) 1x

Convenience

- Picture in Picture: Double window, Picture in Picture All Inputs
- Network controllable: RS232
- User convenience: On-screen Display
- OSD Languages: English, French, Spanish
- Monitor Controls: Power On/Off, Left/Right, Up/Down, Menu (OK), Volume control, Source Select
- Screen saving functions: Full white, pixel shift
- Built-in Audio: Built-in amplifier and 5 Watts RMSx2 stereo speakers
- SRS sound processing
- Regulatory approvals: FCC-B, UL, CSA, CE Mark

Power

- Consumption (On mode): 390 Watts (color bar)
- Power supply: 100-240VAC, 50/60Hz
- Sleep Mode: 10 Watts Max.

Dimensions


- Dimensions (with base) (W x H x D): 1081 x 722 x 220 mm
- Dimensions (without base) (W x H x D): 1081 x 677 x 95 mm
- Weight: 31.2 kg
- Temperature range (operation): 0°C to 40°C
- Temperature range (storage): -5°C to +45°C
- Relative humidity: 20% - 80%
- Lifetime to 50% brightness: 80000 hr

Accessories

- Included accessories: AC Power Cord, Battery, Remote Control, Table top stand, VGA cable
- User Guide on CD-ROM
- User Manual: English, Spanish
- Optional accessories: Ceiling mount, Flexible wall mount, Fixed wall mount

Miscellaneous

- Bezel: Silver

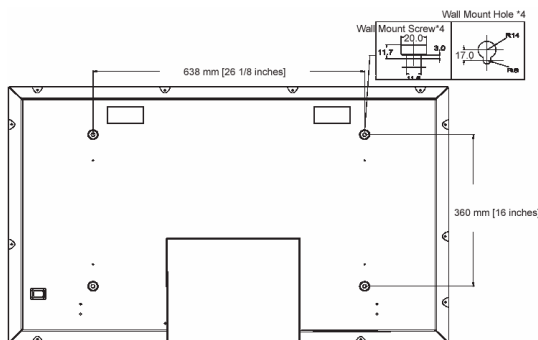

Issue date 2022-04-21

Version: 2.0.3

12 NC: 8639 000 16417
EAN: 87 10895 90711 8

© 2022 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com