



Philips  
LCD monitor

56 cm/22" w E-line  
1920x1080 Full HD

220E1SB1

## Full HD 16:9 display with Glossy design

Enjoy more with this Vista-ready Full HD 1080p quality display! The 220E1 comes with attractive Glossy finish and easy to use features - All in a budget friendly package.

### **Great picture quality**

- Full HD LCD display, 1920x1080p resolution
- 5ms fast response time
- SmartContrast 25000:1 for incredible rich black details

### **Design that complements any interior**

- Glossy finish to enhance your decor

### **Great convenience**

- Easy picture format control switching in wide and 4:3 format

# PHILIPS

# Highlights

## Full HD 1920x1080p LCD display

Enjoy crisp and crystal clear picture quality to give your audience a truly memorable visual experience. Your viewers will be treated to unsurpassed video, with an amazing color gamut and the sharpest pictures around.

## 5ms on/off response time


On-Off response time is the period required for a liquid crystal cell to go from active (black) to inactive (white) and back to active (black) again. It is measured in milliseconds. Faster is better: Lower response time means faster transitions and, therefore, results in fewer visible image artifacts in the display of transition of texts and graphics. On-Off response time is a more important measure in the display of business content like documents, graphs and photos.

## SmartContrast ratio 25000:1



You want the LCD flat display with the highest contrast and most vibrant images. Philips advanced video processing combined with unique extreme dimming and backlight boosting technology results in vibrant images. SmartContrast will increase the contrast with excellent blacklevel and accurate rendition of dark shades and colors. It gives a bright, lifelike picture with high contrast and vibrant colors.


## Easy picture format control

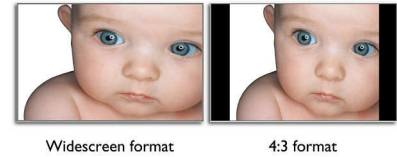

Philips easy picture format control on OSD is to switch from the 4:3 aspect ratio to the widescreen mode and back again to match the display's aspect ratio with your content for working with wide documents without scrolling or viewing widescreen media in the widescreen mode and distortion-free, native mode display of 4:3 ratio content.

## Glossy finish

An attractive, elegantly finished glossy finish that fits in with and complements your decor.



# Specifications

## Connectivity

- Signal Input: VGA (Analog)
- Sync Input: Composite Sync, Separate Sync, Sync on Green

## Picture/Display

- Panel Size: 21.5 inch / 54.61 cm
- Aspect ratio: 16:9
- LCD panel type: TFT-LCD
- Pixel pitch: 0.248 x 0.248 mm
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 250 cd/m<sup>2</sup>
- Display colors: 16.7 M
- SmartContrast: 25000:1
- Response time (typical): 5 ms
- Viewing angle: 170° (H) / 160° (V), @ C/R &gt; 10
- Scanning Frequency: 30 - 83 kHz (H) / 56 - 76 Hz (V)
- sRGB

## Convenience

- Plug & Play Compatibility: DDC/CI, Windows 7/ Vista/XP/2000/98, sRGB
- User convenience: Brightness, Menu, Auto, Power On/Off
- OSD Languages: English, French, German, Italian, Russian, Simplified Chinese, Spanish, Portuguese, Turkish
- Other convenience: VESA mount (100x100mm), Kensington lock

## Stand

- Tilt: -5/20 degree

## Power

- Power supply: Built-in, 100-240VAC, 50/60Hz
- Off mode: < 0.5 W
- On mode: < 20.5W (EnergyStar 5.0 test method)
- Power LED indicator: Operation - green, Stand by/ sleep - Amber

## Dimensions

- Product with stand (mm): 512 x 374 x 205 mm
- Packaging in mm (WxHxD): 570 x 453 x 140 mm
- Product without stand (mm): 453 x 570 x 140 mm

## Weight

- Product with packaging (kg): 6.28 kg
- Product with stand (kg): 4.4 kg
- Product without stand (kg): 4.04 kg

## Operating conditions

- Temperature range (operation): 0 - 40 °C
- MTBF: 50,000 hour(s)
- Relative humidity: 20 - 80 %
- Temperature range (storage): -20 - 60 °C

## Sustainability

- Environmental and energy: EPEAT Silver, RoHS, EnergyStar 5.0

## Compliance and standards

- Regulatory Approvals: CE Mark, FCC, Class B, UL/cUL

## Cabinet

- Color: Black
- Finish: Glossy

