


RS232 Cable RS232 Daisy Chain Cable

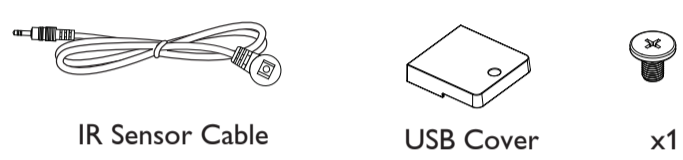


IR Sensor Cable USB Cover x1

* Differences according to regions.







Display design and accessories may differ from those illustrated above.







1

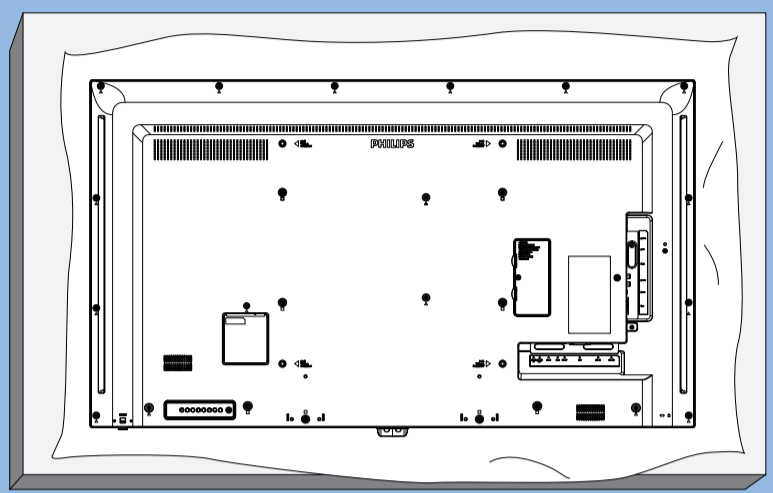

2

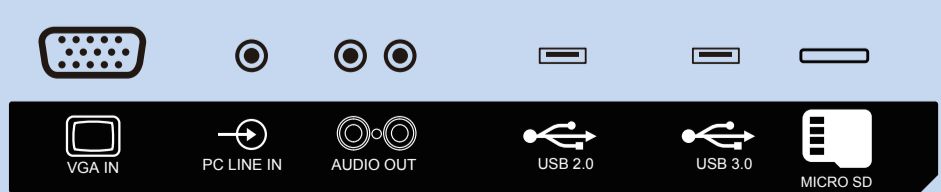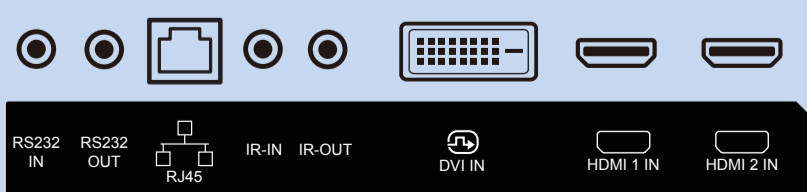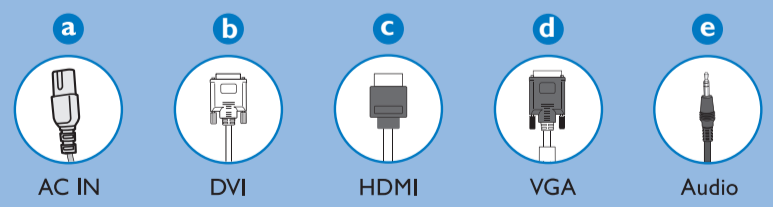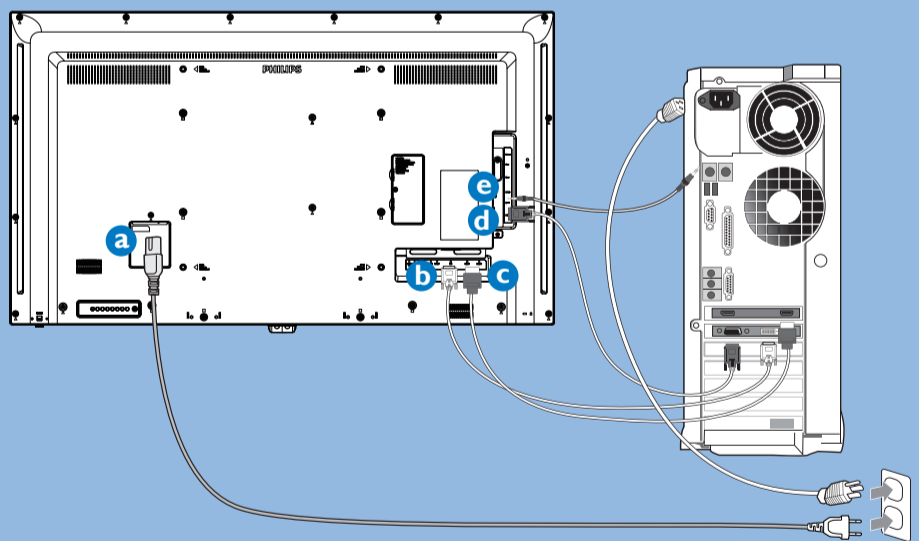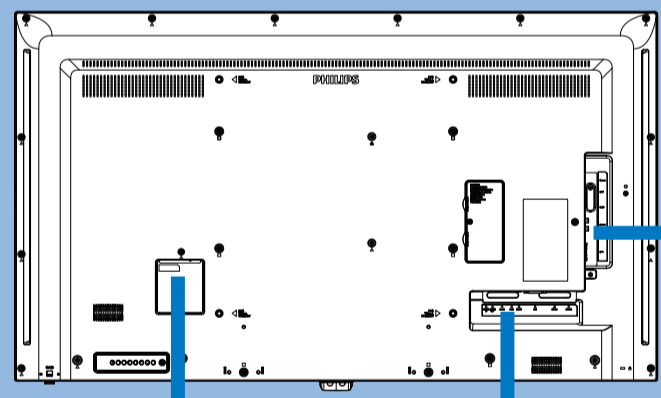

3

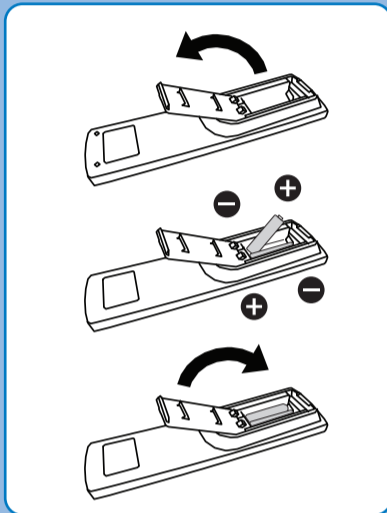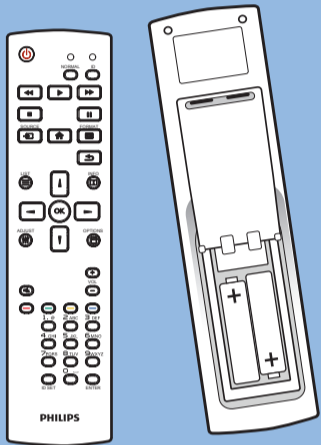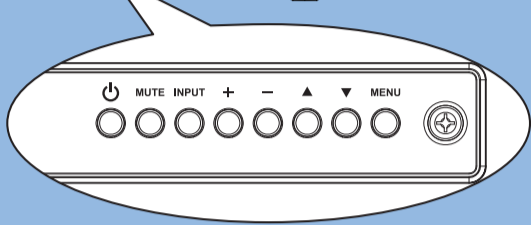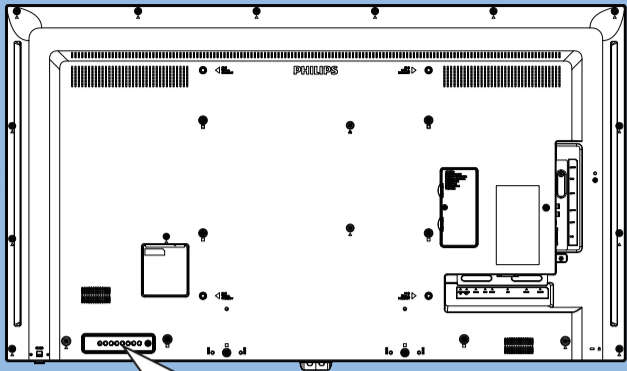

Please check out the website below for more product information.
www.philips.com/signagesolutions-support




49BDL3050Q



Quick Start

PHILIPS

4

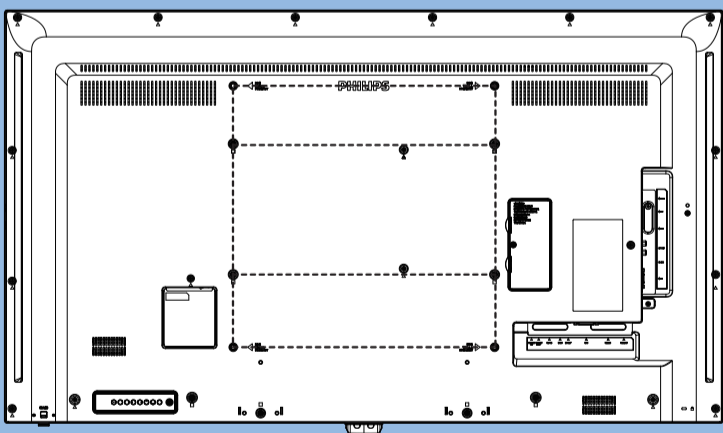

M6 * (10+X) mm
(X=Thickness of Wall mount BKT)

49BDL3050Q: 200mmx400mm, 400mmx400mm



© 2017 Koninklijke Philips N.V. All rights reserved.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license from Koninklijke Philips N.V.

Specifications are subject to change without notice.

Version:V1.00 2017-09-19



Q41G49M181312A