



#### C-Line Display

- 65"
- Powered by Android
- 350cd/m<sup>2</sup>

65BDL6051C/00

## Interactive meeting display

high-end capacitive multi-touch technology

Maximise engagement and inspire collaboration with an interactive Philips C-Line display. These Android powered displays are made to withstand heavy daily usage, and feature up to 10 touchpoints, edge-to-edge glass and flush design.

### Benefits

#### Interactive and collaborative

- Wireless screen sharing & advanced collaboration
- HID Capacitive Touch with USB Plug & Play
- Operate, monitor and maintain with CMND & Control

#### Smart and powerful

- Whiteboard mode built-in
- Fast and easy video conferencing

- Crestron Connected certified
- Anti-glare toughened glass
- Install and use your preferred apps and features
- OPS slot allows for PC embedding without cabling
- Android SoC processor. Native and web apps

# PHILIPS

Features


Wireless screen sharing

Display four feeds on the one screen. Wireless screen sharing allows you to connect multiple devices at the same time for quick content switching when you need it. Use your existing Wi-Fi network to instantly and securely connect devices, or use our optional HDMI interact dongles to cast directly to the screen without needing to connect to your secured/protected network.

HID Capacitive Touch

Capacitive Touch gives you the cutting edge appearance of edge to edge glass with a bezel width of just 1.5 mm! Create a memorable interactive experience with up to 10 touchpoints at the same time. Perfect for collaborative and competitive applications, this display connects your audience with any content - making it ideal for education, public venues, corporate, hospitality, and retail settings.

CMND & Control

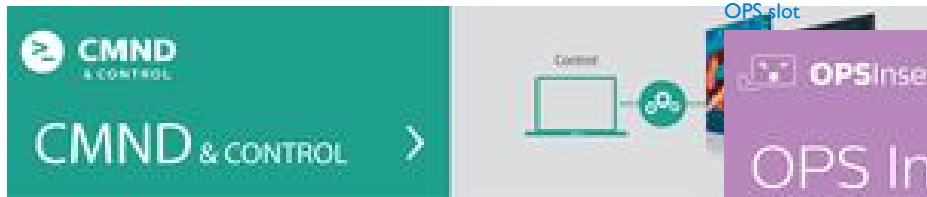

Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

Whiteboard mode built-in

Inspire agile collaboration with whiteboard mode. Simply activate this feature to turn your display into a blank canvas that can be drawn on by multiple


users by hand or with dedicated display markers. Everything on screen can then be captured for easy printing or file sharing.

Fast and easy video conference

Ready to use video conferencing software makes one-to-one or group video calls easier than ever. Simply use your own camera or add the optional Logitech Meetup bundle for an all-in-one ConferenceCam solution.

Crestron Connected certified

Integrate this Philips Professional Display to your Crestron network for full remote control via your laptop, desktop or mobile device. Switch the display on and off, schedule content, manage settings, and easily connect external devices. Crestron Connected® provides a fast, reliable and secure enterprise level solution for for system control.

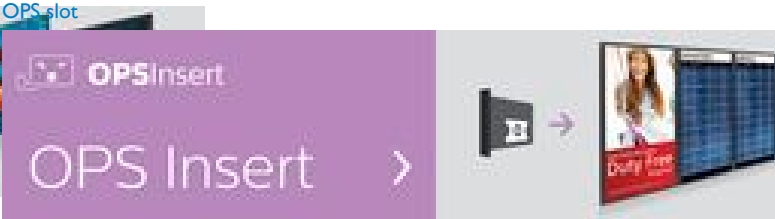

Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

Powered by Android

Control your display via an Internet connection. Android-powered Philips Professional Displays are optimized for native Android apps, and you can install web apps directly to the display too. A new Android OS ensures the software is kept secure and remain to the latest specification for longer.

Specifications

[field not found 'disclaimer\_text']

Picture/Display

Diagonal screen size (inch)	64.5 inch
Diagonal screen size (metric)	163.83 cm
Panel resolution	3840 x 2160
Optimum resolution	3840x 2160 @ 60Hz
Brightness	350 cd/m²
Contrast ratio (typical)	1300:1
Dynamic contrast ratio	500,000:1
Aspect ratio	16:9
Response time (typical)	9 ms
Pixel pitch	0.372(H) x 0.372 (V) mm
Display colors	1.07 billion
Viewing angle (horizontal)	178 degree
Viewing angle (vertical)	178 degree
Picture enhancement	3/2 - 2/2 motion pull down Motion compens. deinterlacing 3D MA deinterlacing Dynamic contrast enhancement Progressive scan
Operating system	Android 9

Video output	USB 2.0 (x2)
	USB 3.0 (x2)
Audio input	USB-C
	DisplayPort 1.2 (x1)
Audio output	DVI - D (x1)
	HDMI 2.0 (x2)
Other connections	3.5 mm jack
	3.5mm Jack (x2)
External control	OPS
	micro SD
	RJ45
	RS232C (in/out) 2.5 mm jack
	IR (in/out) 3.5 mm jack

Supported Display Resolution

Computer formats	1024x768, 60,70Hz
	1152 x 864, 60, 70, 75Hz
	1152 x 900, 66Hz
	1280 x 720, 60,70Hz
	1280 x 768, 60Hz, 75Hz
	1280 x 800, 60,75Hz
	1280 x 960, 60Hz
	1280x1024, 60,67,75Hz
	1360 x 768, 60Hz
	1366 x 768, 60Hz
	1400 x 1050 ,60, 75Hz
	1440 x 1050, 60Hz
	1440 x 900, 60, 75Hz
	1600 x 1200, 60Hz
	1600 x 900, 60Hz
	1680 x 1050, 60Hz
	1920 x 1080, 60Hz

Connectivity

Video input	HDMI 2.0 (x4)
	Display Port1.2 (x1)
	DVI-I (x 1)

	1920 x 1200, 60Hz 640 x 350, 70Hz 640 x 480, 60, 67, 72, 75Hz 720 x 400, 70Hz 800 x 600, 56, 60, 72, 75Hz 832 x 624, 75Hz 848 x 480, 60Hz 960x720, 75Hz	HDMI Cable (3m) (x1) IR sensor cable (1.8 m) (x1) Power cable (x3) RS232 Daisy chain cable (x1) Touch Pen (x2) USB A to B cable (3m) (x1) USB Cover (x1) AAA batteries (x1) Quick start guide (x1) Remote control (x1) RS232 cable (3 m) (x1)
UHD Formats	3840 x 2160, 24, 25, 30, 60 Hz 3840 x 2160, 50 Hz	
Video formats	1080i, 50, 60Hz 1080p, 50, 60Hz 480p, 60Hz 4K x 2K, 50,60Hz 576p, 50Hz 720p, 50, 60Hz	
<b>Dimensions</b>		
Set Width	1485.1 mm	
Set Height	860.10 mm	
Set Depth	86.2mm(D@wall mount)/ (97.4mm(D@speaker Cover) mm	
Set Width (inch)	58.47 inch	
Set Height (inch)	33.86 inch	
Set Depth (inch)	3.39(D@wall mount)/ 3.83(D@speaker Cover) inch	
Bezel width	1.50 mm(even)	
Product weight (lb)	100.97 lb	
Product weight	45.8 kg	
Wall Mount	400(H)x400(V) mm, M8	
Smart Insert mount	6*M4*L6, 100mm pitch, Max. Size 150mm x 300mm	
<b>Convenience</b>		
Placement	Landscape Landscape (18/7) Portrait (12/7) [Portrait (12/7)]	
Keyboard control	Hidden Lockable	
Signal loop through	RS232 IR Loophthrough	
Network controllable	RJ45 RS232	
Energy saving functions	Smart Power	
Screen saving functions	Pixel Shift, Low Bright	
Ease of installation	Smart Insert	
DPMS power saving system	Yes	
<b>Power</b>		
Standby power consumption	<0.5 W	
Mains power Consumption (Typical)	100 ~ 240 VAC, 50 ~ 60 Hz 190 W	
Consumption (Max)	320 W	
<b>Operating conditions</b>		
Temperature range (operation)	0 ~ 40 °C	
Temperature range (storage)	-20 ~ 60 °C	
Relative humidity	20 ~ 80%(operating),5 ~95%(storage) %	
Altitude	0 ~ 3000 m	
MTBF	50,000 hour(s)	
<b>Sound</b>		
Built-in speakers	2 x 20W RMS	
<b>Accessories</b>		
Included Accessories	Philips logo (x1) Cleaning cloth (x1) DVI - I Cable (1.8m) (x1)	
<b>Multimedia Applications</b>		
USB Playback Audio	AAC M4A MP3 WMA	
USB Playback Picture	BMP JPEG JPG PNG	
USB Playback Video	ASF AVI DAT FLV MKV MP4 MPEG MPG TS VOB WEBM WMV	
<b>Miscellaneous</b>		
On-Screen Display Languages	English French German Spanish Polish Turkish Russian Italian Simplified Chinese Traditional Chinese Arabic Japanese Danish Dutch Finnish Norwegian Portuguese Swedish	
Regulatory approvals	CE RoHS VCCI CB CU EMF EPA ETL FCC, Class A	
Warranty	3 year warranty	
<b>Internal Player</b>		
CPU	MTK5680	
Storage	32 GB eMMC	
Wifi	AP(WC0SR2511-88112BU) STA(WCT5GM2511MT7668AU)	
Micro SD Card	Support to 1TB	
RAM	DDR4 4GB	
<b>Multi-touch Interactivity</b>		
Touch points	10 simultaneous touch points	



data subject to change  
2023, June 19

Version: 5.1.1  
EAN: 8712581770860

© 2023 Koninklijke Philips N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

[www.philips.com](http://www.philips.com)