



Philips  
plasma monitor

117 cm (46")

WVGA

BDS4622V



## High Quality Public Display Solution

### 117 cm (46") Wide VGA Plasma Monitor

Turn heads and capture their attention with this wide VGA plasma monitor. Designed for indoor public display applications, the BDS4622 delivers outstanding picture and color display quality

#### Operational flexibility

- Remote Management and Configuration via RS232
- Multiple PC input formats up to WXGA
- Built-in audio amplifier with SRS and speakers
- Quiet and reliable fanless operation
- Enhanced zoom feature supports tiled matrix applications

#### Optimized for public viewing

- High brightness (1000cd/m2) and 3000:1 contrast ratio
- High speed color rendering for natural color reproduction
- De-contouring for better gray level display at low luminance
- 3D combfilter separates colors for a razor-sharp image
- PiP allows watching a second source simultaneously

#### Lower total cost of ownership

- Advanced anti burn-in functions to prevent ghost images

**PHILIPS**  
sense and simplicity

# Highlights

## Remote Management:: RS232

Remote Management allows the user to control and adjust the displays remotely via the RS232 protocol. Using CEC commands, you are able to have full control over all the displays in your signage network at any time.

## Multiple PC input formats

The product supports PC compatibility for VGA, SVGA, XGA and WXGA. A universal public display solution requires versatile PC input support.

## Built-in audio amp with SRS

If an application requires better sound quality, then this monitor provides SRS surround sound processing, built-in speakers and the ability to connect bigger external speakers

## Fanless operation

Fanless operation is quiet and doesn't collect dust inside the monitor thus improving product reliability.

## Zoom function for tiled matrix

The internal zoom function enables easy implementation of a video wall matrix, without the need for expensive external equipment.

Capable of many different configurations, creating a stunning video wall has become simplicity itself.

## High brightness & contrast

High brightness and contrast values are extremely beneficial in public environments where lighting conditions are variable and often beyond control.

## High speed color rendering

It is difficult to do the color rendering for both NTSC and EBU color space in conventional PDP. The built-in 12-bit high speed circuit brings pure, rich natural color reproduction in both the NTSC and EBU color space

## De-contouring

Conventional PDP's often show contouring in lower grey levels because of insufficient grey level resolution. A proprietary technology has been implemented to minimize contouring resulting in better and smoother gradients.

## 3D Combfilter

The 3D comb filter separates brightness and color signals better in 3D domain to eliminate

cross-color, cross-luminance and dot-crawl distortion - all of which detract from your viewing pleasure. The 3D digital comb filter performs field-by-field comparisons of the television image to accurately separate the color from the black-and-white information and remove both horizontally and vertically hanging dots, as well as dot crawl. The result is a razor sharp image.

## Picture In Picture (PIP)

Provides the ability to watch simultaneously two different sources, either two video sources or a combination with data/graphics

## Advanced anti burn-in function

A protective function called "pixel shift" has been implemented. When the protection mechanism is activated the screen image automatically shifts its pixel positions to prevent "image ghosting". Secondly, burn-in recovery has been implemented. Depending on the model, ghost images are removed by applying a full white signal on the whole panel for a certain amount of time or by reversing the image to achieve the same result.



# Specifications

## Picture/Display

- Panel Size: 46" / 117.8cm
- Aspect ratio: 16:9
- Panel resolution: wVGA (854 x 480 pixels)
- Pixel pitch: 1.182 x 1.182 mm / 0.0465 x 0.0465 "
- Brightness: 1000 cd/m<sup>2</sup>
- Contrast ratio (typical): 3000:1
- Display colors: 16.7 Million colors
- Viewing angle: 160° (H) / 160° (V)
- Horizontal Scanning Frequency: 30 - 91 kHz
- Vertical Scanning Frequency: 50 - 85 Hz
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, De-contouring, Picture in Picture
- Optimum resolution: 848 x 480 @ 60Hz

## Supported Display Resolution

### Computer formats

- | Resolution | Refresh rate         |
|------------|----------------------|
| 640 x 480  | 60, 72, 75, 85Hz     |
| 720 x 400  | 70Hz                 |
| 800 x 600  | 56, 60, 72, 75, 85Hz |
| 848 x 480  | 60Hz                 |
| 1024 x 768 | 60, 70, 75, 85Hz     |
- VGA 640 x 400: 85 Hz
  - MAC 640 x 480: 67 Hz
  - MAC 832 x 624: 75 Hz

### Video formats

- | Resolution | Refresh rate |
|------------|--------------|
| 480i       | 60Hz         |
| 480p       | 60Hz         |
| 576i       | 50Hz         |
| 576p       | 50Hz         |
| 720p       | 50, 60Hz     |
| 1080i      | 60Hz         |
| 1080i      | 50Hz         |

## Connectivity

- PC: DVI-D x1, VGA-in D-Sub 15HD, RS232 D-Sub9, 3.5 mm PC audio input x1
- AV input: Component (YPbPr) x1, Audio (L/R) for YPbPr x1, S-video x2, Composite (CVBS) x 2, Audio (L/R)x2 for CVBS & S-Vid
- Audio cinch out: Analog audio output L/R
- Connectivity Enhancements: External Loudspeaker connector

## Convenience

- Screen Format Adjustments: 5x zoom function for matrixing
- Picture in Picture: Picture in Picture All Inputs, Double window
- Network controllable: RS232
- User convenience: On-screen Display
- Monitor Controls: Left/Right, Power On/Off, Up/Down
- OSD Languages: English, French, German, Italian, Spanish
- SRS sound processing
- Built-in Audio: Built-in amplifier (2x10) and 2 Watts RMSx2 stereo speakers
- DPMS power saving system
- Screen saving functions: Full white, image reverse, pixel shift
- Regulatory approvals: CE Mark, FCC-B, UL, CSA

## Power

- Consumption (On mode): 330 Watts (average)
- Power supply: 100-240VAC, 50/60Hz
- Sleep Mode: 5 Watts Max.

## Dimensions


- Set dimensions in inch (W x H x D): 44.803 x 27.205 x 3.858 inch
- Dimensions (without base) (W x H x D): 1138 x 691 x 98 mm
- Product weight (lb): 81.4
- Temperature range (operation): 0°C to 40°C
- Relative humidity: 20% - 80%
- Lifetime to 50% brightness: 30000 hr

## Accessories

- Included accessories: AC Power Cord, Remote Control, Battery, S-video cable, AV cable, 3xRCA to 3x RCA, Audio Cable, VGA cable
- User Guide on CD-ROM
- Optional accessories: Ceiling mount, Flexible wall mount, Fixed wall mount, Table top stand
- User Manual: Eng, Ger, Fre, Spa, Ita

## Miscellaneous

- Bezel: Metallic Antracite

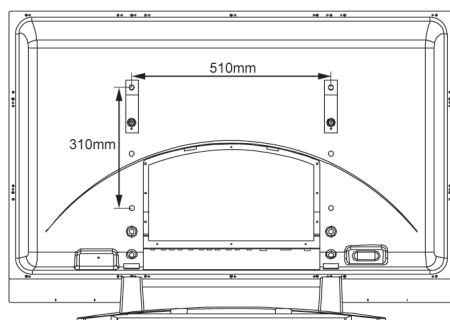

Issue date 2012-07-06

Version: 2.0.5

12 NC: 8639 000 16287

© 2012 Koninklijke Philips Electronics N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips  
Electronics N.V. or their respective owners.

[www.philips.com](http://www.philips.com)