



Philips
plasma monitor

107cm (42")
WVGA

BDS4221

Multi-Purpose Public Display Solution

107 cm (42") Wide VGA Plasma Monitor

State of the art, cost effective plasma monitor specially designed for indoor public display applications. The high class scaler, advanced digital video processing and the latest plasma technology guarantee optimal display of your message.

Operational flexibility

- Multiple video input formats up to SXGA and HDTV compatible
- VGA Loophthrough
- Wide choice of analog and digital connectivity
- Built-in audio amplifier with SRS and speakers
- Portrait mode operability
- Quiet and reliable fanless operation
- Remote Management and Configuration via RS232
- Built-in tuner and extended video connectivity

Optimized for public viewing

- High brightness (1000cd/m²) and 2000:1 contrast ratio
- Motion Adaptive De-interlacing for razor sharp images
- 3D combfilter separates colors for a razor-sharp image
- PiP allows watching a second source simultaneously

PHILIPS

Highlights

Multiple video input formats

In common use video content is often supplied in various formats in different resolutions and aspect ratios. Thus the content needs to be reformatted for optimal display on given screen resolution. A high class scaler guarantees optimal reformatting of any video format up to SXGA.

VGA Loophrough

Connect multiple displays to create a video wall of up to 150 displays via a VGA daisy chain thus enhancing your visual experience. With no additional hardware required, they are as simple to install as they are captivating to your audience.

Portrait mounting possible

This display is also able to be safely and reliably mounted in portrait position.

Fanless operation

Fanless operation is quiet and doesn't collect dust inside the monitor thus improving product reliability.

Remote Management:: RS232

Remote Management allows the user to control and adjust the displays remotely via the RS232 protocol. Using CEC commands, you are able to have full control over all the displays in your signage network at any time.

Motion adaptive de-interlacing

This smart de-interlacing algorithm is able to detect the type of video source (such as Still Picture, Motion Picture or Film) and automatically optimize the de-interlacing process with Spatial, Temporal or Film mode de-interlacing. The result is that it delivers razor sharp and stable images every time.

3D Combfilter

The 3D comb filter separates brightness and color signals better in 3D domain to eliminate cross-color, cross-luminance and dot-crawl distortion - all of which detract from your viewing pleasure. The 3D digital comb filter performs field-by-field comparisons of the television image to accurately separate the color from the black-and-white information and remove both horizontally and vertically hanging dots, as well as dot crawl. The result is a razor sharp image.

Picture In Picture (PIP)

Provides the ability to watch simultaneously two different sources, either two video sources or a combination with data/graphics



Specifications

Picture/Display

- Panel Size: 42" / 106.7cm
- Aspect ratio: 16:9
- Panel resolution: wVGA (854 x 480 pixels)
- Pixel pitch: 1.08 x 1.08 mm
- Brightness: 1000 cd/m²
- Contrast ratio (typical): 2000:1
- Display colors: 16.7 Million colors
- Viewing angle: 160° (H) / 160° (V)
- Horizontal Scanning Frequency: 15 - 91 kHz
- Vertical Scanning Frequency: 50 - 85 Hz
- Picture enhancement: 3D Combfilter, Picture in Picture

Supported Display Resolution

Computer formats

- | Resolution | Refresh rate |
|-------------|---------------------|
| 640 x 480 | 60, 72, 75, 85Hz |
| 800 x 600 | 56, 60, 72, 75,85Hz |
| 720 x 400 | 70Hz |
| 1024 x 768 | 60, 70, 75, 85Hz |
| 1280 x 1024 | 60Hz |
- MAC 640 x 480: 67 Hz
 - MAC 832 x 624: 75 Hz
 - MAC 1152 x 870: 75 Hz
 - VGA 640 x 350: 70 Hz
 - VGA 640 x 400: 50 Hz
 - WVGA 852 x 480: 60 Hz

Video formats

- | Resolution | Refresh rate |
|------------|--------------|
| 480i | 60Hz |
| 480p | 60Hz |
| 576i | 50Hz |
| 576p | 50Hz |
| 720p | 50, 60Hz |
| 1080i | 50, 60Hz |

Tuner/Reception/Transmission

- TV system: PAL, SECAM

Connectivity

- PC: DVI-D x1, RS232 D-Sub9, VGA-in D-Sub 15HD, VGA-out D-Sub 15HD
- Audio input for data: Audio Left/Right (RCA) 2x
- AV input: Component (YPbPr) x1, S-video x1, SCART x1, Audio (L/R) for YPbPr x1
- Audio input for video: Audio Left/Right (RCA x 2)

- Audio cinch out: Analog audio output L/R
- Other connections: Antenna

Convenience

- Picture in Picture: Picture in Picture All Inputs, Double window
- Network controllable: RS232
- User convenience: On-screen Display
- OSD Languages: English, French, German, Italian, Spanish
- Monitor Controls: Power On/Off, Menu (OK), Source Select, Up/Down, Left/Right, Volume control
- DPMS power saving system
- Built-in Audio: Built-in amplifier and 5 Watts RMSx2 stereo speakers
- SRS sound processing
- Teletext: 10 pages
- Screen saving functions: Full white, pixel shift
- Regulatory approvals: CE Mark, FCC-B, UL, CSA

Power

- Consumption (On mode): 380 +/-10% Watts (at 110Vac/color bar pattern)
- Power supply: 100-240VAC, 50/60Hz
- Sleep Mode: 5 Watts Max.

Dimensions


- Dimensions (without base) (W x H x D): 1081 x 677 x 95 mm
- Dimensions (with base) (W x H x D): 1081 x 722 x 291 mm
- Weight: 36.5 kg
- Temperature range (operation): 0°C to 40°C
- Temperature range (storage): -5°C to +50°C
- Relative humidity: 20% - 80%
- Lifetime to 50% brightness: 25000 hr

Accessories

- Included accessories: AC Power Cord, Battery, Remote Control, Table top stand, VGA cable
- Optional accessories: Ceiling mount, Flexible wall mount, Fixed wall mount
- User Manual: Eng, Ger, Dut, Fre, Spa, Ita, Por

Miscellaneous

- Bezel: Silver

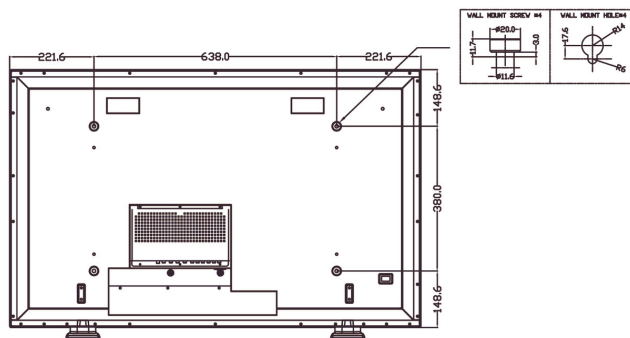

Issue date 2022-05-11

Version: 6.0.7

12 NC: 8639 000 16135
EAN: 87 10895 88948 3

© 2022 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com