

Philips Brilliance  
LCD monitor with  
SmartImage

### B Line

25" (63.4 cm)  
Quad HD (2560 x 1440)

258B6QJEB



## Crisp images, efficient performance

for maximum productivity

The Philips AH-IPS LED display, using 65% post-consumer recycled plastics and BFR-free PVC is ideal for eco-friendly productivity.

#### Excellent performance

- Less eye fatigue with Flicker-Free technology
- SmartImage pre-sets for easy optimised image settings
- AH-IPS display for brilliant images with vivid colours
- Crystal clear images with Quad HD 2560 x 1440 pixels
- Edge-to-edge glass and narrow border for seamless appearance

#### Designed for people

- Low bezel-to-table height for maximum reading comfort
- SmartErgoBase enables user-friendly ergonomic adjustments

#### Easy to experience


- HDMI ensures universal digital connectivity
- USB 3.0 enables fast data transfers and smart phone charging
- Built-in stereo speakers for multimedia
- DisplayPort connection for maximum visuals

# PHILIPS

LCD monitor with SmartImage  
B Line 25" (63.4 cm), Quad HD (2560 x 1440)


# Highlights

## CrystalClear images

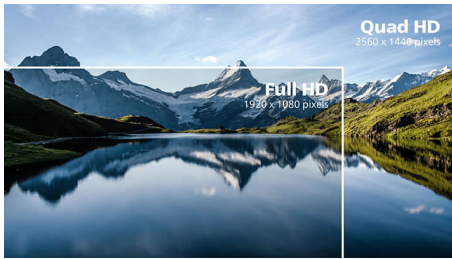

These Philips screens deliver Crystal Clear, Quad HD 2560 x 1440 or 2560 x 1080 pixel images. Utilising high-performance panels with a high-density pixel count, enabled by high bandwidth sources like USB-C, Displayport and HDMI, these new displays will make your images and graphics come alive. Whether you are a demanding professional who requires extremely detailed information for CAD-CAM solutions and uses 3D graphic applications, or a financial wizard working on huge spreadsheets, Philips displays will give you Crystal Clear images.

## AH-IPS technology

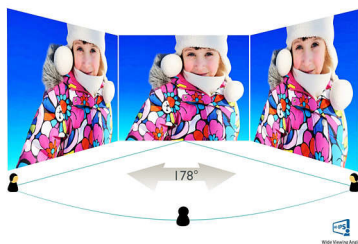

This latest Philips display uses advanced AH-IPS panels, resulting in superior colour reproduction, response time and power consumption. Unlike standard TN panels, AH-IPS panels show consistent colour even at 178-degree wide angles and in pivot mode. With remarkable performance, AH-IPS is best suited for applications demanding colour accuracy and consistent brightness at all times, such as

photo retouching, graphics applications and web browsing.

## Flicker-Free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-Free technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

## SmartImage



SmartImage is an exclusive leading edge Philips technology that analyses the content displayed on your screen and optimises your display performance. This user-friendly interface allows you to select various modes, like Office, Photo, Movie, Game, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimises the contrast, colour saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time at the touch of a single button!


258B6QJEB/00

## Super-Narrow Border



Utilising the latest technology panels, the new Philips displays are designed with a minimalistic approach by limiting the outer bezel thickness to about 2.5 mm. Combined with an in-panel black matrix strip of only 3.5 mm, the overall border dimensions are reduced significantly, minimising distractions and maximising viewing size. Especially suited to multi-display or tiling setups like gaming, graphic design and professional applications, the ultra-narrow bezel display gives you the feeling of using one large display.

## SmartErgoBase

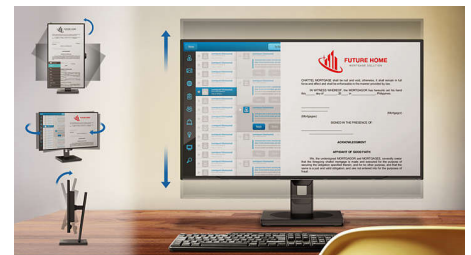

The SmartErgoBase is a monitor base that delivers ergonomic display comfort and provides cable management. The base can swivel, tilt and rotate to various angles to ensure maximum comfort. The height-adjustable stand guarantees the optimal viewing level, reducing the physical strains of a long workday, while cable management reduces cable clutter and keeps the workspace neat and professional.



# Specifications

## Connectivity

- Signal Input: VGA (Analogue), DVI-Dual Link (digital, HDCP), DisplayPort x 1, HDMI (digital, HDCP)
- USB: USB 2.0 x 2, USB 3.0 x 2 (1 with B.C.1.2)
- Sync Input: Separate Sync, Sync on Green
- Audio (In/Out): PC audio-in, Headphone out

## Picture/Display

- Panel Size: 25 inch / 63.4 cm
- Aspect ratio: 16:9
- LCD panel type: AH-IPS LCD
- Backlight type: W-LED system
- Pixel pitch: 0.216 x 0.216 mm
- Optimum resolution: 2560 x 1440 @ 60Hz
- Brightness: 350 cd/m<sup>2</sup>
- Display colours: 16.7 M (True 8 bit)
- Contrast ratio (typical): 1000:1
- SmartContrast: 20,000,000:1
- Response time (typical): 14 (GtG) ms
- Viewing angle: 178° (H)/178° (V), @ C/R &gt; 10
- Picture enhancement: SmartImage
- Effective viewing area: 552.96 (H) x 311.04 (V)
- Scanning Frequency: 30 - 83 kHz (H) / 56 - 76 Hz (V)
- sRGB
- SmartResponse (typical): 5 ms (GtG)

## Convenience

- Built-in Speakers: 2 W x 2
- Plug and Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 8.1 / 8 / 7
- User convenience: SmartImage, Volume, Input, Menu, Power On/Off
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, VESA mount (100 x 100 mm)
- Control software: SmartControl Premium

## Stand

- Height adjustment: 130 mm
- Pivot: 90 degree
- Swivel: -65/65 degree
- Tilt: -5/20 degree

## Power

- ECO mode: <18.9 W (typ.)

- Power supply: Built-in, 100–240 VAC, 50–60 Hz
- Off mode: Zero watts with AC switch
- On mode: 24.6 W (typ.) (EnergyStar 6.0 test method)
- Standby mode: <0.5 W (typ.)
- Power LED indicator: Operation - White, Standby mode - White (flashing)

## Dimensions

- Packaging in mm (W x H x D): 625 x 421 x 290 mm
- Product without stand (mm): 571 x 344 x 55 mm
- Product with stand (max height): 571 x 511 x 244 mm

## Weight

- Product with packaging (kg): 7.81 kg
- Product with stand (kg): 7.00 kg
- Product without stand (kg): 4.66 kg

## Operating conditions

- Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
- Temperature range (operation): 0°C to 40°C °C
- Relative humidity: 20%–80% %
- Temperature range (storage): -20°C to 60°C °C
- MTBF (demonstrated): 70,000 (excluded backlight)

## Sustainability

- Environmental and energy: EnergyStar 6.0, EPEAT\*, TCO Certified Edge, RoHS
- Post-consumer recycled plastic: 65%
- Recyclable packaging material: 100 %
- Specific Substances: PVC/BFR free housing, Mercury free

## Compliance and standards

- Regulatory Approvals: CE Mark, FCC Class B, SEMKO, cETLus, CU-EAC, EPA, PSB, WEEE, CECP, TUV Ergo, TUV/GS

## Cabinet

- Finish: Texture
- Foot: Black
- Front bezel: Black
- Rear cover: Black

## What's in the box?

- Cables: VGA, DVI, Audio, Power
- Monitor with stand
- User Documentation



Issue date 2024-04-24

Version: 2.1.2

EAN: 87 12581 73062 8

© 2024 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)

\* "IPS" word mark / trademark and related patents on technologies belong to their respective owners.

\* EPEAT Gold is valid only where Philips registers the product. Please visit [www.epeat.net](http://www.epeat.net) for registration status in your country.

\* Smart response time is the optimum value from either GtG or GtG (BW) tests.