



#### P-Line Display

- 49"
- Powered by Android
- 700cd/m<sup>2</sup>

49BDL5057P/00

## Tough and capable

Robust, bright 24/7 display.

Meet the demands of challenging environments with a robust P-Line professional Full HD display. Tough components keep this display working from kitchen to engine room. The wide viewing angle ensures crucial information is clear.

### Benefits

#### Brilliant picture. Strong build.

- Android SoC processor. Native and web apps
- D-image: clinically accurate imaging
- IPS panel: rich color consistency from every angle
- Robust metal housing

#### Effortless setup. Total control.

- Operate, monitor and maintain with CMND & Control
- CMND & Create. Develop and launch your own content
- CMND & Deploy. Install and launch apps remotely

- Integrated mPCIe slot for optional 4G/LTE module
- Proof of Play for Android content. Know what's playing

#### Robust system solution

- FailOver ensures content is always playing
- OPS slot allows for PC embedding without cabling
- Energy-saving automatic backlight control
- Integrated HTML5 browser. Play and control online content

### Features

#### Powered by Android

Control your display via an Internet connection. Android-powered Philips Professional Displays are optimized for native Android apps, and you can

# PHILIPS


install web apps directly to the display too. A new Android OS ensures the software is kept secure and remain to the latest specification for longer.

### D-image



This Philips Professional Display is factory-calibrated to meet clinical compliance standards for greyscale performance. The optimal image achieved by the display can be used to review medical images in consultation rooms or lecture theatres.

### CMND & Control

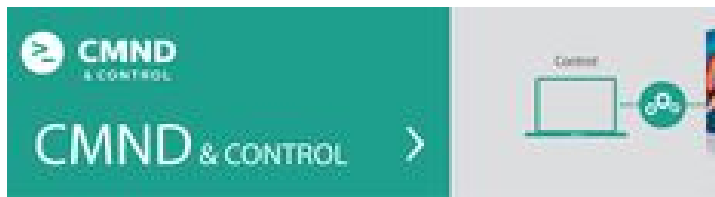

Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

### CMND & Create



Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and

integrated widgets ensure your stills, text, and video will be up and running in no time.

### CMND & Deploy

Quickly install and launch any app-even when you're off-site and working remotely. CMND & Deploy lets you add and update your own apps, as well as apps from the Philips Professional Display App Store. Simply scan the QR code, log in to the store, and click on the app you want to install. The app is automatically downloaded and launched.

### Integrated mPCIe slot


Easily connect 4G/LTE modules to your Philips professional display. The integrated mPCIe slot enables your display to communicate with other devices that share the same wireless connectivity. Invaluable if you're installing displays in locations such as banks or government buildings, where you cannot get onto the local network.

### FailOver



From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

### OPS slot

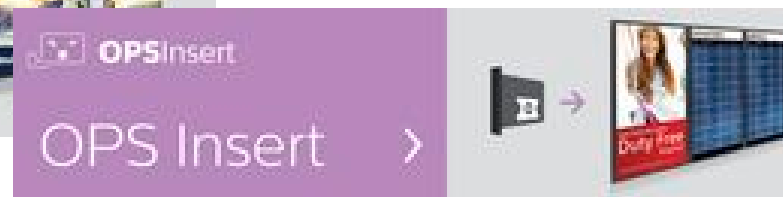

Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

## Specifications

[field not found 'disclaimer\_text']

### Picture/Display

Diagonal screen size (inch)	48.5 inch
Diagonal screen size (metric)	123.2 cm
Panel resolution	1920x1080p
Optimum resolution	1920 x 1080 @ 60Hz
Brightness	700 cd/m <sup>2</sup>
Contrast ratio (typical)	1300:1
Dynamic contrast ratio	500,000:1
Aspect ratio	16:9
Response time (typical)	8 ms
Pixel pitch	0.55926 x 0.55926 mm
Display colors	1.07 billion
Viewing angle (horizontal)	178 degree
Viewing angle (vertical)	178 degree
Operating system	Android 5.1.1

### Connectivity

Video input	Display Port1.2 (x1) DVI-I (x 1) HDMI 1.4 (x2) USB 2.0 (x2) USB 2.0 (x1)
Video output	DVI-I (x1) DisplayPort 1.2 (x1)
Audio input	3.5 mm jack
Audio output	3.5mm jack
Other connections	Micro SD (x1) Micro USB(type B)x1 OPS
Optional WiFi functionality	requires WiFi module and external antennas
External control	RJ45 RS232C (in/out) 2.5 mm jack IR (in/out) 3.5 mm jack

### Supported Display Resolution

Computer formats	1920 x 1080, 60Hz 1360 x 768, 60Hz 1280 x 800, 60Hz 1280 x 768, 60Hz
------------------	-------------------------------------------------------------------------------

	1024 x 768, 60, 75Hz 1280 x 1024, 60Hz 1600 x 1200, 60Hz 640 x 480, 60, 72, 75Hz 720 x 400, 70Hz 800 x 600, 60, 75Hz 1080p, 50, 60Hz 720p, 50, 60Hz 576p, 50Hz 480p, 60Hz 1080i, 25, 30Hz 480i, 30Hz 576i, 25Hz		
Video formats		Included Accessories	AC Power Cord RS232 cable Edge Alignment Kit (1)-2pcs Edge Alignment Kit (2)-1pcs Logo guide Philips logo (x1) Thumbscrew (8pcs) RS232 daisy-chain cable BM04642/00( optional)
		Stand	
		Multimedia Applications	
		USB Playback Audio	AAC M4A MP3 WMA MP1 MP2
		USB Playback Picture	BMP GIF JPEG JPG PNG
		USB Playback Video	MKV MP4 MPG TS VOB 3GP AVI DAT FLV MOV WEBM
<b>Dimensions</b>			
Set Width	1092.8 mm		
Set Height	623.0 mm		
Set Depth	71.1 mm		
Set Width (inch)	43.0 inch		
Set Height (inch)	24.5 inch		
Set Depth (inch)	2.80 inch		
Bezel width	6.5 mm		
Product weight (lb)	41.9 lb		
Product weight	19.0 kg		
VESA Mount	400 x 400 mm, M6		
<b>Convenience</b>			
Placement	Landscape Portrait		
Tiled Matrix	Up to 15 x 15		
Keyboard control	Hidden Lockable		
Signal loop through	DVI VGA RS232 IR Loophthrough DisplayPort		
Network controllable	RJ45 RS232 HDMI (One Wire)		
Energy saving functions	Smart Power		
Screen saving functions	Pixel Shift, Low Bright		
Ease of installation	AC Out Carrying Handles		
Other convenience	G sensor		
<b>Power</b>			
Standby power consumption	<0.5 W		
Mains power Consumption (Typical)	100 ~ 240 VAC, 50 ~ 60 Hz 95 W		
Consumption (Max) Energy Label Class	240 W G		
<b>Operating conditions</b>			
Temperature range (operation)	0 ~ 40 °C		
Temperature range (storage)	-20 ~ 60 °C		
Relative humidity	20 ~ 80 %		
Altitude	0 ~ 3000 m		
MTBF	60,000 hour(s)		
<b>Sound</b>			
Built-in speakers	2 x 10W RMS		
<b>Accessories</b>			
Included accessories	Remote Control Batteries for remote control Quick start guide		
		Miscellaneous	
		On-Screen Display Languages	English French German Spanish Polish Turkish Russian Italian Simplified Chinese Traditional Chinese Arabic Japanese Danish Dutch Finnish Norwegian Portuguese Swedish
		Regulatory approvals	CE CCC CB CECP BSMI EAC EnergyStar 7.0 UL/cUL VCCI EMF PSB FCC, Class A PSE
		Warranty	3 year warranty
		Internal Player	
		CPU	Octacore Cortex A53 1.5GHz
		GPU	PowerVR SGX6110
		Memory	2GB DDR3
		Storage	16GB EMMC



data subject to change  
2021, June 5

Version: 11.1.1  
EAN: 8712581742218

© 2021 Koninklijke Philips N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

[www.philips.com](http://www.philips.com)