

Philips Brilliance
4K Ultra HD LCD display
with MultiView

32" / 81.3 cm
4K UHD (3840 x 2160)

BDM3275UP



4K Ultra High Definition

See the big picture with all the details

The expansive 32" Ultra HD professional Philips display gives you the room to spread out, see the big picture and all the details in Ultra High Definition.

Brilliant performance

- 1.074 billion colours for smooth colour gradations and detail
- Less eye fatigue with Flicker-Free technology
- IPS-AHVA wide-view technology for image and colour accuracy
- UltraClear 4K UHD (3840 x 2160) resolution for precision

Designed for the way you work

- Built-in stereo speakers for multimedia
- MultiView enables simultaneous dual connection and view
- SmartErgoBase enables user-friendly ergonomic adjustments
- Low bezel-to-table height for maximum reading comfort

Easy to connect and enjoy


- MHL technology for enjoying mobile content on a big screen
- USB 3.0 enables fast data transfers and smart phone charging
- DisplayPort connection for maximum visuals
- HDMI for quick digital connection

PHILIPS

4K Ultra HD LCD display with MultiView
32" / 81.3 cm 4K UHD (3840 x 2160)


Highlights

UltraClear 4K UHD Resolution

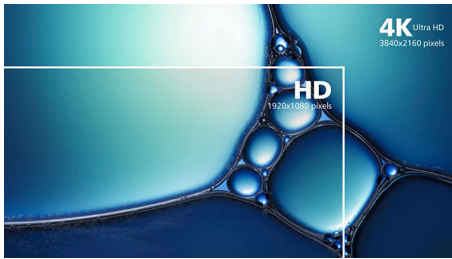


These Philips displays utilise high-performance panels to deliver UltraClear, 4K UHD (3840 x 2160) resolution images. Whether you are a demanding professional requiring extremely detailed images for CAD solutions, a user of 3D graphics applications or a financial wizard working on huge spreadsheets, Philips displays will make your images and graphics come alive.

IPS-AHVA display

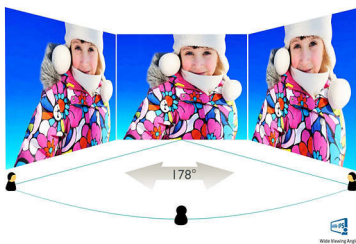

IPS-AHVA displays use an advanced technology that gives you extra-wide viewing angles of 178/178 degrees, making it possible to view the display from almost any angle. Unlike standard TN panels, IPS-AHVA displays give you remarkably crisp images with vivid colours, making them ideal not only for Photos, movies and web browsing, but also for professional applications that demand colour accuracy and consistent brightness at all times.

10-bit colours

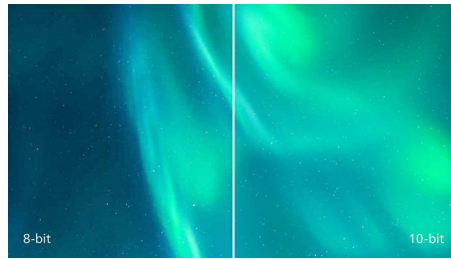

The 10-bit display delivers rich colour depth with 1.074 billion colours and 12-bit internal processing for recreating smooth, natural colours without gradations and colour banding.

Flicker-Free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-Free technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

HDMI ready




Enjoy crisp colourful images and audio with simple one-cable connection. A HDMI-ready

BDM3275UP/00


device has all the required hardware to accept High-Definition Multimedia Interface (HDMI) input. A HDMI cable enables high-quality smooth digital video (up to 4K/UHD resolution at 60 Hz) and audio all transmitted over a single cable from a PC or any number of AV sources (including set-top boxes, DVD players, A/V receivers and video cameras).

MultiView technology

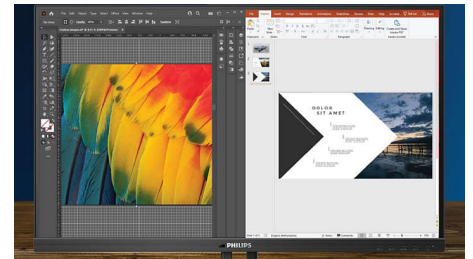

With the ultra-high resolution Philips MultiView display, you can now experience a world of connectivity. MultiView enables active dual connect and view so that you can work with multiple devices like a PC and notebook simultaneously, for complex multitasking.

SmartErgoBase

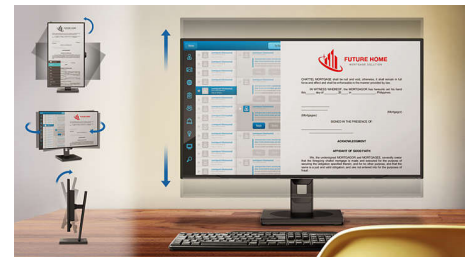

The SmartErgoBase is a monitor base that delivers ergonomic display comfort and provides cable management. The base can swivel, tilt and rotate to various angles to ensure maximum comfort. The height-adjustable stand guarantees the optimal viewing level, reducing the physical strains of a long workday, while cable management reduces cable clutter and keeps the workspace neat and professional.

4K
Ultra HD

WVA-IPS
Wide Viewing Angle

Flicker-free

Multiview

SmartErgo Base

Built-in Speaker

P

MHL
Mobile High-Definition Link

USB 3.0

Specifications

Connectivity

- Signal Input: VGA (Analogue), DVI-Dual Link (digital, HDCP), DisplayPort x 1, HDMI (2.0) — MHL x 1
- USB: USB 3.0 x 4 with B.C.1.2
- Sync Input: Separate Sync, Sync on Green
- Audio (In/Out): PC audio-in, Headphone out

Picture/Display

- Panel Size: 32 inch / 81.3 cm
- Aspect ratio: 16:9
- LCD panel type: IPS-AHVA LCD
- Backlight type: W-LED system
- Pixel pitch: 0.1845 x 0.1845 mm
- Optimum resolution: 3840 x 2160 @ 60 Hz
- Brightness: 350 cd/m²
- Brightness uniformity: 93 ~ 105%
- Display colours: Colour support 1.07 billion colours
- Contrast ratio (typical): 1000:1
- SmartContrast: 50,000,000:1
- Response time (typical): 4 ms (Grey to Grey)*
- Viewing angle: 178° (H)/178° (V), @ C/R > 10
- Picture enhancement: SmartImage
- Effective viewing area: 708.48 (H) x 398.52 (V)
- Scanning Frequency: 30 - 83 kHz (H) / 56 - 76 Hz (V)
- sRGB
- MHL: 1080P @ 60 Hz

Convenience

- Built-in Speakers: 3 W x 2
- Plug and Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 8.1 / 8 / 7
- User convenience: SmartImage, Multi-view, User, Menu, Power On/Off
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, VESA mount (100 x 100 mm)
- Control software: SmartControl Premium
- MultiView: PIP/PBP mode, 2 x devices

Stand

- Height adjustment: 180 mm
- Pivot: 90 degree
- Swivel: -170/+170 degree
- Tilt: -5/20 degree

Power

- ECO mode: 33.3 W (typ.)

- Power supply: Built-in, 100–240 VAC, 50–60 Hz
- Off mode: Zero watts with Zero switch
- On mode: 41.1 W (typ.) (EnergyStar 7.0 test method)
- Standby mode: < 0.5 W (typ.)
- Power LED indicator: Operation - White, Standby mode - White (flashing)

Dimensions

- Packaging in mm (W x H x D): 970 x 526 x 224 mm
- Product without stand (mm): 742 x 438 x 61 mm
- Product with stand (max height): 742 x 657 x 270 mm

Weight

- Product with packaging (kg): 15.20 kg
- Product with stand (kg): 10.90 kg
- Product without stand (kg): 7.94 kg

Operating conditions

- Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
- Temperature range (operation): 0°C to 40°C °C
- Relative humidity: 20%–80% %
- Temperature range (storage): -20°C to 60°C °C
- MTBF (demonstrated): 70,000 hrs (excluded backlight)

Sustainability

- Environmental and energy: EnergyStar 7.0, TCO Certified Edge, RoHS
- Post-consumer recycled plastic: 65%
- Recyclable packaging material: 100 %
- Specific Substances: PVC/BFR free housing, Mercury free

Compliance and standards

- Regulatory Approvals: CE Mark, FCC Class B, BSMI, KCC, E-standby, ICES-003, KC, J-MOSS, cETLus, EPA, TUV/GS, TUV Ergo, PSB, CU-EAC, SEMKO, SASO, KUCAS, UKRAINIAN, PSE, CECP, WEEE, TCO Certified Edge

Cabinet

- Finish: Texture
- Foot: Black
- Front bezel: Black
- Rear cover: Black

What's in the box?

- Cables: VGA, DVI, HDMI, DP, Audio, Power
- Monitor with stand
- User Documentation



Issue date 2024-03-24

Version: 6.2.1

EAN: 87 12581 72950 9

© 2024 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com

* This Philips display is MHL-certified. However, if your MHL device does not connect or work correctly, check with your MHL device FAQ or vendor directly for instructions. The policy of your device manufacturer may require you to purchase its brand-specific MHL cable or adapter in order for it to work.

* Requires optional MHL-certified mobile device and MHL cable (not included). Please check with your MHL device vendor for compatibility.

* Standby/Off energy saving of ErP is not applicable for the MHL charging functionality

* For a complete list of MHL-enabled products, refer to www.mhlconsortium.org

* "IPS" word mark / trademark and related patents on technologies belong to their respective owners.

* EPEAT Gold is valid only where Philips registers the product. Please visit www.epeat.net for registration status in your country.

* Response time value equal to SmartResponse