



Philips Signage Solutions  
Video Wall Display

55"

Direct LED Backlight  
Full HD  
700 cd/m<sup>2</sup>



55BDL8007X

## Impressive videowall

Inspire your team and guests

Take presentations and corporate branding to the next level. The Philips X-Line Videowall display brings your content to life to ensure absolute audience engagement in every setting with Pure Colour Pro.

### Effortless setup. Total control.

- Operate, monitor and maintain with CMND and Control
- Add Android processing power with an optional CRD50 module

### Powerful system solution

- Energy-saving automatic backlight control
- OPS slot allows for PC embedding without cabling
- Tiling mode. Create tiled 4K videowalls of any size

### Brilliant images. Endless possibilities.

- Full HD monitors. Brilliant images. Clear contrast
- IPS panel: rich colour consistency from every angle
- Ultra-narrow bezels. For distraction-free images


### Cost-effective system solution

- FailOver ensures that content is always playing

# PHILIPS

# Highlights

## CMND and Control




Run your display network over a local (LAN) connection. CMND and Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

## Energy saving

Energy-saving automatic backlight control

## FailOver

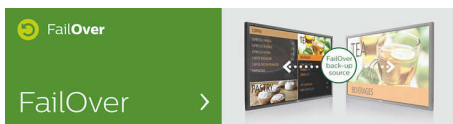

From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically

between primary and secondary inputs, ensuring that content keeps playing even if the primary source goes down. Simply set a list of alternative inputs to be sure your business is always on.


## Full HD monitors

Full HD monitors. Brilliant images. Clear contrast

## IPS panel rich colour

IPS panel: rich colour consistency from every angle

## OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all

the connections you need to run your slot-in solution, including a power supply.

## Optional CRD50 module

Embed an Android System-on-Chip (SoC) into your Philips Professional Display. The optional CRD50 module is an OPS device that enables Android processing power without the need for cables. Simply slide into the OPS slot, which contains all the connections needed to run the module (including power supply).

## Tiling mode

Connect two or more Philips professional displays to create a tiled videowall — without the need for external devices. A single player takes care of content, whether you have four screens or 40. 4K content is fully supported and if you're showing that content on four screens you get the best possible dot-by-dot resolution.

# Specifications

## Picture/Display

- Diagonal screen size (metric): 138.7 cm
- Diagonal screen size (inch): 54.5 inch
- Aspect ratio: 16:9
- Panel resolution: 1920 x 1080p
- Pixel pitch: 0.63 x 0.63 mm
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 700 cd/m<sup>2</sup>
- Display colours: 1.07 B
- Contrast ratio (typical): 1100:1
- Dynamic contrast ratio: 500,000:1
- Response time (typical): 8 ms
- Viewing angle (horizontal): 178 degree
- Viewing angle (vertical): 178 degree
- Haze: 28%

## Connectivity

- Audio output: 3.5 mm Mini Jack (x 1)
- Video input: DVI-D (x 1), VGA (Analogue D-Sub) (x 1), Display Port 1.3 (x 1), HDMI 2.0 (x 2)
- Audio input: 3.5 mm mini jack (x 1)
- Other connections: OPS, USB 2.0 (x 1), Thermal sensor
- Video output: Display Port 1.3 (x 1)
- External control: IR (in) 3.5 mm jack, LAN RJ45 (x2), Signal loopthrough RJ45 (x 2)

## Convenience

- Placement: Landscape (24/7), Portrait (24/7)
- Tiled Matrix: Up to 15 x 15
- Screen-saving functions: Pixel Shift, Low Bright
- Signal loop through: DisplayPort, RJ45
- Ease of installation: Carrying Handles, Smart Insert
- Energy-saving functions: Smart Power
- Network controllable: LAN (RJ45)

## Sound

- Built-in speakers: 2 x 10 W (RMS)

## Power

- Consumption (On mode): 150 W
- Consumption (Typical): 190 W
- Consumption (Max): 370 W
- Standby power consumption: 0.5 W
- Energy Label Class: G

## Supported Display Resolution

- Computer formats: 640 x 480, 60, 72, 75 Hz, 720 x 400, 70 Hz, 800 x 600, 60, 75 Hz, 1024 x 768, 60,

- 75 Hz, 1280 x 768, 60 Hz, 1280 x 800, 60 Hz, 1280 x 960, 60 Hz, 1280 x 1024, 60 Hz, 1360 x 768, 60 Hz, 1366 x 768, 60 Hz, 1600 x 1200, 60 Hz, 1920 x 1080, 60 Hz
- Video formats: 720p, 50, 60 Hz, 1080i, 25, 30 Hz, 1080p, 50, 60 Hz, 2160 P 50, 60 Hz ((HDMI/OPS/DP)

## Dimensions

- Smart Insert mount: 100 mm x 100 mm, 6xM4xL6
- Set Width: 1210.5 mm
- Product weight: 23.8 kg
- Set Height: 681.2 mm
- Set Depth: 97.3 mm(D@WallMount)/98.4 mm(D@Handle) mm
- Set Width (inch): 47.66 inch
- Set Height (inch): 26.82 inch
- Wall Mount: 400 mm x 400 mm, M6
- Set Depth (inch): 3.83 (D@WallMount)/3.87 (D@Handle) inch
- Bezel width: 0.44 mm + 0.44 mm

## Operating conditions

- Altitude: 0 ~ 3000 m
- Temperature range (operation): 0 ~ 40 °C
- MTBF: 50,000 hour(s)
- Temperature range (storage): -20 ~ 60 °C
- Humidity range (operation)[RH]: 20 - 80% (without condensation)
- Humidity range (storage) [RH]: 5 - 95% (without condensation)

## Accessories

- Included Accessories: AC Switch Cover, Gap pad x 3, IR sensor cable (1.8 m) (x 1), Quick start guide (x 1), Remote control and AAA batteries, RJ45/RS232 converter, Wire Clamper (x 3), Power cord, DP cable (x1), RJ45 cable (x1), Edge alignment pin (x2), Kit-1 (x1), Kit-2 (x2)

## Miscellaneous

- On-Screen Display Languages: Arabic, English, French, German, Italian, Japanese, Polish, Russian, Spanish, Simplified Chinese, Turkish, Traditional Chinese
- Warranty: 3 year warranty
- Regulatory approvals: CE, FCC, Class A, RoHS, CB, BSMI, ETL, PSE



Issue date 2024-10-15

Version: 12.0.1

EAN: 87 12581 77901 6

© 2024 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)