

# PHILIPS

4K Ultra HD LCD display  
with MultiView

Business Monitor

P Line

43 (42.51" / 108 cm diag.)

3840 x 2160 (4K UHD)

439P1



## Master every task in a crisp view

The Philips USB-C docking display for comprehensive solution. View UltraClear 4K UHD and re-charge a laptop, all at the same time with a single USB-C cable. Integrated KVM switch and multiple connection for performance and convenience.

### Expand your viewing experience

- UltraClear 4K UHD (3840x2160) resolution for precision
- VA display delivers awesome images with wide viewing angles
- Ultra Wide-Color wider range of colors for a vivid picture
- DisplayHDR 400 for more lifelike and outstanding visuals

### Single cable USB-C connection

- Built in RJ-45 ethernet gives data security
- USB-C enables laptop power charging directly from a monitor

### Designed for the way you work

- MultiView 4K for 4 systems on one screen
- Tilt, swivel and height-adjust for an ideal viewing position
- Less eye fatigue with Flicker-free technology
- LowBlue Mode for easy on-the-eyes productivity
- EasyRead mode for a paper-like reading experience
- Built-in KVM switch to easily switch between sources

# Business Monitor

4K Ultra HD LCD display with MultiView

439P1/27


## Highlights

### USB Type-C connection



This Philips display features a built-in USB type-C docking station with power delivery. With intelligent and flexible power management, you can power charge your compatible\* laptop directly. Its slim, reversible USB-C connector allows for easy, one-cable docking. Simplify by connecting all your peripherals like keyboard, mouse and your RJ-45 Ethernet cable to the monitor's docking station. You can watch high resolution video and transfer data at a super-speed, while powering up and re-charging your notebook at the same time.

### UltraClear 4K UHD Resolution

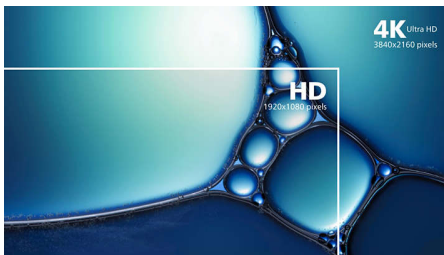

These Philips displays utilize high performance panels to deliver UltraClear, 4K UHD (3840 x 2160) resolution images. Whether you are demanding professional requiring extremely detailed images for CAD solutions, using 3D graphics applications or a financial wizard working on huge spreadsheets, Philips displays will make your images and graphics come alive.

### DisplayHDR 400



VESA-certified DisplayHDR 400 delivers a significant step-up from normal SDR displays. Unlike, other 'HDR compatible' screens, true


DisplayHDR 400 produces astonishing brightness, contrast and colors. With global dimming and peak brightness up-to 400 nits, images come to life with notable highlights while featuring deeper, more nuanced blacks. It renders a fuller palette of rich new colors, delivering a visual experience that engages your senses.

### Ultra Wide-Color Technology



Ultra Wide-Color Technology delivers a wider spectrum of colors for a more brilliant picture. Ultra Wide-Color wider "color gamut" produces more natural-looking greens, vivid reds and deeper blues. Bring, media entertainment, images, and even productivity more alive and vivid colors from Ultra Wide-Color Technology.

### MultiView technology for 4K

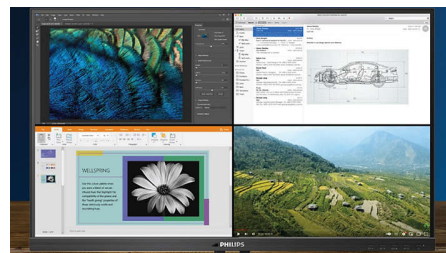

Philips MultiView feature on this expansive 4K UHD display enables you to have up to four systems each shown in Full HD on one screen. You can use the Picture-by-Picture (PbP) for monitoring four systems on one screen for control rooms or security. Or for multiple devices like two notebooks side-by-side simultaneously, making collaboration more productive. Or Picture-in-Picture mode (PiP) watching a live football feed from your set-top box, while working on your PC.

### MultiClient Integrated KVM




With MultiClient Integrated KVM switch, you can control two separate PCs with one monitor-keyboard-mouse set up. A convenient button allows you to quickly switch between sources. Handy with set-ups that require dual PC computing power or sharing one large monitor to show two different PCs.

### Flicker-free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-free Technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

### LowBlue Mode

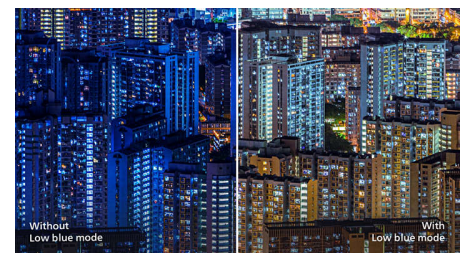

Studies have shown that just as ultra-violet rays can cause eye damage, shortwave length blue light rays from LED displays can cause eye damage and affect vision over time. Developed for wellbeing, Philips LowBlue Mode setting uses a smart software technology to reduce harmful shortwave blue light.

**4K**  
Ultra HD

VESA CERTIFIED  
DisplayHDR 400

  
Ultra Wide Color

  
MultiClient  
Integrated KVM

  
Flicker-free

  
LowBlue Mode

  
EasyRead

  
CompactErgo  
Base


# Business Monitor

4K Ultra HD LCD display with MultiView

439P1/27


## Highlights

### EasyRead mode

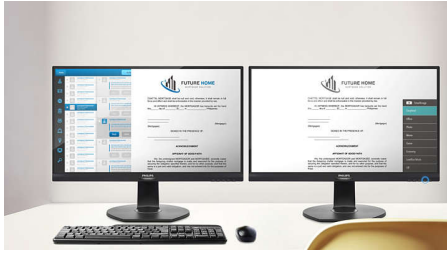


EasyRead mode for a paper-like reading experience

### Compact Ergo Base

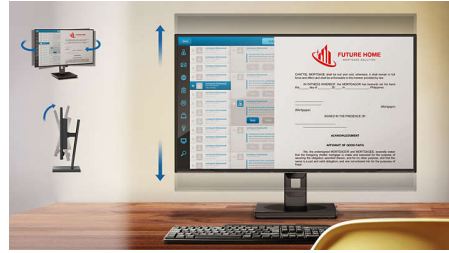

The Compact Ergo Base is a people-friendly Philips monitor base that tilts, swivels and height-adjusts so each user can position the monitor for maximum viewing comfort and efficiency.

### VA display

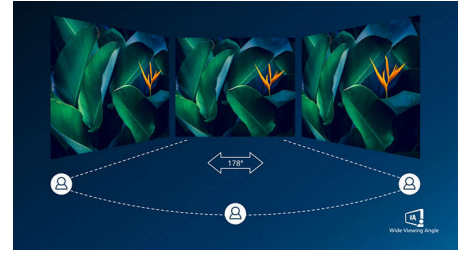

Philips VA LED display uses an advanced multi-domain vertical alignment technology which gives you super-high static contrast ratios for extra vivid and bright images. While standard office applications are handled with ease, it is especially suitable for photos, web-browsing, movies, gaming, and demanding graphical applications. It's optimized pixel management technology gives you 178/178 degree extra wide viewing angle, resulting in crisp images.

Specifications

Picture/Display

Panel Size: 42.51 inch / 108 cm  
Aspect ratio: 16:9  
LCD panel type: VA LCD  
Backlight type: W-LED system  
Pixel pitch: 0.2451 x 0.2451 mm  
Brightness: 400 cd/m<sup>2</sup>  
Display colors: Color support 1.07 billion colors  
Color gamut (typical): NTSC 105%\*, sRGB 126%\*, Adobe RGB 90%\*  
Contrast ratio (typical): 4000:1  
SmartContrast: 50,000,000:1  
Response time (typical): 4 ms (Gray to Gray)\*  
Viewing angle: 178° (H) / 178° (V), @ C/R > 10  
Picture enhancement: SmartImage  
Maximum resolution: HDMI 1.4: 3840 x 2160 @ 30 Hz; HDMI 2.0 / DP / USB-C: 3840 x 2160 @ 60 Hz  
Effective viewing area: 941.184 (H) x 529.416 (V) mm  
Scanning Frequency: 30 - 140 kHz (H) / 48 - 60 Hz (V)  
sRGB  
Delta E: < 2 (sRGB)  
Flicker-free  
Pixel Density: 103.64 PPI  
LowBlue Mode  
Display Screen Coating: Anti-Glare, 3H, Haze 25%  
SmartUniformity: 93 ~ 105%

EasyRead  
Adaptive sync  
HDR: DisplayHDR 400 certified

Connectivity

Signal Input: DisplayPort 1.4 x 1, HDMI 2.0 x 2, HDMI 1.4 x 1, USB-C 3.2 Gen 2 x 1 (upstream, data, power delivery)  
Sync Input: Separate Sync  
Audio (In/Out): Headphone out  
RJ45: Ethernet LAN up to 1G\*, Wake on LAN  
RS232  
USB:: Upstream: USB-C x 1, USB-B x 1; Downstream: USB 3.2 x 3 (with 1 fast charge B.C 1.2), USB-C x 1 (for PD 15W only)  
HDCP: HDCP 1.4 (HDMI 1.4 / HDMI 2.0 / DP 1.4 / USB-C), HDCP 2.2 (HDMI 2.0 / DP 1.4 / USB-C)  
HBR3: USB-C

USB

Power delivery: USB PD version 3.0  
Super speed: Data and Video transfer  
DP: Built-in Display Port Alt mode  
USB-C max. power delivery: USB-C1: up to 90 W (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/4.5A), USB-C2: up to 15W (5V/3A)  
USB-C: Reversible plug connector

Convenience

Built-in Speakers: 5 W x 2  
Plug & Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 10 / 8.1 / 8 / 7  
User convenience: SmartImage, Input, User, Menu, Power On/Off  
OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian  
Other convenience: Kensington lock, VESA mount (200x200mm)  
Control software: SmartControl  
MultiView: PIP/PBP mode, 4x devices  
KVM: USB-C, USB-B

Stand

Height adjustment: 100 mm  
Swivel: -/+ 45 degree  
Tilt: -5 ~ 23 degree

Power

ECO mode: 43.9 W (typ.)  
Power supply: Built-in, 100-240VAC, 50-60Hz  
Off mode: Zero watts with Zero switch  
On mode: 46 W (typ.) (EnergyStar test method)  
Standby mode: 0.3 W (typ.)  
Power LED indicator: Operation - White, Standby mode- White (blinking)

# Specifications

## Dimensions

Packaging in mm (WxHxD): 1150 x 704 x 284 mm

Product without stand (mm): 978 x 573 x 78 mm

Packaging in inch (WxHxD): 45.3 x 27.7 x 11.2 inch

Product without stand in inch: 38.5 x 22.6 x 3.1 inch

Product with stand(max height): 978 x 713 x 281 mm

Product with stand(max height): 38.5 x 28.1 x 11.1 inch

## Weight

Product with packaging (kg): 23.30 kg

Product with stand (kg): 18.00 kg

Product with packaging (lb): 51.26 lb

Product with stand (lb): 39.60 lb

Product without stand (kg): 12.40 kg

Product without stand (lb): 27.28 lb

## Operating conditions

Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)

Temperature range (operation): 0°C to 40 °C

Relative humidity: 20%-80 %

Temperature range (storage): -20°C to 60 °C

MTBF (demonstrated): 70,000 hrs (excluded backlight)

## Sustainability

Environmental and energy: EnergyStar 8.0, RoHS

Post consumer recycled plastic: 85%

Recyclable packaging material: 100 %

Specific Substances: PVC / BFR free housing, Mercury free

## Compliance and standards

Regulatory Approvals: CB, TUV/GS, TUV Ergo, CU-EAC, EAEU RoHS, CE Mark, FCC Class B, ICES-003

## Cabinet

Finish: Texture

Foot: Black

Front bezel: Black

Rear cover: Black

## What's in the box?

Cables: HDMI cable, DP cable, USB-A to B cable, USB-C to C/A Y cable, Power cable

Monitor with stand

User Documentation

