PHILIPS

Q-Line Display

Signage Solutions

75"

Direct LED Backlight

Ultra HD

75BDL3550Q

Stand out

Easy-setup 18/7 display.

Inform and enthral with a Philips Q-Line Professional Ultra HD Display. This reliable solution can be up and running as quickly as you need.

Cost-effective system solution
- Integrated media player. Easily schedule USB content
- FailOver ensures that content is always playing
- Easy control. Remotely manage networked displays

Effortless setup. Total control.
- Operate, monitor and maintain with CMND and Control
- CMND and Create. Develop and launch your own content
- OPS slot allows for PC embedding without cabling

Smart and powerful
- Android SoC processor. Native and web apps
- Connect and control your content via the cloud

Superb picture. Ultra-high brightness.
- Ultra-HD. Rich images. Stunning contrast

Highlights

CMND and Control

Run your display network over a local (LAN) connection. CMND and Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

Integrated media player

Easily schedule content to play from USB. Your Philips Professional Display will wake from standby to play the content you want, and then return to standby once playback has finished.

FailOver

From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs, ensuring that content keeps playing even if the primary source goes down. Simply set a list of alternative inputs to be sure your business is always on.

OPS slot

Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

CMND and Create

Take control of your content with CMND and Create. A drag-and-drop interface makes it simple to publish your own content, whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure that your stills, text and video will be up and running in no time.

Powered by Android 8

Control your display via an Internet connection. Android-powered Philips Professional Displays are optimised for native Android apps and you can install web apps directly to the display too. A new Android 8 OS ensures the software is kept secure and stays up to date with the latest specification for longer.

SmartBrowser

Connect and control your content via the cloud with the integrated HTML5 browser. Using the Chromium-based browser, design your content online and connect either a single display or your complete network. Show content in both landscape and portrait mode, with fullHD resolution. Simply connect the display to the Internet using WiFi or with an RJ45 cable, and enjoy your own curated playlists.

SmartPower SmartPlayer ENERGY STAR SmartControl Clinical D-Image ULTRA RESOLUTION

Specifications

Picture/Display
Diagonal screen size (metric): 189.3 cm
Diagonal screen size (inch): 74.5 inch
Aspect ratio: 16:9
Panel resolution: 3840 x 2160
Pixel pitch: 0.4296 x 0.4296 mm
Optimum resolution: 3840 x 2160 @ 60 Hz
Brightness: 400 cd/m²
Display colours: 1.07 Billion
Contrast ratio (typical): 1200:1
Dynamic contrast ratio: 500,000:1
Response time (typical): 8 ms
Viewing angle (horizontal): 178 degree
Viewing angle (vertical): 178 degree
Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Progressive scan, 3D MA deinterlacing, Dynamic contrast enhancement
Panel technology: ADS
Operating system: Android 8.0
Clinical image: D-Image preset (dicom part 14 compatible)

Connectivity
Audio output: 3.5 mm jack
Video input: DVI-D (x 1), HDMI 2.0 (x 3), USB 2.0 (x 2), VGA (Analogue D-Sub) (x 1)
Audio input: 3.5 mm jack
Other connections: OPS
External control: RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack, RJ45

Convenience
Placement: Landscape (18/7), Portrait (18/7)
Tiled Matrix: Up to 15 x 15
Keyboard control: Hidden, Lockable
Remote control signal: Lockable
Signal loop through: RS232, IR Loop through
Ease of installation: Smart Insert
Energy-saving functions: Smart Power
Network controllable: RS232, RJ45
Start-up: Switch on delay, Switch on status, Boot on source
Start-up window: enable/disable Philips logo

Sound
Built-in speakers: 2 x 10 W RMS

Power
Mains power: 100–240 V~, 50/60 Hz
Consumption (Typical): 160 W
Consumption (Max): 310 W
Standby power consumption: <0.5 W
Power Saving Features: Smart Power
Energy Label Class: G

Supported Display Resolution
Computer formats: 1920 x 1080, 60 Hz, 1680 x 1050, 60 Hz, 1600 x 1200, 60 Hz, 1440 x 900, 60 Hz, 1280 x 1024, 60 Hz, 1280 x 800, 60 Hz, 1280 x 720, 60 Hz, 1152 x 870, 75 Hz, 1024 x 768, 60, 70, 75 Hz, 800 x 600, 56, 60, 72, 75 Hz, 720 x 400, 70 Hz, 640 x 480, 60, 67, 72, 75 Hz, 1152 x 864, 75 Hz, 832 x 624, 75 Hz
Video formats: 3840 x 2160, 60 Hz, 3840 x 2160, 30Hz, 576p, 50 Hz, 576i, 50 Hz, 480p, 60 Hz, 480i, 60 Hz, 1080p, 50, 60 Hz, 1080i, 50, 60 Hz, 720p, 50,60 Hz

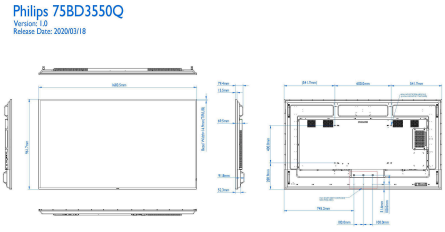

Dimensions
Set Width: 1683.5 mm
Product weight: 37.5 kg
Set Height: 961.7 mm
Set Depth: 69.5 mm(D@wall mount)/91.8 mm(D@handle) mm
Set Width (inch): 66.28 inch
Set Height (inch): 37.86 inch
Wall Mount: 600 x 400 mm, M8
Set Depth (inch): 2.74(@ wall mount)/3.61(@ handle) inch
Bezel width: 14.9 mm (Even bezel)
Product weight (lb): 82.67 lb

Operating conditions
Altitude: 0 ~ 3000 m
Temperature range (operation): 0 ~ 40 °C
MTBF: 30,000 hour(s)
Temperature range (storage): -20 ~ 60 °C
Humidity range (operation)[RH]: 20~80% RH (No condensation)
Humidity range (storage) [RH]: 5~95% RH (No condensation)

Multimedia Applications
USB Playback Video: MPEG, H.264, H.263, H.265
USB Playback Picture: BMP, JPEG, PNG
USB Playback Audio: AAC, HEAAC, MPEG

Internal Player
CPU: Dual core cortex A53 1.1 GHz, Dual core cortex A73 1.15 GHz
GPU: ARM Mali G51
Memory: 2 GB DDR3, 8 GB

Accessories
Included accessories: AC Power Cord, RS232 cable, Remote Control, Batteries for remote control, Quick start guide
Included Accessories: IR sensor cable (1.8 m) (x 1), RS232 daisy-chain cable, M3 screw (X 1), M4 Screw (x 1), Philips logo (x 1), USB Cover (x 1)

Miscellaneous
On-Screen Display Languages: Simplified Chinese, Traditional Chinese, English, French, German, Italian, Polish, Russian, Spanish, Turkish, Japanese, Arabic
Warranty: 3 year warranty
Regulatory approvals: CE, CB, BSMI, CU, EPA, ETL, FCC, Class A, PSB, VCCI

© 2025 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

Issue date 2025-12-12
Version: 7.0.2

EAN: 87 12581 76547 7

www.philips.com