PHILIPS

Push pull smart door lock

1000 series

- Intuitive push-pull use
- System wake-up by manual touch
- Auto Locking Function

DDL111LAFGB

Wonderful life starts from a

Full automatic: more safety, more freedom

With simplicity brought by speedy unlock and auto lock and safety ensured by dual verification and super B-grade lock cylinder, Alpha is a solid choice for a smart life. The ergonomic design even makes it a pleasure to push the door open.

Extraordinary design brings outstanding experience

- Smooth and wearable, always like new

Easy life doesn't stop there

- Enjoy the reassurance with each close
- Protect home security at all time
- Unlock swiftly at one go
- Unlock and open the door at one go

Multiple protection in one for overall home safety

- Protect your PIN security in real time
- Security is never forgotten
- Instant alarm upon inside unloc
- No more safety risks, be reassured while away
- Higher reliability and security

Highlights

Auto locking

Philips Alpha-5HB employs full automatic mortise. Without the need for any extra action, the deadbolt will spontaneously pop out after you close the door. If the door is not locked properly, the mortise will give an alarm to remind you of the door lock status.

Class C lock cylinder

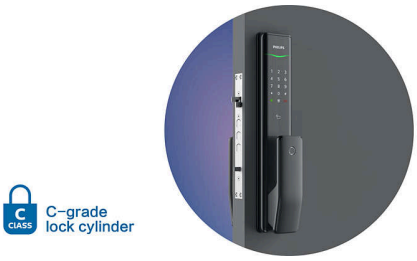

Lock cylinder is the key component that controls the opening of the lock and is compared to the heart of a lock. Class C lock cylinder employs multiple antitheft technologies with unique design of the pin tumbler and vane structure, and is able to give high performance on preventing technical lockpicking.

Dual verification unlocking

In dual verification mode, you can use a combination of any two access methods among fingerprint, PIN code and key tag to ensure double-layer security for your home.

Hidden PIN code

Philips Alpha-5HB comes with the feature of Hidden PIN Code technology which allows you to enter random number combinations to successfully get identified as long as there is consecutive input of the real PIN code. This feature can effectively prevent peeping and safeguard your real PIN code.

IML brushed finishing

The IML brushed surface has the hardness higher than 2H. Besides, it's waterproof, moisture proof and can keep fingerprint residue out.

Intuitive fingerprinting

The fingerprint sensor is integrated in the push-pull handle so that when you hold the handle, your finger will naturally fall on the snesor. You can simply reach out and touch the sensor, then push to open after a successful fingerprint verification. The one-step unlocking will definately bring you a fast and convenient door opening experience.

Multiple alerts

Philips Alpha-5HB is featured with all-around alerts，which not only improves the anti-theft level of your home, safeguard you and your family in real time, but also reminds you of the door lock status for better convenience.

1000 series

Push pull smart door lock

DDL111LAFGB/97

Highlights

One-key outside forced lock

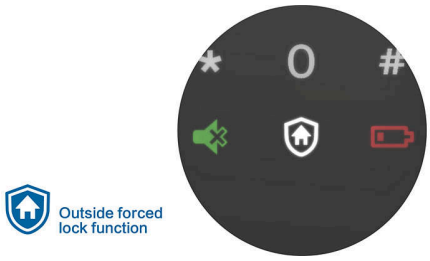

Before leaving home, you can touch the outside forced lock key to enable the function. In this mode, opening the door from inside the room will trigger an alert. This feature can effectively warn you of security risks and upgrade the level of home security.

Patented full auto mortise

The upgraded full automatic mortise makes it possible for instant unlocking right after a successful verification. Once you are recognized, you can directly push or pull the handle to open the door, which greatly simplifies the use of your door lock and brings you a fast and convenient in and out experience.

Safe handle switch

You can enable the safe handle function before you leave home. After the door is locked, the indoor handle will be fixed to ensure that nobody could open the door by pushing the indoor handle. This feature can effectively prevent unlocking from indoor, thus eliminating security risks and improves anti-theft performance.

1000 series

Push pull smart door lock

DDL111LAFGB/97

Specifications

Design & Appearance

Color: Champagne gold
Handle: Push-pull handle
Main Material: Zinc alloy and aluminium alloy
Surface Processing: Electroplating
Fingerprint Sensor: Semiconductor
Emergency Escape Design: Indoor fast opening mortise
Ergonomic Design: Push-pull handle design

Access Solution

Fingerprint
Password/PIN Code
Card/Key Tag
Mechanical Key
Bluetooth

Lock Capacity

Fingerprint: Up to 100
Card/Key Tag: Up to 100
Master PIN Code: 1
User PIN Code: Up to 10
One-time PIN Code: 1

Power Specification

Power Supply: 4 AA batteries
Battery Type: Alkaline Batteries
Time of Use: 10 months*
Maximum Batteries Capacity: 8 batteries
Emergency Power Supply: 5V power bank
Working Voltage: 4.5-6V

Easy Operation

Indicator: Door locks status prompt, Low battery prompt, Mute status prompt, Outside forced lock prompt, System locking prompt
Voice Guide: Human voice guide

Smart Lock Functions

Mortise: Full auto mortise, Hidden C-grade lock cylinder
Locking Function: Indoor deadlock, System locking
Safety Function: Dual verification, Fake PIN code, Outside forced lock function, Safe handle funtion
Alarm Function: Anti-dismantle alarm, Outside forced lock alarm

Mode

Operationg Mode: Auto mode, Manual mode
System Setup Mode: Dual verification mode, Normal mode

Installation

Door Thickness: 38-60 mm, 60-90 mm, 90-120 mm, Other range*
Door Opening Direction: Left inward opening, Left outward opening, Right inward opening, Right outward oepning
Door Type: Antitheft door, Copper door, Wooden door
Multi-lock Point: No

Accessory Parts

Accessorial Battery: 4 AA alkaline batteries
Mechanical Key: 2 keys
Smart Key Tag: 2 cards
Installation Accessories
Mortise
Mounting Plate
Drilling Template
Certificate
Cleaning Pad
User Manual
Warranty Card
Quick Start Guide

© 2026 Koninklijke Philips N.V.
All Rights reserved.

Issue date 2026-09-21
Version: 2.0.1

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

EAN: 69 71318 50039 8

www.philips.com

* May be less depending on the actual usage.
* Please contact our service agents or authorized dealers for other door range.