PHILIPS

Wiring harness for 2 LED lamps

Ultinon Drive Accessory

- 2-pin female DT connector plug
- Include relay, switch, fuses
- Reliable Philips quality

LUMUD1006WX1

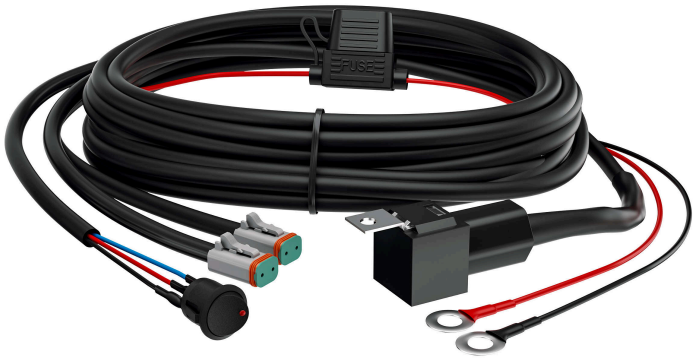

Enhanced durability and reliability

Reliable installation for long-lasting performance

Ensure smooth installation of a single Philips LED driving light, with automotive-grade cables and waterproof sealed components, for long-lasting LED light performance. Being RoHS-compliant**, this kit is gentler on the environment.

Optimal fit

- Easy to install
- For two LED lamps

Reliable Philips automotive quality

- Durable material for long-lasting performance

Ultinon Drive Accessory

Wiring harness for 2 LED lamps

LUMUD1006WX1/10

Specifications

Electrical characteristics
Voltage: 12 V

Ordering information
GOC: 02438132
Order entry: UD1006WX1

Outer pack information
Gross weight per carton: 8000 g
Width (cm): 28
Height (cm): 26
Length (cm): 37.2

Packaging Data
EAN1: 8719018024381
EAN3: 8719018024398

Packed product information
box dimensions – L (mm): 88
box dimensions – W (mm): 60
box dimensions – H (mm): 354
Gross weight box: 610 g
MOQ (for professionals): 12
Pack Quantity: 1

Product description
Cable length: 3 m
Compatible with: UD5001L, UD5002L, UD5003L, UD5004L, UD5002C, UD5003C, UD2001R, UD2002R
Fuse: 15 A, 25 A, 30 A
Number of connector plugs: 2
Parking position light wired: No
Plug type: 2-pin DT connector female plug
Relay: Yes, 12 V
Switch On/Off
Technology: LED

© 2025 Koninklijke Philips N.V.
All Rights reserved.

Issue date 2025-05-14
Version: 2.2.1

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

EAN: 87 19018 02438 1

www.philips.com

* *Compatible with: Philips Ultinon Drive UD5001LX1, UD5002LX1, UD5003LX1, UD5004LX1, UD5002CX1, UD5003CX1, UD2001R, UD2002R
* **Free from Polyvinyl Chloride (PVC) and Brominated Flame Retardants (BFRs)