Always there to help you

Register your product and get support at www.philips.com/welcome



CE139DR



User manual



Contents

1	Safety	2
2	Your car audio system	3 3 3 4
	Introduction	3
	What's in the box	3
	Overview of the system	4
3	Install the car audio system	6
	Connect wires	7
	Mount into the dashboard	8
	Attach the front panel	9
4	Get started	10
	For the first time use	10
	Set the time format	10
	Set the clock	11
	Select a source	11
	Select a listening zone	11
	Mute the button beep	11
5	Listen to FM/MW radio stations	12
	Switch to FM/MW radio mode	12
	Select a tuner region	12
	Select a tuner sensitivity	12
	Search for a radio station	12
	Store radio stations in memory	12
	Play with RDS	13
6	Listen to DAB radio stations	15
	Switch to DAB mode	15
	Scan for on-air stations	15
	Program radio stations	15
	Display DAB information	16
	Set up for weak reception	16
	Use the DRC (Dynamic Range Control)	16
	Disable the DAB reception	16
	Reset the DAB tuner	17
	Remove invalid stations	17
	Check the current version of DAB	17
	firmware	17

7	Play from a storage device	17
	Control play	18
	Switch tracks	18
8	Play from an iPod/iPhone	19
	Compatible iPod/iPhone models	19
	Connect your iPod/iPhone	19
	Control play	19
	Charge your iPod/iPhone	20
9	Listen to an external player	20
10	Adjust sound	21
11	Additional information	21
	Reset the system	21
	Replace the fuse	21
	Upgrade the firmware	22
12	Product information	23
13	Troubleshooting	24
14	Notice	25
	Care of the environment	25
	Trademark notice	25

1 Safety

Read and understand all instructions before you use this device. If damage is caused by failure to follow instructions, the warranty does not apply.

- Modification of the product could result in hazardous radiation of EMC or other unsafe operation.
- The device is designed for negative ground (earth) 12 V DC operation only.
- To ensure safe driving, adjust the volume to a safe and comfortable level.
- Improper fuses can cause damage or fire. When you need to change the fuse, consult a professional.
- Use only the supplied mounting hardware for a safe and secure installation.
- To avoid short circuits, do not expose the device to rain or water.
- The device shall not be exposed to dripping or splashing.
- Do not place any sources of danger on the device (e.g. liquid filled objects, lighted candles).
- Never insert objects into the ventilation slots or other openings on the device.
- Clean the device with soft, damp cloth. Never use substances such as alcohol, chemicals or household cleaners on the device.

Your car audio system

Congratulations on your purchase, and welcome to Philips! To fully benefit from the support that Philips offers, register your product at www.philips.com/welcome.

Introduction

With this system, you can:

- enjoy audio from a USB storage device, SD/SDHC card, iPod/iPhone, and external player,
- · charge your iPod/iPhone, and
- listen to radio stations.

You can enrich sound output with these sound effects:

- Dynamic bass boost (DBB)
- Digital sound control (DSC)

Playable media:

- USB storage device
 - Compatibility: USB 2.0, USB 1.1
 - Class support: MSC (Mass Storage Class)
 - Maximum capacity: 32 GB
- SD/SDHC card

bitrates

- Maximum capacity: 32 GB
- Files
 - File system: FAT16, FAT32
 - Maximum number of folders: 99
 - Maximum number of tracks/files: 999
 - Maximum level of directory: 8
 - .mp3 files
 Sampling frequencies: 32 kHz, 44.1 kHz, 48 kHz
 Bitrates: 8-320 kbps and variable

- .wma files
 Versions:V4,V7,V8,V9 (L1 and L2)
 Sampling frequencies: 44.1 kHz, 48 kHz
 Bitrates: 64-192 kbps and variable
 bitrates
- ID3 tag V2.0 or later
- Unsupported files:


 AAC, WAV, and PCM files

 DRM protected WMA files (.wav, .m4a, .m4p, .mp4, and .aac)

 WMA files in lossless format


What's in the box


Check and identify the contents of the package:



- 1 Main unit (with a sleeve)
- 2 Carrying case (with front panel included)
- 3 Trim plate
- 4 Disassembly tool X 2
- 5 ISO male connector X 2
- (6) User manual

Overview of the system

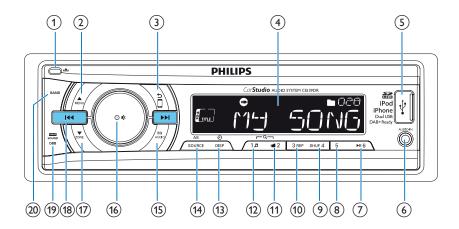

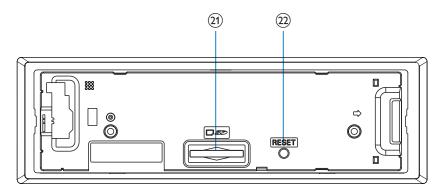

(1)

• Unlock the front panel.

2 MENU

- For .wma and .mp3 tracks, press to select the previous folder.
- In DAB mode, press to access the DAB menu.
- Press and hold to access the system menu.
- Press to select a tuner band.

3

- Return to the previous menu.
- For iPod/iPhone, press repeatedly to select a control mode: control play on the iPod/iPhone or on this system.

4 LCD screen

- (5)
 - Connect to a USB storage device.
 - Connect to a compatible iPod/iPhone.

6 AUDIO-IN

 Connect to the audio output socket (usually the headphone socket) of an external device.

(7) ►II 6

- Start, pause, or resume the play of tracks
- In FM/MW radio mode, press to select the preset radio station of No. 6.
- In FM/MW radio mode, press and hold to store the current radio station at channel No. 6.

8 5

- In FM/MW radio mode, press to select the preset radio station of No. 5.
- In FM/MW radio mode, press and hold to store the current radio station at channel No 5

9 SHUF 4

- In FM/MW radio mode, press to select the preset radio station of No. 4.
- In FM/MW radio mode, press and hold to store the current radio station at channel No. 4.
- For .wma and .mp3 tracks, press repeatedly to select a play mode: play all tracks randomly ([SHUFFLE ALL]), play tracks in the current folder or album randomly ([SHUFFLE FLD]/[SHUFFLE ALB]), or play all tracks in the storage device in sequence ([SHUFFLE OFF]).

(10) 3 REP

- In FM/MW radio mode, press to select the preset radio station of No. 3.
- In FM/MW radio mode, press and hold to store the current radio station at channel No. 3.
- For .wma and .mp3 tracks, press repeatedly to select a repeat mode.

11) 🚅 2

• In FM/MW radio mode, press to select the preset radio station of No. 2.

- In FM/MW radio mode, press and hold to store the current radio station at channel No. 2.
- For .wma and .mp3 tracks on a storage device, press to access the folder list.

① 1**刀**

- In FM/MW radio mode, press to select the preset radio station of No. 1.
- In FM/MW radio mode, press and hold to store the current radio station at channel No. 1.
- For .wma and .mp3 tracks on a storage device, press to access the track list.
- Press to access the music menu of an iPod/iPhone.

(13) (1) /DISP

- Press repeatedly to display available information about the current track,
- Press repeatedly to display available information that is transmitted by a DAB/RDS radio station.
- Press and hold to display the set clock.

(14) AS/SOURCE

- Press repeatedly to select a source.
- In FM/MW radio mode, press and hold to activate the automatic search of radio stations.

15 EQ AUDIO

- Press repeatedly to select a preset sound equalizer.
- Press and hold to activate the setup of bass, treble, balance, and fader.

(16) (1) 🕸

- Press to turn on the system.
- Press and hold to turn off the system.
- Press to mute the speakers or release them from mute status.
- Press to confirm an option.
- Rotate to switch between menu options.
- Rotate to adjust the volume level.



- For .wma and .mp3 tracks on a storage device, press to select the next folder.
- In DAB mode, press and hold to access the list of radio stations.
- In a mode other than DAB mode, press and hold to activate the selection of listening zones.
- Press to select a tuner band.

(18) |◀◀ / ▶▶|

- Tune to a radio station.
- Press to skip to the previous/next track,
- Press and hold to rewind a track or search fast forward.



- Press to enable or disable the MAX Sound feature.
- Press and hold to enable or disable the DBB (dynamic bass boost) sound effect.

20 BAND

Press repeatedly to select a tuner band.

(21) **5**

Insert an SD/SDHC card.

22 RESET

• Press to reset the system.

3 Install the car audio system



Caution

• Use the controls only as stated in this user manual.

Always follow the instructions in this chapter in sequence.

These instructions are for a typical installation. However, if your car has different requirements, make the adjustment accordingly. If you have any question regarding installation kits, consult your local retailer:



Note


- This system is designed for negative ground (earth) 12V DC operation only.
- Always install this system in the car dashboard. Other locations can be dangerous as the rear of the system heats up during use.
- To avoid short-circuit: before you connect, make sure that the ignition is off.
- Make sure that you connect the yellow and red power supply leads after all other leads are connected.
- Make sure that all loose leads are insulated with electrical tape.
- Make sure that the leads do not get caught under screws iron parts that will move (e.g. seat rail).
- Make sure that all ground (earth) leads are run to a common ground (earth) point.
- Use only the supplied mounting hardware for a safe and secure installation.
- Improper fuses can cause damage or fire. When you need to change the fuse, consult a professional.
- When you connect other devices to this system, make sure that the rating of the car circuit is higher than the total fuse value of all the connected devices.
- Never connect speaker wires to the metal body or chassis of the car.
- Never connect speaker wires with stripes to one another.

Connect wires




Note

- Make sure that all loose leads are insulated with electrical tape.
- Consult a professional to connect wires as instructed below.
- 1 Check the car's wiring carefully and connect them to the the supplied ISO male connectors.



	ISO male connectors	Connect to
1	Green strip, black- edged green strip	Rear left speaker
2	White strip, black- edged white strip	Front left speaker
3	Gray strip, black- edged gray strip	Front right speaker
4	Purple strip, black- edged purple strip	Rear right speaker
е	Red strip	Ignition key +12V DC when ON/ACC
f	Blue strip	Motor/electric antenna relay control lead
g	White-edged blue strip	Amplifier relay control lead
h	Black strip	Ground
i	Yellow strip	To the +12V car battery which is energized at all times

2 Connect other wires if necessary.



	Sockets or	External sockets or
	connectors on rear	connectors
	panel	
1	USB connector	A USB storage device
		or iPod/iPhone
2	Purple strip	OE remote control
		module
3	FM/MW radio	FM/MW radio
	antenna socket	antenna
4	DAB radio receiver	DAB radio receiver
	socket	
5	REAR R	Rear right speaker
6	REAR L	Rear left speaker
7	For ISO male	ISO male connectors
	connectors	



Пр

 The pin arrangement for the ISO connectors depends on the type of your vehicle. To avoid damage to the unit, connect properly.


7

Connect the DAB radio receiver




Note

- The DAB radio receiver and DAB radio antenna are not bundled. Consult your local retailer for purchase.
- Make sure that no lead other than the DAB radio antenna contacts the antenna connector of the DAB radio receiver.
- Risk of injury: Never install the DAB radio receiver and its accessories on the airbag cover;
- Risk of overheating: Do not fix the DAB radio receiver to the metal surface of the main unit.
- Risk of electromagnetic interference: Do not install the DAB radio receiver over any sensors or vents.
- Risk of short circuit, malfunction, or damage to this product: Do not alter the cable of DAB radio receiver or dismantle the receiver box.
- Risk of damage to the DAB radio receiver: Never pull its cable when you remove it.




- 1 Connect the DAB radio receiver to the main unit.
- 2 Connect a DAB radio antenna to the DAB radio receiver.

3 Secure the DAB radio receiver to your car.




Mount into the dashboard


- If the car does not have an on-board drive or navigation computer, disconnect the negative terminal of the car battery.
- If the car battery is not disconnected, to avoid short-circuit, make sure that the bare wires do not touch each other.
- 1 Make sure that the car dashboard opening is within these measurements:




2 Remove the mounting sleeve with the supplied disassembly tools.




Install the sleeve into the dashboard and bend the tabs outward to fix the sleeve.



4 Slide the unit into the sleeve until you hear a "click".




5 Attach the trim plate.




6 Reconnect the negative terminal of the car battery.

Attach the front panel

1 Insert the notch on the front panel to the chassis on the main unit.



Press the left end of the front panel inwards until it is securely locked with a "click".




Detach the front panel



Note

- Before you insert an SD/SDHC card or reset the system, detach the front panel.
- Before you detach the front panel, make sure that the system is turned off.
- 1 Press **\(\Delta\)** to release the front panel.
- 2 Pull the front panel outwards to remove it.



4 Get started

For the first time use

- 1 Press to turn on the system.
 - ☐ [PHILIPS] is displayed and then [SELECT OPERATING REGION] (select a radio region) scrolls.
- When one of the following options is displayed, rotate ① ❖ to select a radio region that matches your location.
 - [AREA EUROPE] (Western Europe)
 - [AREA ASIA] (Asia Pacific)
 - [AREA M--EAST] (Middle East)
 - [AREA AUST] (Australia)
 - [AREA RUSSIA] (Russia)
 - [AREA USA] (United States)
 - [AREA LATIN] (Latin America)
 - [AREA JAPAN] (Japan)
- 3 Press to confirm.
 - → If a DAB radio receiver is correctly connected, the system switches the source to [DAB/DAB+] automatically.
 - → If no DAB radio receiver is connected, the system switches the source to [RADIO] automatically.
 - To turn off the system, press and hold
 ♥ until the screen backlight is off.

Set the time format

- 1 Press and hold MENU to access the system menu.
- Press MENU / ZONE repeatedly until [CLOCK 24H] or [CLOCK 12H] is displayed.
- 3 Rotate ① ♠ to select [CLOCK 24H] or [CLOCK 12H].
 - [CLOCK 24H]: 24-hour time format
 - [CLOCK 12H]: 12-hour time format

Set the clock

- 1 Press and hold AENU to access the system menu.
- Press ♠ / ZONE repeatedly until [CLOCK] is displayed with time digits blinking.
- 3 Rotate **❖** anti-clockwise to set the hour.
- 4 Rotate **○** ❖ clockwise to set the minute.



 The system can automatically synchronize its clock with an RDS station that transmits time signals (see 'Synchronize the system clock' on page 14).

Display the clock

Press and hold \bigoplus /DISP until [CLOCK] and the set clock are displayed.

 To exit the clock display, press any button or rotate ○ .

Select a source

Press **AS/SOURCE** repeatedly to select a source.

- [DAB/DAB+]: When a DAB radio receiver is connected, you can select this source to listen to DAB radio stations.
- [RADIO]: Listen to FM/MW radio.
- [FRONT USB]/[REAR USB]: When a USB storage device or compatible iPod/iPhone is connected and recognized, you can select this source to play audio files that are stored on it.
- [SD/SDHC]: When an SD/SDHC card is inserted and recognized, you can select this source to play audio files that are stored on it.
- [AUX IN]: Listen to the audio that is transferred through the AUDIO-IN socket.

Select a listening zone

- 1 Press and hold ZONE until one of the following options is displayed.
 - [ALL]: For all passengers
 - [FRONT-L]: For the front-left seat only
 - **[FRONT-R]**: For the front-right seat only
 - **[FRONT]**: For front passengers only
- Press MENU / ZONE repeatedly to select a listening zone.

Mute the button beep

The beep sound of buttons is enabled by default.

- 1 Press and hold MENU to access the system menu.
- Press MENU / ZONE repeatedly until [BEEP ON] or [BEEP OFF] is displayed.
 - [BEEP ON]: Enable the beep sound of buttons.
 - [BEEP OFF]: Mute the beep sound of buttons.
- 3 Rotate to change the setting.

5 Listen to FM/ MW radio stations

Switch to FM/MW radio mode

- 1 Press AS/SOURCE repeatedly to switch the source to [RADIO].
- Press Menu / Zone repeatedly to select a band: FM1, FM2, FM3, MW1, or MW2.

Select a tuner region

You can select a radio region that matches your location.

- 1 Press and hold AENU to access the system menu.
- Press MENU / ZONE repeatedly until one of the following options is displayed.
 - [AREA EUROPE] (Western Europe)
 - [AREA ASIA] (Asia Pacific)
 - [AREA M--EAST] (Middle East)
 - [AREA AUST] (Australia)
 - [AREA RUSSIA] (Russia)
 - [AREA USA] (United States)
 - [AREA LATIN] (Latin America)
 - [AREA JAPAN] (Japan)
- 3 Rotate **♦** to select a region.

Select a tuner sensitivity

To search for radio stations with strong signals only or more radio stations, you can change the tuner sensitivity.

- 1 Press and hold MENU to access the system menu.
- Press MENU / ZONE repeatedly until [LOCAL ON] or [LOCAL OFF] is displayed.
- 3 Rotate **⊙ ♦** to select a setting.
 - **[LOCAL ON]**: Search for radio stations with strong signals only.
 - **[LOCAL OFF]**: Search for radio stations with strong and weak signals.

Search for a radio station

Search for a radio station automatically

Press or let or let or search for the previous or next radio station with strong signals.

Search for a radio station manually

- 1 Press and hold \blacktriangleleft or $\blacktriangleright \blacktriangleright$ until the frequency digits start change.
- 2 Press I◀◀ or ▶▶ repeatedly until the target frequency is displayed.

Store radio stations in memory



You can store a maximum of six stations in each band.

Store radio stations automatically

- 1 Press MENU Or ZONE repeatedly to select a band.
- Press and hold AS/SOURCE until [STORE---] is displayed.
 - After the search is complete, the first stored radio station is broadcast automatically.

Store radio stations manually

- 1 Press BAND, MENU, or ZONE repeatedly to select a tuner band.
- 2 Tune to the radio station that you want to
- Press and hold 1 ☐, 1 2, 3 REP, SHUF 4, 5, or 16 to store the radio station at the selected channel.
 - To select a stored radio station, press
 1 □, 1 = 2, 3 REP, SHUF 4, 5, or ► 16.

Play with RDS

The RDS (Radio Data System) function operates only in areas with FM stations broadcasting RDS signals. If you tune to an RDS station, the station name is displayed.

Enable the RDS function



Note

- The RDS function is enabled by default.
- Only when the RDS function is enabled, RDS related settings can be accessed.
- 1 Press and hold MENU to access the system menu.
- Press Annu / ZONE repeatedly until [RDS ON] or [RDS OFF] is displayed.

- 3 Rotate **♦** to select **[RDS ON]**.
 - → The RDS function is enabled.

Select a program type

Before tuning to RDS stations, you can select a program type to search for programs of the selected category only.

- 1 Press and hold AENU to access the system menu
- Press AENU / ZONE repeatedly until [PTY] is displayed.
- 3 Press to access the list of program types.
- 4 Rotate ♥ to select a program type, and then press ♥ to confirm.

ltem	Program	Description
	type	
1	NEWS	News services
2	AFFAIRS	Politics and current
		affairs
3	INFO	Special information
		programs
4	SPORT	Sports
5	EDUCATE	Education and advanced
		training
6	DRAMA	Radio plays and
		literature
7	CULTURE	Culture, religion and
		society
8	SCIENCE	Science
9	VARIED	Entertainment programs
10	POP M	Pop music
11	ROCK M	Rock music
12	EASY M	Light music
13	LIGHT M	Light classical music
14	CLASSICS	Classical music
15	OTHER M	Special music programs
16	WEATHER	Weather
17	FINANCE	Finance

ltem	Program	Description
	type	
18	CHILDREN	Children's programs
19	SOCIAL	Social Affairs
20	RELIGION	Religion
21	PHONE IN	Phone In
22	TRAVEL	Travel
23	LEISURE	Leisure
24	JAZZ	Jazz Music
25	COUNTRY	Country Music
26	NATION M	National Music
27	OLDIES	Oldies Music
28	FOLK M	Folk Music
29	DOCUMENT	Documentary
30	TEST	Alarm Test
31	ALARM	Alarm

Use alternate frequencies

If the signal of an RDS station is poor, enable the AF (Alternate Frequency) function to search for another station that broadcasts the same program.

- 1 Press and hold MENU to access the system menu.
- 2 Press MENU / ZONE repeatedly until [AF ON] or [AF OFF] is displayed.
- 3 Rotate to select a setting.
 - [AF ON]: Enable the AF function.
 - **[AF OFF]**: Disable the AF function.

Set the region for AF tuning

You can set the region for AF tuning.

- 1 Press and hold MENU to access the system menu.
- Press MENU / ZONE repeatedly until [REGION ON] or [REGION OFF] is displayed.
- **3** Rotate to select a setting.
 - [REGION ON]: Only RDS stations in current region can be tuned to automatically.
 - [REGION OFF]: All RDS stations can be tuned to automatically.

Receive traffic announcement

If you want to receive traffic announcement, enable the TA (Traffic Announcement) function.

- 1 Press and hold ALENU to access the system menu.
- Press MENU / ZONE repeatedly until [TA ON] or [TA OFF] is displayed.
- 3 Rotate to select a setting.
 - [TA ON]: When a traffic announcement is on air, the system automatically switches to the tuner mode and begins to broadcast the traffic announcement. When the traffic announcement is over, the system returns to the previous mode.
 - **[TA OFF]**:Traffic announcement does not cut in.



• When a traffic announcement cuts in, you can press to switch the system to the previous mode.

Synchronize the system clock

You can synchronize the system clock with an RDS station that transmits time signals.

- 1 Press and hold MENU to access the system menu.
- Press MENU / ZONE repeatedly until [CT ON] or [CT OFF] is displayed.
- **3** Rotate **⊙ ♦** to select a setting.
 - [CT ON]: Synchronize the system clock with the RDS station automatically.
 - [CT OFF]: The automatic clock synchronization with RDS station is disabled.



 The accuracy of time depends on the RDS station that transmits time signals.

6 Listen to DAB radio stations



Note

- Make sure that the DAB radio receiver is securely connected
- For optimal reception, securely connect a DAB radio antenna to the DAB radio receiver and extend it.
- Check with local retailer or go to www.WorldDAB.org for applicable DAB radio frequencies in your area.

Switch to DAB mode

- 1 Press AS/SOURCE repeatedly to switch the source to [DAB/DAB+].
- Press ADN / ZONE repeatedly to select a band: DAB1, DAB2, or DAB3.

Scan for on-air stations



lote

- The operation does not replace the stations that are programmed in each band.
- 1 Press and hold AENU to access the system menu.
 - → [DAB SCAN] is displayed.
- 2 Press **♦**.
 - → [SCANNING] is displayed.
 - → The product starts scanning for on-air DAB radio stations.
 - → The detected stations are saved in the flash memory.

Tune to a detected station

- 1 Press to exit the system menu.
- Press again to access the list of detected stations.
 - → **Q** is displayed.
- 3 Press I ✓ ✓ / ► ► I repeatedly or rotate
 ⊙ ♦ until the name of the target station is displayed.
- 4 Press **⊙ ♦** to start listening.

Program radio stations

You can assign a sequence number to a detected station. Afterwards, you can quickly tune to it by pressing the corresponding numeric button on the main unit.



Note

- Before the programming, make sure that the scanning is complete.
- You can store a maximum of six stations in each band.

Program stations automatically

- Press and hold here to access the system menu.
 - → [DAB SCAN] is displayed.
- Press MENU / ZONE repeatedly until [DAB STORE] is displayed.
- **3** Press **⊙ ♦**.
 - → [STORING] is displayed.
 - → The product starts programming DAB radio stations automatically.
 - → Earlier programmed stations are replaced with the latest ones.
 - → After the programming is complete, the first programmed station is broadcast.

To tune to a programmed radio station, press its corresponding numeric button 1 J, 1 2, 3 REP, SHUF 4. 5. or ► 11 6.

Program stations manually

- Tune to the target detected station (see 'Tune to a detected station' on page 15).
- Press MENU / ZONE repeatedly to select a band.
- Press and hold a numeric button 1 7. 1 2, 3 REP, SHUF 4, 5, or ►II 6 to assign a sequence number to the station.
 - → [SAVED] is displayed.
 - → The station is programmed with the sequence number.
- Repeat the steps above to program more stations.
 - To tune to a programmed radio station, press its corresponding numeric button 1 J, 1 2, 3 REP, SHUF 4. 5. or ►11 6.

Display DAB information

The name of current DAB station is displayed. You can also view the other information. To cycle through available information, press **DISP** repeatedly.

- Dynamic label segment (DLS)
- Signal strength
- Program type (PTY)
- Ensemble name
- Frequency
- Signal error rate
- Bitrate codec
- Time
- Date

Set up for weak reception

When the current reception gets poor, the product can automatically switch the source or mute the speakers according to your setup.

- Press and hold MENU to access the system menu.
 - → [DAB SCAN] is displayed.
- Press MENU / ZONE repeatedly until [DAB WEAK] scrolls.
- Rotate O 🕏 to select an option, and then press • to confirm.
 - [WEAK MUTE]: Mute the speakers
 - [WEAK TO FM]: Switch the source to an FM radio station with strong reception that broadcasts the same program

Use the DRC (Dynamic Range Control)

DRC adds or removes a degree of compensation for the differences in the dynamic range between radio stations.

- Press and hold to access the system menu. → [DAB SCAN] is displayed.
- Press A / ZONE repeatedly until one of the following options is displayed.
 - [DRC OFF]: No compensation applied.
 - [DRC LOW]: Medium compensation applied.
 - [DRC HIGH]: Maximum compensation applied.
- Rotate \$\psi\$ to select an option.

Disable the DAB reception

- Press and hold MENU to access the system menu.
 - → [DAB SCAN] is displayed.
- Press MENU / ZONE repeatedly until [ANTENNA OFF] or [ANTENNA 12V] is displayed.

- 3 Rotate ❖ to select an option, and then press ❖ to confirm.
 - [ANTENNA OFF]: Disable the DAB reception.
 - [ANTENNA 12V]: Enable the DAB reception.

Reset the DAB tuner

- 1 Press and hold MENU to access the system menu.
 - → [DAB SCAN] is displayed.
- Press MENU / ZONE repeatedly until [DAB RESET] is displayed.
 - To clear the list of detected and programmed stations, press ♥ ♦ to confirm.
 - To exit the system menu, press a.

Remove invalid stations

- 1 Press and hold MENU to access the system menu.
 - → [DAB SCAN] is displayed.
- 2 Press ♠ Zone repeatedly until [PRUNE] is displayed.
 - To remove invalid stations from the list of scanned stations, press ❖.
 - To exit the system menu, press i

Check the current version of DAB firmware

- 1 Press and hold MENU to access the system menu.
 - → [DAB SCAN] is displayed.
- Press MENU / ZONE repeatedly until [SW VERSION] is displayed, and then press ♥ .
 - → The current version of DAB firmware is displayed.


7 Play from a storage device


This system can play .mp3 and .wma files that are copied onto a compatible storage device.



Vote

- Philips does not guarantee compatibility with all storage dovices.
- NTFS (New Technology File System) file system is not supported.





- Connect a compatible USB storage device or SD/SDHC card.
 - For an SD/SDHC card, detach the front panel first, insert the card into the card slot, and then attach the front panel.

- Press AS/SOURCE repeatedly to switch the source.
 - **[FRONT USB]**: For a USB storage device that is connected to the USB socket on the front panel
 - [REAR USB]: For a USB storage device that is connected to the USB connector on the rear panel
 - [SD/SDHC]: For an SD/SDHC card that is inserted into the **S** slot
- 3 If the play does not start, press ►11 6.

Control play

Button	Function
MENU / ZONE	Press repeatedly to select a folder:
▶ II 6	Pause or resume play.
	Press to play the previous or next track.
	Press and hold to rewind a track or search forward fast.
① /DISP	Press repeatedly to display available information about the current track.
3 REP	Press repeatedly to select a repeat mode: • [REPEAT ONE]: repeat the current track, • [REPEAT FLD]: repeat all tracks in the current folder, or • [REPEAT ALL]: repeat all tracks in the storage device.
SHUF 4	Press repeatedly to select a play mode: • [SHUFFLE ALL]: play all tracks randomly, • [SHUFFLE FLD]: play tracks in the current folder randomly, or • [SHUFFLE OFF]: play all tracks in the storage device in sequence.

Switch tracks

During play, you can switch tracks or folders quickly.

Switch tracks directly

- Press 1 7 to access the track list. → The file name of current track scrolls
- Rotate to toggle through tracks. Press **○** to play the selected track.

Switch folders for a track

- Press **2** to access the folder list. → The name of current folder scrolls.
- Rotate 🛈 🕸 to toggle through folders.
- Press to select the folder.
 - → The system starts playing the first track under the folder.

8 Play from an iPod/iPhone


- =
- **Vote**
- During play, no audio signals are transferred through the headphone socket of your iPod/iPhone.

Compatible iPod/iPhone models

This car audio system supports the following iPod and iPhone models.

- iPhone 4S, iPhone 4, iPhone 3GS, and iPhone 3G
- iPod touch (2nd, 3rd, and 4th generations)
- iPod classic
- iPod nano (3rd, 4th, 5th, and 6th generations)

Connect your iPod/iPhone



- 1 Connect an Apple 30-pin USB cable between
 - the USB socket on the front panel or the USB connector on the rear panel,
 - · your iPod/iPhone.

- Press AS/SOURCE repeatedly to switch the source to [FRONT USB] (Front USB socket) or [REAR USB] (Rear USB connector).
 - → The system starts playing tracks that are stored on your iPod/iPhone.



Note

 Before you disconnect the iPod/iPhone, switch the system to another source.

Control play

Button	Function
1	Press repeatedly to select a control mode: control play on your iPod/iPhone, or on the system.
▶ II 6	Press to pause or resume play.
	Press to play the previous or next track.
	Press and hold to rewind a track or search forward fast.
① /DISP	Press repeatedly to display available information about the current track.
3 REP	Press repeatedly to select a repeat mode: • [REPEAT ONE]: repeat the current track, or • [REPEAT ALL]: repeat all tracks.
SHUF 4	Press repeatedly to select a play mode: • [SHUFFLE ALL]: play all tracks randomly, • [SHUFFLE ALB]: play tracks in the current album randomly, or • [SHUFFLE OFF]: play all tracks in the iPod/iPhone library in sequence.

Search for a track

After accessing the iPod/iPhone menu, you can select a specific track quickly.


- 2 Rotate **⊙ ♦** to select a category.
- 3 Press to access the list of tracks under the category.
 - → The file name of the first track scrolls.
- 4 Rotate to select a track.
 - ightharpoonup The file name of current track scrolls.
- 5 Press to start play.

Charge your iPod/iPhone

Once the iPod/iPhone is docked and recognized, the charging starts.

9 Listen to an external player

You can use the system to amplify the audio input from an external player, for example, MP3 player.



- 1 Press AS/SOURCE repeatedly to switch the source to [AUX IN].
- 2 Connect an audio input cable with a 3.5 mm connector on both ends between
 - the AUDIO-IN socket on the front panel, and
 - the audio output socket (usually the headphone socket) on the external player.
- 3 Play audio on the external player.

10 Adjust sound


The following operations are applicable to all supported media.

Button	Function
① ❖	Rotate to increase or decrease the volume level.
① •	Press to mute the speakers or release the speakers from mute status.
MAX SOUND DBB	Press to enable or disable the MAX Sound feature.
MAX SOUND DBB	Press and hold to enable or disable the Dynamic Bass Boost (DBB) effect.
EQ AUDIO	Press repeatedly to select a sound equalizer:
EQ AUDIO	1 Press and hold to activate the setup of customized sound equalizer. 2 Press repeatedly to select an option: [BASS] (bass), [TREBLE] (treble), [BALANCE] (balance), or [FADER] (fader).
	3 Rotate ○ � to adjust the setting.

11 Additional information

Reset the system

If the system works abnormally, reset the system to factory default settings.




- 1 Detach the front panel.
- Press the **RESET** button with the tip of a ball-point pen or toothpick.
 - → All settings are reset to factory default.

Replace the fuse

If there is no power, check the fuse and replace it if it is damaged.

- 1 Check the electric connection.
- 2 Remove the damaged fuse from the rear panel.
- Insert a new fuse with the same specifications (15 A).





 If the fuse gets damaged immediately after it is replaced, an internal malfunction may occur. In such case, consult your Philips retailer.

Upgrade the firmware



- Power supply must not be interrupted during the upgrade.
- When the firmware upgrade succeeds, all settings are restored to the factory default status.

Register your product

- **1** Go to www.philips.com/welcome.
- 2 Click the link of "Register my product" (the exact wording of this link name may vary in different languages).
- 3 Log in with your account on the prompt Web page.
 - If you have no account for Club Philips, create one first on this Web page.
- 4 Search your product with "CE139DR/05" as the keyword.
- 5 Click the link of search result to access the Web page for registering your product.
- 6 Fill in necessary information about this product to complete the registration.

→ With the registration, you can get information about software update and product support at this Web page or via your mailbox that is registered as the account for Club Philips.

Perform the upgrade

- 1 Check the current firmware version of this product. (see 'Check the current version of DAB firmware' on page 17)
- **2** Go to www.philips.com/support.
- 3 Log in with your account for Club Philips.
 - → Support information about your registered product is displayed.
- 4 Click the link of "Firmware Upgrade Readme File" (the exact wording of this link name may vary in different languages).
- 5 Read and understand the instructions on firmware upgrade.
- **6** Follow the instructions to download the upgrade packet and complete the upgrade.
 - If the upgrade fails, reboot this system, and then perform the upgrade again.

12 Product information



Note

• Specifications are subject to change without prior notice.

General

Power supply	12 V DC (11 V - 16 V),
	negative ground
Fuse	15 A
Suitable speaker	4 - 8 Ω
impedance	
Maximum power	50 W × 4 channels
output	
Continuous power	22 W x 4 RMS
output	(4 Ω 10% T.H.D.)
Pre-Amp output	2.0 V
voltage	
Aux-in level	500 mV
Dimensions	182 X 52 X 95 mm
$(W \times H \times D)$	
Weight (main unit)	0.8 kg

Radio

Frequency range - FM	87.5 - 108.0 MHz (100kHz per step in auto search and 50kHz per step in manual search)
Usable sensitivity - FM (S/N = 20 dBA)	8 µV
Frequency range - AM(MW)	522 - 1620 KHz (9 kHz) 530 - 1710 kHz (10 kHz)

Usable sensitivity - AM(MW) (S/N = 20 dBA)	30 μV
Frequency range - DAB	174,928 - 239,200 MHz
Usable sensitivity - DAB (EN50248)	< -95 dbm

13 Troubleshooting

A

Warning

· Never remove the casing of this product.

To keep the warranty valid, never try to repair the product yourself.

If you encounter problems when using this product, check the following points before requesting service. If the problem remains unsolved, go to the Philips Web page (www. philips.com/support). When you contact Philips, make sure that the product is nearby and the model number and serial number are available.

No power or no sound

- The power supply from car battery is cut off, or the car battery runs out of energy.
 Power the system with car battery.
- Car engine is not on. Turn the car engine on.
- Cable is not correctly connected. Check connections.
- The fuse is burnt. Replace the fuse.
- Volume is too low. Adjust volume.
- If the above solutions cannot help, press the **RESET** button.
- Make sure that the current track is in a compatible format.

Noise in broadcasts

- Signals are too weak. Select other stations with stronger signals.
- Check the connection of the car antenna.
- Change the broadcast setting from stereo to mono

Preset stations are erased.

Battery cable is not correctly connected.
 Connect the battery cable to the terminal that is always live.

Cannot switch the source to iPod/iPhone

• Check whether the iPod/iPhone is securely connected.

- Check whether the iPod/iPhone is compatible with this system.
- Check whether the iPod/iPhone battery is nearly empty. Connect it to this system for charging first.

Cannot switch the source to [DAB/DAB+]

- Check whether the DAB radio receiver is securely connected.
- Check whether the DAB reception is enabled (see 'Disable the DAB reception' on page 16).

Display shows ERR-12.

 Data error, Check the USB storage device or SD/SDHC card

14 Notice

Any changes or modifications made to this device that are not expressly approved by Philips Consumer Lifestyle may void the user's authority to operate the equipment.

Care of the environment



Your product is designed and manufactured with high quality materials and components, which can be recycled and reused.



When this crossed-out wheeled bin symbol is attached to a product it means that the product is covered by the European Directive 2002/96/ EC. Please inform yourself about the local separate collection system for electrical and electronic products.

Please act according to your local rules and do not dispose of your old products with your normal household waste.

Correct disposal of your old product helps to prevent potential negative consequences for the environment and human health.

Environmental information

All unnecessary packaging has been omitted. We have tried to make the packaging easy to separate into three materials: cardboard (box), polystyrene foam (buffer) and polyethylene (bags, protective foam sheet.) Your system consists of materials which can be recycled and reused if disassembled by a specialized company. Please observe the local regulations regarding the disposal of packaging materials, exhausted batteries and old equipment.

Trademark notice



Windows Media and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.



"Made for iPod" and "Made for iPhone" mean that an electronic accessory has been designed to connect specifically to iPod or iPhone respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod or iPhone may affect wireless performance. iPod and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.

Other trademarks and trade names are those of their respective owners.

Copyright

2013 © Koninklijke Philips Electronics N.V. Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V or their respective owners. Philips reserves the right to change products at any time without being obliged to adjust earlier supplies accordingly.



Specifications are subject to change without notice © 2013 Koninklijke Philips Electronics N.V. All rights reserved.

