


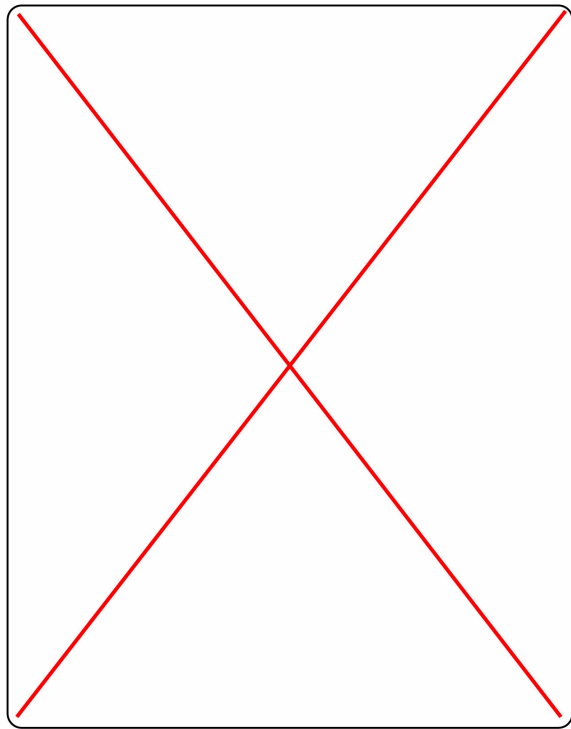

Philips
Stereo dubbing cable

1,5 m
3.5 mm (M) - 3.5 mm (M)
Coiled

SWA2529W

Ensure a reliable connection

with this stereo dubbing cable

Depend on this cable to provide you with a reliable audio connection between components.

Enjoy good audio quality

- High purity copper conductor for reliable signal transfer

Protects against signal loss

- Bare copper shielding

Easy installation

- Color coded connectors for instant recognition
- Non-slip ergonomic grip for easy use

Enjoy extended durability

- Molded plug for secure connections
- Flexible PVC jacket
- Rubber strain relief

PHILIPS

Stereo dubbing cable
1,5 m 3.5 mm (M) - 3.5 mm (M), Coiled

Specifications

Inner Carton

- Gross weight: 0.911 lb
- Gross weight: 0.4132 kg
- GTIN: 2 08 89446 00448 3
- Inner carton (L x W x H): 9.6 x 4 x 5.6 inch
- Inner carton (L x W x H): 24.4 x 10.2 x 14.3 cm
- Nett weight: 0.365 lb
- Nett weight: 0.1656 kg
- Number of consumer packagings: 6
- Tare weight: 0.546 lb
- Tare weight: 0.2476 kg

Outer Carton

- Gross weight: 6.435 lb
- Gross weight: 2.9192 kg
- GTIN: 1 08 89446 00448 6
- Outer carton (L x W x H): 12.6 x 10.1 x 12.2 inch
- Outer carton (L x W x H): 32.1 x 25.7 x 31 cm
- Nett weight: 2.19 lb
- Nett weight: 0.9936 kg

- Number of consumer packagings: 36
- Tare weight: 4.245 lb
- Tare weight: 1.9256 kg

Packaging dimensions

- Packaging dimensions (W x H x D): 9.5 x 23.5 x 2.1 cm
- Packaging dimensions (W x H x D): 3.7 x 9.3 x 0.8 inch
- Gross weight: 0.0542 kg
- Gross weight: 0.119 lb
- Nett weight: 0.0276 kg
- Nett weight: 0.061 lb
- Number of products included: 1
- Packaging type: Blister
- Tare weight: 0.058 lb
- Tare weight: 0.0266 kg
- Type of shelf placement: Hanging
- UPC: 8 89446 00448 9

SWA2529W/27

Highlights

High purity copper

This copper conductor provides high accuracy in signal transfer with minimal resistance.

Bare copper shielding

Bare copper shielding protects against signal loss.

Color-coded connectors

Color coded connections make it easy to install your cable into the correct inputs and outputs

Easy grip

This non-slip grip makes connecting your components easy and ergonomically comfortable.

Molded plug

Molded plugs ensure secure connections between components and offer extended durability.

Flexible PVC Jacket

Flexible PVC jacket provided protection to the delicate core of the cable. It also offers extended durability and ease of installation.

Rubber strain relief

Rubber strain relief provides a secure, yet flexible juncture between the cable and the plug.



Issue date 2015-06-02

Version: 1.0.2

12 NC: 8670 001 30998
UPC: 8 89446 00448 9

© 2015 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com