

label 料号: label Part NO.:

Q40G002781354B

客户 Customer	PHILIPS
型号 Model	55BDL3452T
销向 Sales Area	EU

安规签核Safety parts:

Yes  No

内销中文字体要求高度1.8mm以上

Yes  No

针对带有UL logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称,型号及 UL file no.

条码印刷:  
barcode print:

1. 所有条码读码等级: C级及以上,客户有特殊要求除外;

### REVISION

### VERSION A

版本变更说明:  
Version Changed Description:


与Q40G002781354A相比,  
更改显示器位置

### 备注Remark:

Apr-07-20  
YL.LIN

捷联电子(福建)有限公司  
TPV Electronics (Fujian) Co., Ltd.  
地址(Add): 中国福建省福清市元洪路上邦  
Shangzheng, Yuanhong Road, Fuqing City,  
Fujian Province, China  
电话(Tel): +86-591-85285555 85285559  
传真(Fax): +86-591-85285447  
邮编(Postcode): 350301

### COLOR GUIDE

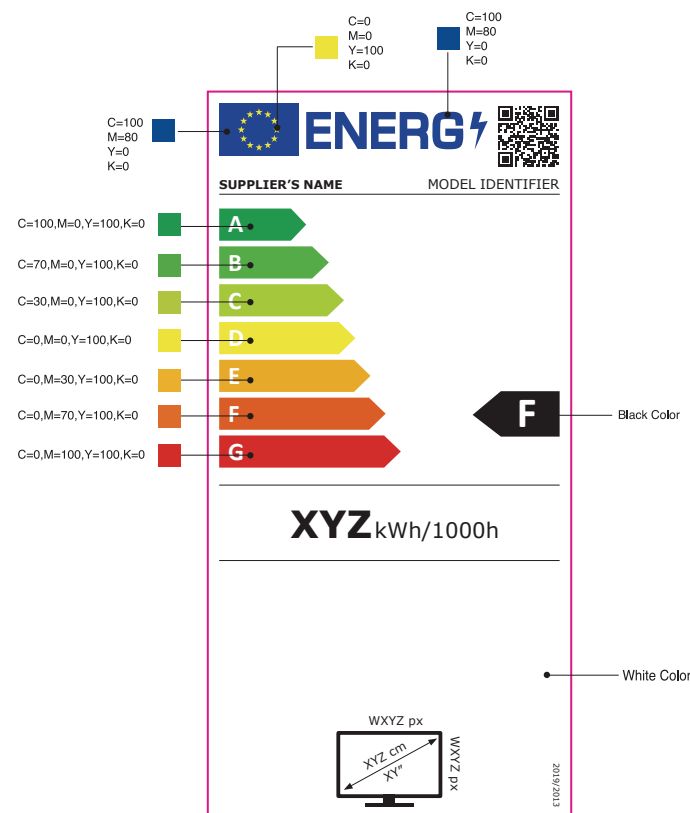

- NOTE:
- 印刷如图  
Printing as the drawing
  - 尺寸:具体见上图所示(公差: +/-0.2mm)  
Dimension:as the above drawing(Tolerance:+0/-0.2mm)
  - 材质: 50#白色PET(表面覆膜, 背面覆胶, 贴于粉烤前框, 撕下不可有残胶)
  - 颜色: 如图所示  
Color:See the drawing
  - 粘力: 将label切成25mm宽, 一端粘于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。  
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
  - 正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。  
在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。  
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C . In 80 ~ 100 ° C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C . In 65 ° C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.
  - 耐温湿度循环测试: 循环条件(贴在塑胶咬花面(PET)贴在塑胶咬花面): 温度-20~65°C, 湿度30~90%, 时间96小时后不翘角不分层不脱落不起泡等。  
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture):In temperature of -20 ~ 65 ° C and humidity of 30~90%to maintain 96 hours , the label should not be warp,delamination,frothy and so on.
  - 裁切需均匀且印刷不可有溢墨及颜色不均等不良现象  
Printing ink can not have overflow and printing color can not be uneven etc.
  - 其它测试要求详见(FQ-背胶类产品测试检验规格)

- 根据TPV推行RoHS的有关规定,所有的原材料及辅助材料必须符合RoHS的有关规定
- 所有原材料的规定物质: 如镉(Cd) 汞(Hg) 铅(Pb) 六价铬 PBB's PBDE's 及镉(Cd)+汞(Hg)+铅(Pb)+六价铬(针对随机出货的包装材料)的具体含量依据最新版RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

- According to the rule about RoHS of TPV,All raw material and assistant material should accord with the rule of RoHS
- All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard about environment substance for supplier>>.

