



Philips
LCD monitor

107cm (42")
multimedia
WXGA

BDL4221VS



Robust Display for Demanding Applications

Control your costs with this rugged network-controllable 107 cm (42") LCD monitor. Whether used in a network, a tiled matrix or as a single public display, this model offers a variety of features to meet the most demanding applications

Operational flexibility for different applications

- Enhanced zoom feature supports tiled matrix applications
- Remote Management and Configuration via RS232
- VGA loop through enables daisy chaining to multiple monitors
- Optional TV tuner
- Portrait mode operability

Lower total cost of ownership

- Intelligent power management for lower consumption
- No permanent burn-in when static information is displayed

Designed for public areas

- Security feature prevents unauthorized control
- Robust metal bezel and metal backcover

Optimized for public viewing

- Wide format WXGA 1366 x 768 resolution for sharper display
- Brightness automatically adjusts with ambient conditions

PHILIPS

Highlights

WXGA 1366 x 768 resolution

The wide format of XGA resolution LCD panel is capable of displaying 1366 x 768 pixels; WXGA allows monitors to be non-interlaced to ensure a better display performance and accurate color display effect.

Automatic brightness control

The adjustment of display settings to correspond with ambient light without user intervention.

Robust metal bezel

Specially designed for demanding public applications, the metal bezel offers higher durability and protection against vandalism. Anodized paint is used to offer extra protection of the bezel against scratches.

No unauthorized control

The local controls of the display are placed in such a way that they are less visible for immediate access. Furthermore the remote control sensor and the keypad on the display can

be disabled via RS232 in order to prevent unauthorized control of the display when placed in a public space.

Remote Management:: RS232

Remote Management allows the user to control and adjust the displays remotely via the RS232 protocol. Using CEC commands, you are able to have full control over all the displays in your signage network at any time.

Zoom function for tiled matrix

The internal zoom function enables easy implementation of a video wall matrix, without the need for expensive external equipment. Capable of many different configurations, creating a stunning video wall has become simplicity itself.

Signal loop through

Multiple screen daisy chain effectively distributes control and visual content from a single source to an array of monitors in various locations within a site.

Portrait mounting possible

This display is also able to be safely and reliably mounted in portrait position.

Optional TV tuner


An optional TV tuner can be ordered separately and installed by the user by simply plugging in the unit in a slot at the back of the monitor. When switching on the monitor the tuner will be recognized.

Intelligent power management

Intelligent power management employs energy-efficient technologies in product design to reduce power consumption and significantly lower the total cost of ownership.

No permanent burn-in

Public displays often show static information which could cause ghost images (burn-in). By simply switching off/on the monitor these ghost images disappear fully.



Specifications

Connectivity

- Audio output: Stereo Audio (3.5 mm jack) 1x, External loudspeaker connector
- PC: 3.5 mm PC audio input x1, DVI-D with HDCP, RS232 D-Sub9, RS232 D-sub9 output, VGA-in D-Sub 15HD, VGA-out D-Sub 15HD
- AV input: Component (YPbPr) x1, Audio (L/R) for YPbPr x1, Composite (CVBS) x1, Audio (L/R) x1, S-video x1, SCART x1
- AV output: Composite (CVBS) x1, Audio (L/R) x1

Picture/Display

- Panel Size: 42" / 106.7cm
- Aspect ratio: 16:9
- LCD panel type: 1366 x 768 pixels, Anti-glare polarizer
- Pixel pitch: 0.227 x 0.681 mm
- Optimum resolution: 1360 x 768 @ 60Hz
- Brightness: 600 cd/m²
- Display colors: 16.7 Million colors
- Contrast ratio (typical): 1200:1
- Response time (typical): 10 ms
- Viewing angle (horizontal): 178 degree
- Viewing angle (vertical): 178 degree
- Picture enhancement: 3D Combfilter, De-interlacer, Picture in Picture, Progressive scan
- Horizontal Scanning Frequency: 30 - 63 kHz
- Vertical Scanning Frequency: 56 - 75 Hz

Convenience

- Plug & Play Compatibility: sRGB, Windows 98/ME/2000/XP
- Picture in Picture: 1 tuner PIP, Double window
- User convenience: Automatic Brightness Control, Automatic Overheat Warning, On-screen Display
- Regulatory approvals: C-Tick, CE Mark, FCC-B, UL, CSA, MPRII, TÜV/GS
- OSD Languages: English, French, German, Italian, Spanish, Simplified Chinese
- Other convenience: Cable management, Carrying handles, Kensington lock
- Network controllable: RS232
- VESA Mount: 600 x 400 mm

- Detachable Audio: 2x10 W RMS Speakers
- Onboard Operating Controls: Hidden controls

Power

- Power supply: Built-in, 90-264 VAC, 50/60 Hz
- Consumption (On mode): typ. 140 W (PC), 220 W (TV)
- Sleep Mode: $\leq 3W$

Supported Display Resolution

- Computer formats: 640 x 480, 60, 75Hz, 720 x 400, 70Hz, 800 x 600, 60, 75Hz, 1024 x 768, 60, 75Hz, 1280 x 768, 60Hz, 1360 x 768, 60Hz
- Video formats: 480i, 60Hz, 480p, 60Hz, 576p, 50Hz, 576i, 50Hz, 720p, 50, 60Hz, 1080i, 50, 60Hz

Dimensions


- Weight: 31 kg
- Set Width (inch): 42.42 inch
- Set Height (inch): 25.76 inch
- Set Depth (inch): 5.91 inch
- Product weight (lb): 68.34 lb
- Relative humidity: 5% - 90%
- MTBF: 50,000 hrs
- Depth (w/o base & speakers): 150 mm
- Height (w/o base & speakers): 644 mm
- Width (w/o base & speakers): 1052 mm
- Width (with speakers): 1272 mm
- Width (with speakers) (inch): 50.079 inch
- Temperature (operation): 0°C to +35°C

Accessories

- Included accessories: Speakers (L/R), Table top stand (2 feet), DVI-D cable, VGA cable, Remote Control, Battery, AC Power Cord
- Optional accessories: PAL tuner box BPL4221R1, Ceiling mount BM04111&BM01111, Fixed wall mount BM02111, Flex wallmount BM04111&BM02212
- User Guide on CD-ROM

Miscellaneous

- Bezel: silver
- Warranty: Europe: 3-year on site, APMEA: 1 year

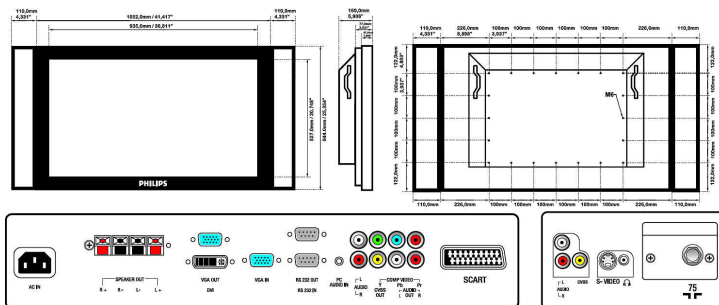

Issue date 2024-03-25

Version: 6.0.10

EAN: 87 10895 89599 6

© 2024 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com