

# PHILIPS

WQHD monitor with  
USB-C

Curved Business  
monitor

5000 series

34" (86.36 cm)

3440 x 1440 (WQHD)

34B2U5600C



## Redefining workflow productivity

This monitor is all about quality. With its WQHD resolution, Smart KVM switch, and USB-C to RJ45 connectivity, it is the ideal option for switching between sources and connecting to the Internet without compromising on picture quality.

### **Superb Picture Quality**

- VA display delivers awesome images with wide viewing angles

### **Designed for the way you work**

- Built-in stereo speakers for multimedia
- Eyesafe-certified blue light protection and colour accuracy
- Tilt, swivel and height-adjust for an ideal viewing position
- Curved display design for a more immersive experience
- Earphone hook: for customisable storage
- SmartKVM: for easily switching between sources.

### **Optimal Connectivity**


- RJ-45 to USB-C gives easy network connection with security
- USB 3.2 high-speed data transfer

### **Designed for sustainability**

- PowerSensor saves up to 80% energy costs


## Highlights

### VA display

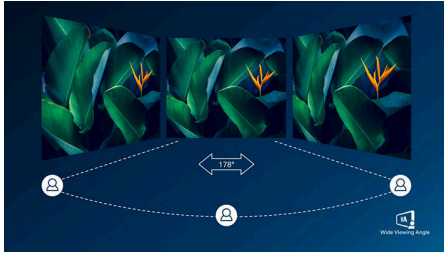

The Philips VA LED display uses an advanced multi-domain vertical alignment technology that gives you super-high static contrast ratios for extra-vivid and bright images. While standard office applications are handled with ease, it is especially suitable for photos, web browsing, films, gaming and demanding graphical applications. Its optimised pixel management technology gives you a 178/178 degree extra-wide viewing angle, resulting in crisp images.

### Curved display design

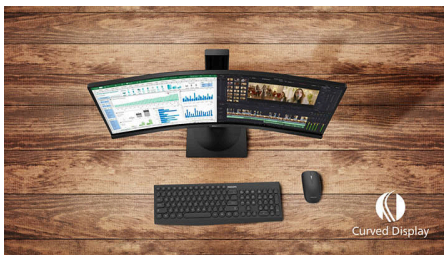

Desktop monitors offer a personal user experience, which suits a curved design very well. The curved screen provides a pleasant yet subtle immersion effect, which focuses on you at the centre of your desk.

### Built-in stereo speakers




A pair of high-quality stereo speakers built into a display device. They may be visible front firing, or invisible down firing, top firing, rear firing etc. depending on model and design.

### TUV Rheinland Eyesafe - RPF<sup>®</sup> 40



Philips display meets the TUV Rheinland Eyesafe<sup>®</sup> standard to truly protect you from long exposure to blue light. The always-on blue light filter not only helps reduce digital eye strain, but also guarantees colour integrity.

### Compact Ergo Base

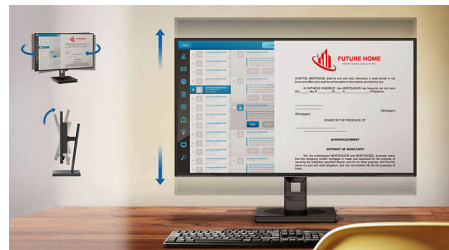

The Compact Ergo Base is a people-friendly Philips monitor base that tilts, swivels and height-adjusts so each user can position the monitor for maximum viewing comfort and efficiency.

### Earphone Hook



Earphone storage is unmatched with this feature. Carefully pull down the hook located on the side of the monitor: This feature makes for a tidy desktop and provides a handy cable management solution for your workspace.

### SmartKVM




Unlike traditional built-in KVM monitor buttons, the smart KVM allows for switching between sources with the click of a button on your keyboard. When all devices are properly connected, users can easily switch between sources by clicking the "Ctrl" key three times.



## Highlights

### PowerSensor

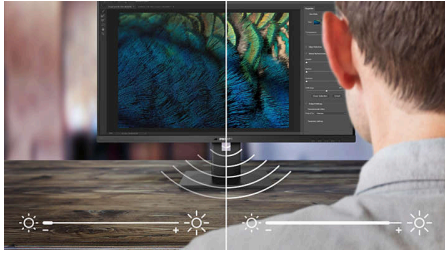

PowerSensor is a built-in 'people sensor' that transmits and receives harmless infrared signals to determine if the user is present and then automatically reduces monitor brightness when the user steps away from the desk, cutting energy costs by up to 80 percent and prolonging monitor life

### High-speed data transfer

USB 3.2 high-speed data transfer

### USB-C Docking with RJ45



Simplify all peripherals from monitor to PC using one-cable docking USB Type-C connector, including networking, high-resolution video output from PC to monitor, and surfing on the Internet without an additional network cable,

even without a LAN port on your notebook. RJ45 connection through USB-C offers a fast and secure connection when needed. Getting the fastest data speeds allows you to transfer data from a HDD to your PC faster than ever. Additionally, USB-C with power delivery can even enable you to power and charge your notebook from the monitor, eliminating the need for extra power cables.



# Specifications

## Picture/Display

**Panel Size:** 34 inch/86.36 cm  
**Aspect ratio:** 21:9  
**LCD panel type:** VA LCD  
**Backlight type:** W-LED system  
**Pixel pitch:** 0.23175 x 0.23175 mm  
**Optimum resolution:** 3440 x 1440 @ 60 Hz  
**Brightness:** 300 cd/m<sup>2</sup>  
**Display colours:** 16.7 M (8 bit)  
**Colour gamut (typical):** NTSC area: 104%, sRGB area: 120%\*  
**Contrast ratio (typical):** 4000:1  
**SmartContrast:** 50,000,000:1  
**Response time (typical):** 4 ms (Grey to Grey)\*  
**Viewing angle:** 178° (H)/178° (V), @ C/R > 10  
**Picture enhancement:** SmartImage  
**Maximum resolution:** 3440 x 1440 @ 100 Hz (HDMI) 3440 x 1440 @ 120 Hz (DP/USB-C)  
**Effective viewing area:** 797.22 (H) x 333.72 (V) - at a 1500R curvature\*  
**Scanning Frequency:** 30–220 kHz (H)/48–120 Hz (V)  
**sRGB**  
**Delta E:** < 2 (for sRGB)  
**Flicker-free**  
**Pixel Density:** 109.68 PPI  
**Display Screen Coating:** Anti-Glare, 3H, Haze 25%  
**SmartUniformity:** 93 ~ 105%  
**EasyRead**  
**Adaptive sync**

## Connectivity

**Signal Input:** HDMI 2.0 x 2, DisplayPort 1.4 x 1, USB-C x 1  
**Sync Input:** Separate Sync, Sync on Green  
**Audio (In/Out):** Audio out/Microphone in combo jack  
**RJ45:** Ethernet LAN up to 1G\*  
**HDCP:** HDCP 1.4 (HDMI/DisplayPort/USB-C); HDCP 2.2 (HDMI/DisplayPort/USB-C)  
**HBR3:** HBR 3 (DisplayPort/USB-C)  
**USB Hub:** USB 3.2, Gen 2/10 Gbps, upstream: USB-C1 x 1 (Data DP Alt mode typical PD 96 W) \*, USB-C2 x 1 (Data); downstream: USB-A x 4 (with 1 for fast charge B.C 1.2), USB-C3 x 1 (Data, PD 15 W)

## Convenience

**Built-in Speakers:** 5 W x 2  
**Plug and Play Compatibility:** DDC/CI, Mac OS, sRGB, Windows 11/10

**User convenience:** SmartImage, Input, User, Menu, Power On/Off  
**OSD Languages:** Brazil Portuguese, Czech, Dutch, English, French, Finnish, German, Greek, Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian  
**Other convenience:** Kensington lock, Earphone hook, VESA mount (100 x 100 mm)  
**MultiView:** 2 x devices, PIP/PBP mode  
**Noise cancellation**  
**SmartKVM:** Yes (USB-C1/USB-C2)

## Stand

**Height adjustment:** 180 mm  
**Swivel:** -/+ 180 degree  
**Tilt:** -5/25 degree

## Power

**ECO mode:** 20.5 W (typ.)  
**Power supply:** Built-in, 100–240 VAC, 50–60 Hz  
**Off mode:** Zero watts with AC switch  
**On mode:** 28.3 W (typ.) (Energy Star test method)  
**Standby mode:** 0.3 W (typ.)  
**Power LED indicator:** Operation - White, Standby mode - White (flashing)  
**Energy Label Class:** F

## Dimensions

**Packaging in mm (W x H x D):** 980 x 525 x 188 mm  
**Product without stand (mm):** 807 x 369 x 112 mm  
**Product with stand (max height):** 807 x 575 x 281 mm

## Weight

**Product with packaging (kg):** 15.65 kg  
**Product with stand (kg):** 10.40 kg  
**Product without stand (kg):** 7.64 kg

## Operating conditions

**Altitude:** Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)  
**Temperature range (operation):** 0°C to 40 °C  
**Relative humidity:** 20%-80 %  
**Temperature range (storage):** -20°C to 60 °C  
**MTBF (demonstrated):** 70,000 hrs (excluded backlight)

## Sustainability

**Environmental and energy:** PowerSensor, LightSensor, Energy Star, EPEAT\*, RoHS  
**Post-consumer recycled plastic:** 85%+OBP 5%  
**Recyclable packaging material:** 100 %  
**Specific Substances:** Mercury free, PVC/BFR free housing

## Compliance and standards

**Regulatory Approvals:** CB, CE Mark, EPA, TUV/GS, TUV Ergo, TCO Certified, EAC, EAEU RoHS, MEPS, UKCA, EMF, FCC, ICES-003, eyesafe® CERTIFIED 2.0, TÜV Rheinland Low Blue Light (Hardware Solution)

## Cabinet

**Finish:** Texture  
**Foot:** Silver  
**Front bezel:** Charcoal  
**Rear cover:** Charcoal

## What's in the box?

**Cables:** HDMI cable, DisplayPort cable, USB-C to C cable, Power cable  
**Monitor with stand**  
**User Documentation**

- \* Radius of the arc of the display curvature in mm
- \* Response time value equal to SmartResponse
- \* NTSC Area based on CIE 1976
- \* sRGB Area based on CIE1931
- \* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode
- \* Activities such as screen sharing and online streaming over the Internet can impact your network performance. Your hardware and network bandwidth will determine the overall audio and video quality.
- \* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.
- \* If your Ethernet connection seems slow, please enter the OSD menu and select USB 3.0 or a higher version that can support the LAN speed up to 1G.
- \* The USB-C power delivery of this display is up to 100 W (96 W in typical). The maximum power delivery will depend on your device.
- \* EPEAT rating is valid only where Philips registers the product. Please visit <https://www.epeat.net/> for registration status in your country.
- \* The monitor may look different from feature images.
- \* The products and accessories listed on this leaflet may differ by country and region.

