

PHILIPS

4K UHD monitor

Business Monitor

3000 series

32 (31.5"/80 cm diag.)

3840 x 2160 (4K UHD)

32B1N3800



Daily routine simplified

This 32 inch monitor showcases beautiful imagery in 4K resolution and a 1.074 billion colour gamut. In addition, its DisplayPort connectivity and VA panel make for a great all-around option for your workspace.

Excellent performance


- VA display delivers awesome images with wide viewing angles
- SmartImage pre-sets for easy optimised image settings
- UltraClear 4K UHD (3840 x 2160) resolution for precision
- 1.074 billion colours for smooth colour gradations and detail

Designed for the way you work

- Built-in stereo speakers for multimedia
- SmartErgoBase enables user-friendly ergonomic adjustments
- DisplayPort connection for maximum visuals
- HDMI ensures universal digital connectivity
- Less eye fatigue with Flicker-Free technology
- LowBlue Mode for easy-on-the-eyes productivity
- EasyRead mode for a paper-like reading experience


Highlights

VA display

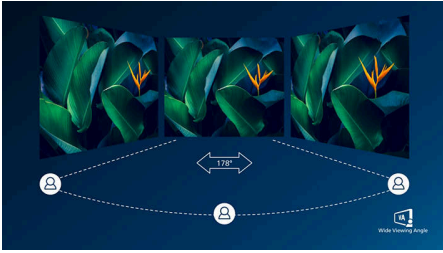


The Philips VA LED display uses an advanced multi-domain vertical alignment technology that gives you super-high static contrast ratios for extra- vivid and bright images. While standard office applications are handled with ease, it is especially suitable for photos, web browsing, films, gaming and demanding graphical applications. Its optimised pixel management technology gives you a 178/178 degree extra-wide viewing angle, resulting in crisp images.

10-bit colours

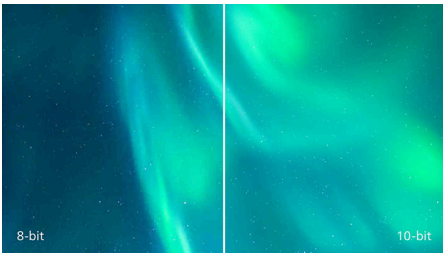

The 10-bit display delivers rich colour depth with 1.074 billion colours and 12-bit internal processing for recreating smooth, natural colours without gradations and colour banding.

UltraClear 4K UHD Resolution

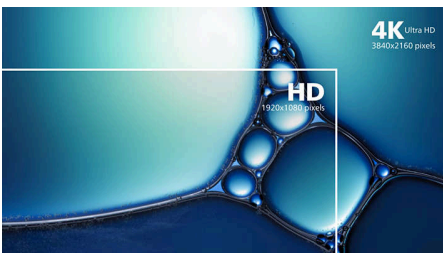

These Philips displays utilise high-performance panels to deliver UltraClear, 4K UHD (3840 x 2160) resolution images. Whether you are a demanding professional requiring extremely detailed images for CAD solutions, a user of 3D

graphics applications or a financial wizard working on huge spreadsheets, Philips displays will make your images and graphics come alive.

SmartImage



SmartImage is an exclusive leading edge Philips technology that analyses the content displayed on your screen and optimises your display performance. This user-friendly interface allows you to select various modes, like Office, Photo, Movie, Game, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimises the contrast, colour saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time at the touch of a single button!

DisplayPort connection




DisplayPort is a digital link from PC to monitor without any conversion. With higher capabilities than DVI standard, it is fully capable to support up to 15 metre cables and 10.8 Gbps/sec data transfer. With this high performance and zero latency, you get the fastest imaging and refresh rates — making DisplayPort the best choice for not only general office or home use, but also for the more demanding gaming and films, video editing and more. It also keeps interoperability in mind via the use of various adapters.

HDMI Ready



An HDMI-ready device has all the required hardware to accept High-Definition Multimedia Interface (HDMI) input. An HDMI cable enables high-quality digital video and audio to be transmitted over a single cable from a PC or any number of AV sources (including set-top boxes, DVD players, A/V receivers and video cameras).

Flicker-Free technology

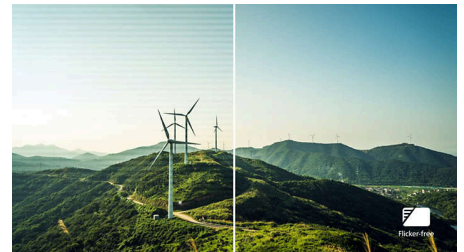

Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-Free technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

LowBlue Mode




Studies have shown that just as ultra-violet rays can cause eye damage, shortwave-length blue light rays from LED displays can cause eye damage and affect vision over time. Developed for wellbeing, the Philips LowBlue Mode setting uses a smart software technology to reduce harmful shortwave blue light.



Highlights

EasyRead mode

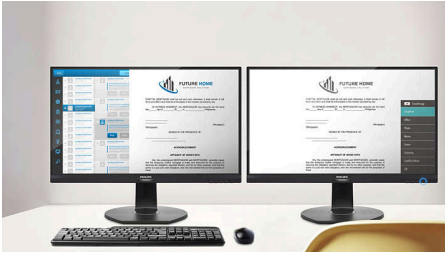


EasyRead mode for a paper-like reading experience

Built-in stereo speakers



A pair of high-quality stereo speakers built into a display device. They may be visible front firing, or invisible down firing, top firing, rear firing etc. depending on model and design.

SmartErgoBase

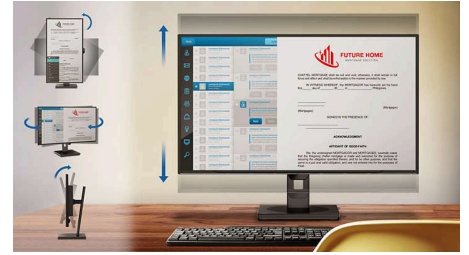

The SmartErgoBase is a monitor base that delivers ergonomic display comfort and provides cable management. The base can swivel, tilt and rotate to various angles to ensure maximum comfort. The height-adjustable stand guarantees the optimal viewing level, reducing the physical strains of a long workday, while cable management reduces cable clutter and keeps the workspace neat and professional.



Specifications

Picture/Display

Panel Size: 31.5"/80 cm
Aspect ratio: 16:9
LCD panel type: VA LCD
Backlight type: W-LED system
Pixel pitch: 0.18159 x 0.18159 mm
Brightness: 350 cd/m²
Display colours: 1.07 B (10 bits)*
Colour gamut (typical): sRGB 122%, NTSC 106 %
*
Contrast ratio (typical): 3500:1
SmartContrast: 50,000,000:1
Response time (typical): 4 ms (Grey to Grey)*
Viewing angle: 178° (H)/178° (V), @ C/R > 10
Picture enhancement: SmartImage
Maximum resolution: 3840 x 2160@60 Hz
Effective viewing area:
697.306 (H) x 392.234 (V) mm
Scanning Frequency: 30–140 kHz (H)/23–
75 Hz (V)
sRGB
Flicker-free
Pixel Density: 140 PPI
LowBlue Mode
Display Screen Coating: Anti-Glare, 3H, Haze
25%
EasyRead

Connectivity

Signal Input: HDMI 2.0 x 2, DisplayPort 1.4 x 1
Sync Input: Separate Sync, Sync on Green
Audio (In/Out): Audio out
HDCP: HDCP 1.4 (HDMI/DisplayPort); HDCP 2.2
(HDMI/DisplayPort)
HBR3: HBR 3 (DisplayPort/USB-C)
USB Hub: USB3.2, Gen1, 5G; upstream: USB-B x 1 ;
downstream: USB-A x 4 (with x 1 fast charge
B.C 1.2)

Convenience

Built-in Speakers: 3 W x 2
Plug and Play Compatibility: DDC CI, Mac OS,
sRGB, Windows 11/10
User convenience: SmartImage, Input,
Brightness, Menu, Power On/Off, SmartControl
OSD Languages: Brazil Portuguese, Czech, Dutch,
English, French, Finnish, German, Greek,
Hungarian, Italian, Japanese, Korean,
Portuguese, Polish, Russian, Simplified Chinese,

Spanish, Swedish, Traditional Chinese, Turkish,
Ukrainian
Other convenience: Kensington lock, VESA
mount (100 x 100 mm)
Control software: SmartControl

Stand

Height adjustment: 180 mm
Pivot: -/+90 degree
Swivel: -/+ 180 degree
Tilt: -5/25 degree

Power

ECO mode: 30.5 W (typ.)
Power supply: Built-in, 100–240 VAC, 50–60 Hz
Off mode: 0.3 W (typ.)
On mode: 53.1 W (typ.)
Standby mode: 0.3 W (typ.)
Power LED indicator: Operation - White, Standby
mode - White (flashing)
Energy Label Class: F

Dimensions

Packaging in mm (W x H x D): 930 x 563 x
186 mm
Product without stand (mm): 714 x 422 x 62 mm
Product with stand (max height):
714 x 631 x 280 mm

Weight

Product with packaging (kg): 15.96 kg
Product with stand (kg): 11.29 kg
Product without stand (kg): 7.38 kg

Operating conditions

Altitude: Operation: +12,000 ft (3658 m), Non-
operation: +40,000 ft (12,192 m)
Temperature range (operation): 0°C to 40 °C
Relative humidity: 20%-80 %
Temperature range (storage): -20°C to 60 °C
MTBF (demonstrated): 70,000 hrs (excluded
backlight)

Sustainability

Environmental and energy: RoHS
Post-consumer recycled plastic: 85%
Recyclable packaging material: 100 %
Specific Substances: PVC/BFR free housing,
Mercury free, Lead-free

Compliance and standards

Regulatory Approvals: CB, CE Mark, TUV/GS,
TUV Ergo, EAC, EAEU RoHS, MEPS, PSB, UKCA,
EMF, FCC, ICES-003

Cabinet

Finish: Texture
Foot: Black/Black
Front bezel: Black/Black
Rear cover: Black/Black

What's in the box?

Cables: HDMI cable, DisplayPort cable, Power
cable
**Monitor with stand
User Documentation**

