# Contents

LCD display

Remote Control and AAA Batteries

Quick start guide

Power Cord

RS232 Cable

RS232 Daisy Chain Cable

IR Sensor Cable

**AC Switch Cover**

USB Cover

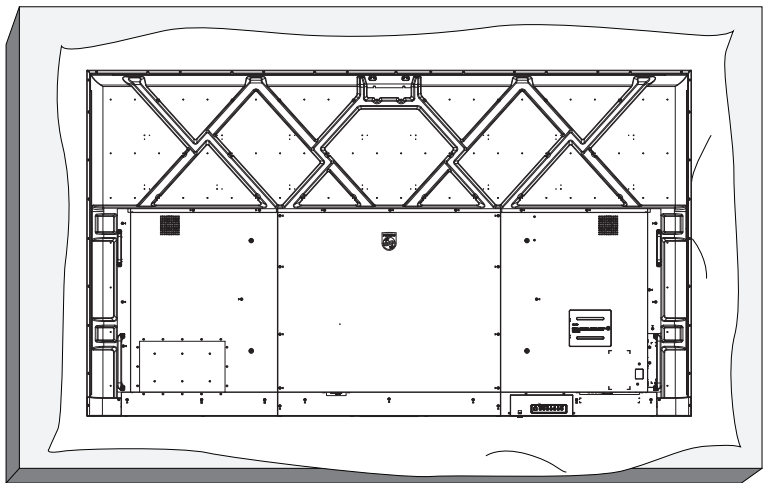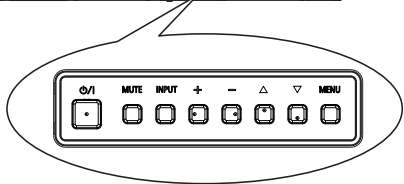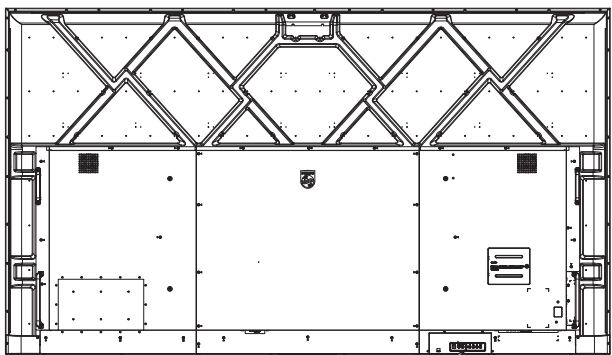**Cable Clip x 2PCS**

Philips logo plate

CRD22 Wi-Fi module

* Differences according to regions.
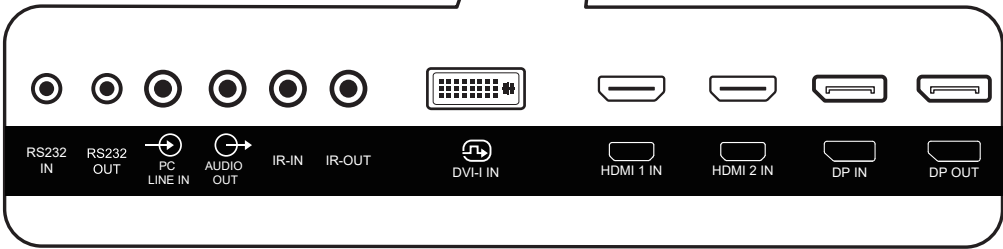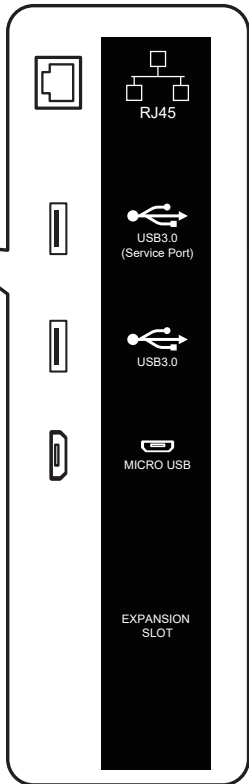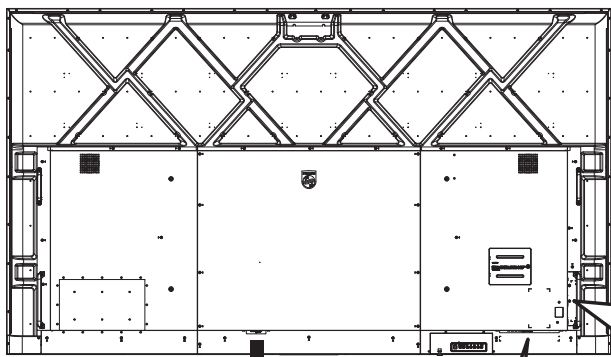Display design and accessories may differ from those illustrated above.
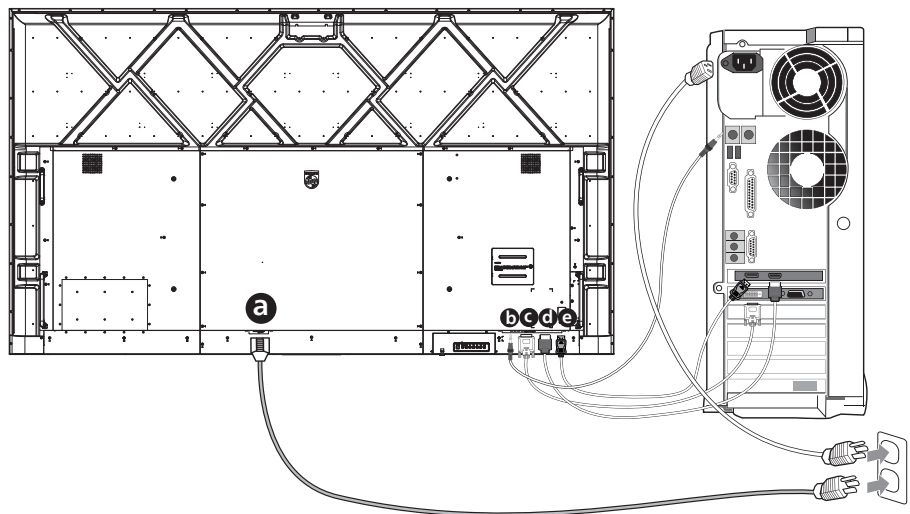
X4

---

1 Unboxing

X4

---

2 Control Panel

⏻/I MUTE INPUT + — △ ▽ MENU

---

3 Input/Output Terminals

RJ45

USB3.0 (Service Port)

USB3.0

MICRO USB

EXPANSION SLOT

RS232 IN | RS232 OUT | PC LINE IN | AUDIO OUT | IR-IN | IR-OUT | DVI-I IN | HDMI 1 IN | HDMI 2 IN | DP IN | DP OUT

---

4 Connection

a AC IN

b AUDIO

c DVI

d HDMI

e DP

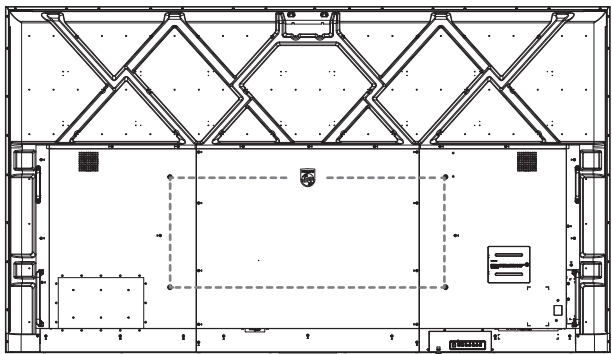
5 Installation

X4

M8 * (15+X) mm
(X=Thickness of Wall mount BKT)
98BDL4650D: 1000mm x 400mm

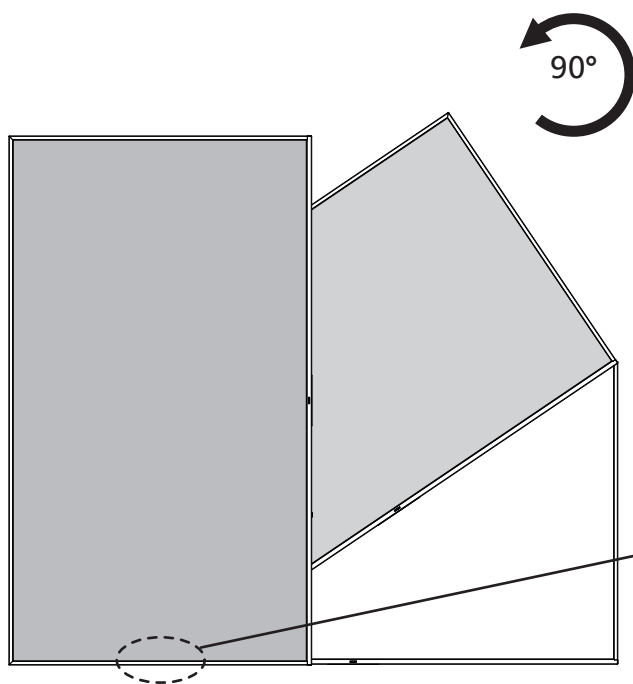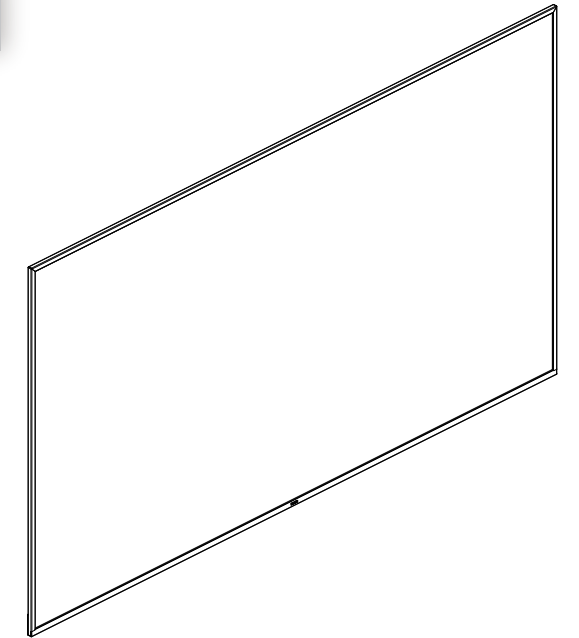# 6 Mounting in Portrait Orientation

90°

a
Y
X

b
PHILIPS
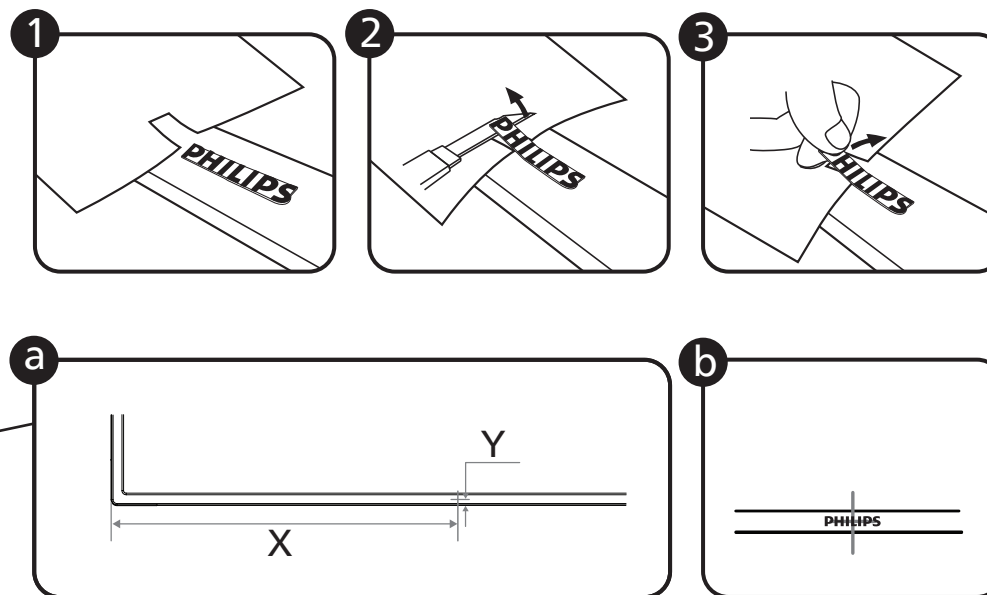
98BDL4650D: X=627.7 mm Y=8.8 mm

Quick start

For more information, please visit:
https://www.philips.com/ppds

Q41G98M181311A