

PHILIPS

LCD monitor

V Line

22 (21.5" / 54.6 cm diag.)

1920 x 1080 (Full HD)

221V8LB



Vivid, crisp images beyond boundaries

The Philips V monitor line provides essential features at a great value. With an overclockable 120Hz refresh rate and 16:9 Full HD display, this monitor provides a high-definition picture experience with crisp imagery.

Easy on the eyes

- EasyRead mode for a paper-like reading experience
- Less eye fatigue with Flicker-free technology
- LowBlue Mode for easy on-the-eyes productivity

Experience true multimedia

- HDMI ensures universal digital connectivity

Good for Gaming


- 1ms (MPRT) fast response for crisp image and smooth gameplay
- 120Hz refresh rates for ultra-smooth, brilliant images
- Effortlessly smooth action with Adaptive-Sync technology

Vivid pictures every time

- SmartContrast for rich black details
- 16:9 Full HD display for crisp detailed images
- VA display delivers awesome images with wide viewing angles

Highlights

VA display

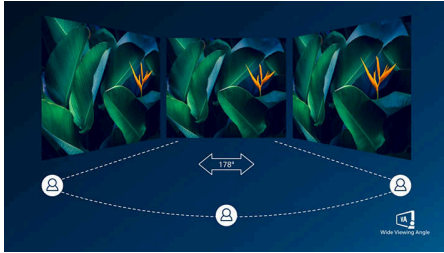

Philips VA LED display uses an advanced multi-domain vertical alignment technology which gives you super-high static contrast ratios for extra vivid and bright images. While standard office applications are handled with ease, it is especially suitable for photos, web-browsing, movies, gaming, and demanding graphical applications. It's optimized pixel management technology gives you 178/178 degree extra wide viewing angle, resulting in crisp images.

16:9 Full HD display



Picture quality matters. Regular displays deliver quality, but you expect more. This display features enhanced Full HD 1920 x 1080 resolution. With Full HD for crisp detail paired with high brightness, incredible contrast and realistic colors expect a true to life picture.

SmartContrast



SmartContrast is a Philips technology that analyzes the contents you are displaying, automatically adjusting colors and controlling backlight intensity to dynamically enhance contrast for the best digital images and videos or when playing games where dark hues are displayed. When Economy mode is selected, contrast is adjusted and backlighting fine-tuned for just-right display of everyday office applications and lower power consumption.

Flicker-free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-free Technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

LowBlue Mode



Studies have shown that just as ultra-violet rays can cause eye damage, shortwave length blue light rays from LED displays can cause eye damage and affect vision over time. Developed for wellbeing, Philips LowBlue Mode setting uses a smart software technology to reduce harmful shortwave blue light.

EasyRead mode



EasyRead mode for a paper-like reading experience

HDMI Ready



An HDMI-ready device has all the required hardware to accept High-Definition Multimedia Interface (HDMI) input. A HDMI cable enables high-quality digital video and audio all transmitted over a single cable from a PC or any number of AV sources (including set-top boxes, DVD players, A/V receivers and video cameras).



Wide Viewing Angle



Flicker-free



LowBlue Mode



EasyRead



HIGH DEFINITION MULTIMEDIA INTERFACE




Adaptive-Sync



Fast Response 1ms MPRT


Highlights

Adaptive-Sync technology

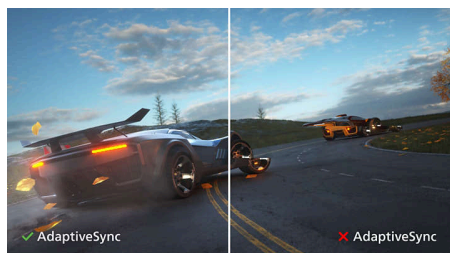

Gaming shouldn't be a choice between choppy gameplay or broken frames. Get fluid, artifact-free performance at virtually any framerate with Adaptive-Sync technology, smooth quick refresh and ultra fast response time.

1ms MPRT fast response

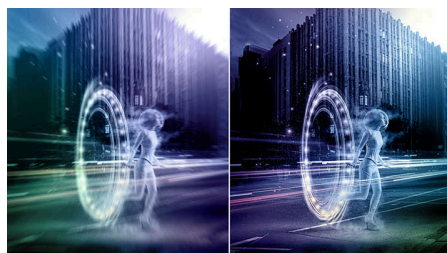

MPRT (motion picture response time) is more intuitive way to describe the response time, which directly refers the duration from seeing blurry noise to clean and crisp images. Philips gaming monitor with 1 ms MPRT effectively eliminates smearing and motion blur, delivers

shaper and precise visuals to enhance gaming experience. Best choice for playing thrilling and twitch-sensitive games.

Overclockable 120Hz refresh rate



With an overclockable 120 Hz refresh rate, less skipped frames are ensured. You can easily target the enemy in ultra-clear, smooth motion.



Wide Viewing Angle



Flicker-free



LowBlue Mode



EasyRead



Specifications

Picture/Display

Panel Size: 21.5 inch / 54.6 cm
Aspect ratio: 16:9
LCD panel type: VA LCD
Backlight type: W-LED system
Pixel pitch: 0.2493 x 0.241 mm
Brightness: 250 cd/m²
Display colors: 16.7 M (8 bit)
Contrast ratio (typical): 3000:1
SmartContrast: Mega Infinity DCR
Response time (typical): 4 ms (GtG)*
Viewing angle: 178° (H) / 178° (V), @ C/R > 10
Picture enhancement: SmartImage
Maximum resolution: 1920 x 1080 @ 120 Hz (Overclock)*
Effective viewing area: 478.656 (H) x 260.28 (V)
Scanning Frequency: VGA: 30 KHz - 85 KHz (H) / 48 Hz - 60 Hz (V); HDMI: 30 KHz - 140 KHz (H) / 48 Hz - 120 Hz (V)
sRGB
Flicker-free
Pixel Density: 102 PPI
LowBlue Mode
Display Screen Coating: Anti-glare, 3H, Haze 25%
MPRT: 1 ms
EasyRead
Adaptive sync

Connectivity

Signal Input: VGA (Analog), HDMI 1.4
Sync Input: Separate Sync, Sync on Green
Audio (In/Out): Audio out
HDCP: HDCP 1.4 (HDMI)

Convenience

Plug & Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 11 / 10 / 8.1 / 8 / 7
User convenience: Power On/Off, Menu/OK, Brightness/UP, Input/Down, SmartImage/Back
OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Simplified Chinese, Swedish, Turkish, Traditional Chinese, Ukrainian
Other convenience: Kensington lock, VESA mount (100x100mm)

Stand

Tilt: -5/20 degree

Power

Power supply: Built-in, 100-240VAC, 50-60Hz
Off mode: 0.3 W (typ.)
On mode: 14.8 W (typ.)
Standby mode: 0.5 W (typ.)
Power LED indicator: Operation - White, Standby mode- White (blinking)

Dimensions

Product with stand (mm): 493 x 369 x 220 mm
Packaging in mm (WxHxD): 570 x 436 x 109 mm
Product without stand (mm): 493 x 286 x 44 mm

Weight

Product with packaging (kg): 4.35 kg
Product with stand (kg): 2.63 kg
Product without stand (kg): 2.23 kg

Operating conditions

Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)
Temperature range (operation): 0°C to 40°C °C
MTBF: 30,000 (Excluded backlight) hour(s)
Relative humidity: 20%-80 %
Temperature range (storage): -20°C to 60°C °C

Sustainability

Environmental and energy: RoHS
Recyclable packaging material: 100 %

Compliance and standards

Regulatory Approvals: CB, CE Mark, INMETRO, ETL, CEC, BSMI, UKCA, EMF, FCC, ICES-003

Cabinet

Color: Black
Finish: Textured



* The maximum resolution works for HDMI input only.
* Response time value equal to SmartResponse
* The Overclock function increases the native refresh rate, however, it does have some associated risks along with it. If the screen is displayed abnormally after rebooting, please switch off the Overclock setting located in the monitor's OSD menu.
* The monitor may look different from feature images.
* The products and accessories listed on this leaflet may differ by country and region.