

PHILIPS

LCD monitor with
SmoothTouch

Monitor

B Line

22 (21.5" / 54.6 cm diag.)

1920 x 1080 (Full HD)

222B9TA



Brilliant interactive display with SmoothTouch

A sturdy water- and dust-resistant touch-screen monitor for flexible use anywhere, with articulating stand to fit angles you need. Offering simple and intuitive use across applications, greatly boosts productivity.

Brilliant interactive display

- SmoothTouch display for natural, fluid touch response
- VA display delivers awesome images with wide viewing angles
- 16:9 Full HD display for crisp, detailed images
- EasyRead mode for a paper-like reading experience
- Less eye fatigue with Flicker-Free technology
- LowBlue Mode for easy-on-the-eyes productivity
- SmartContrast for rich black details
- Stylus for fluid and accurate performance with more control
- Monitor front surface meets IP65 for water and dust resistance

Easy to experience

- USB 3.2 high-speed data transfer
- HDMI ensures universal digital connectivity
- DisplayPort connection for maximum visuals
- VESA mount allows for flexibility

Highlights

SmoothTouch



This Philips display uses Projected capacitive 10-point touch technology for fluid response. You can fully utilise the new capabilities of touch-based applications and bring your older applications to life. Touch-type with 10 fingers or play exciting interactive games with your friends. Collaborate with colleagues interactively at work or school environment and increase your productivity and efficiency.

16:9 Full HD display



Picture quality matters. Regular displays deliver quality, but you expect more. This display features enhanced Full HD 1920 x 1080 resolution. With Full HD for crisp detail paired with high brightness, incredible contrast and realistic colours, expect a true-to-life picture.

SmartContrast



SmartContrast is a Philips technology that analyses the contents you are displaying, automatically adjusting colours and controlling backlight intensity to dynamically enhance contrast for the best digital images and videos or when playing games where dark hues are displayed. When Economy mode is selected,

contrast is adjusted and backlighting fine-tuned for just-right display of everyday office applications and lower power consumption.

LowBlue Mode




Studies have shown that just as ultra-violet rays can cause eye damage, shortwave-length blue light rays from LED displays can cause eye damage and affect vision over time. Developed for wellbeing, the Philips LowBlue Mode setting uses a smart software technology to reduce harmful shortwave blue light.

Flicker-Free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-Free technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

VA Display

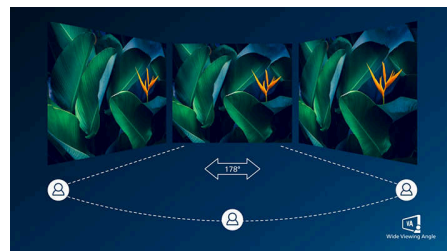

The Philips VA LED display uses an advanced multi-domain vertical alignment technology that gives you super-high static contrast ratios for

extra-vivid and bright images. While standard office applications are handled with ease, it is especially suitable for photos, web browsing, films, gaming and demanding graphical applications. Its optimised pixel management technology gives you a 178/178 degree extra-wide viewing angle, resulting in crisp images.

Water- and dust-resistant



For less-than-perfect environments, you need a monitor that's designed to hold up to the splashes of water and dust that happen in the everyday world. Ingress Protection (IP) ratings defined in international standard IEC/EN 60529, are used to define levels of sealing effectiveness of electrical enclosures against intrusion from foreign bodies and moisture. This Philips display meets the international IP rating for water and dust resistance. It will hold up to the water splashes and dust that happen in the everyday world.

HDMI Ready



An HDMI-ready device has all the required hardware to accept High-Definition Multimedia Interface (HDMI) input. An HDMI cable enables high-quality digital video and audio to be transmitted over a single cable from a PC or any number of AV sources (including set-top boxes, DVD players, A/V receivers and video cameras).



Highlights


DisplayPort connection



DisplayPort is a digital link from PC to monitor without any conversion. With higher capabilities than DVI standard, it is fully capable to support up to 15 metre cables and 10.8 Gbps/sec data transfer. With this high performance and zero latency, you get the fastest imaging and refresh rates — making DisplayPort the best choice for not only general office or home use, but also for

the more demanding gaming and films, video editing and more. It also keeps interoperability in mind via the use of various adapters.

VESA mount

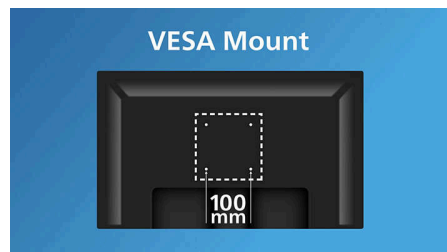

VESA mount allows for flexibility

SmartStand

Philips SmartStand allows for flexible adjustment of the screen. Its Z-type structure with smooth tilt, height adjustment and folding capabilities enables you to use it in various ergonomic positions. You can set the stand in upright position for better touch control or recline it backwards, making it easy for you to draw or annotate. It even allows you to put the screen almost flat on the table for some applications when required.



Specifications

Picture/Display

Panel Size: 21.5 inch/54.6 cm
 Aspect ratio: 16:9
 LCD panel type: VA LCD
 Backlight type: W-LED system
 Pixel pitch: 0.24825 x 0.248285 mm
 Optimum resolution: 1920 x 1080 @ 60 Hz
 Brightness: 250 cd/m²
 Display colours: 16.7 M
 Colour gamut (typical): NTSC 72%*
 Contrast ratio (typical): 3000:1
 SmartContrast: 50,000,000:1
 Response time (typical): 2 ms (Grey to Grey)*
 Viewing angle: 178° (H)/178° (V), @ C/R > 10
 Picture enhancement: SmartImage
 Effective viewing area: 476.64 (H) x 268.11 (V)
 Scanning Frequency: 30 -85 kHz (H)/48 -56 Hz (V)
 sRGB
 Flicker-free
 Pixel Density: 102 PPI
 LowBlue Mode
 EasyRead

Touch

Brightness: 210 cd/m²
 Ingress protection: IP65 - front only
 Operating system: Windows 11/10/8.1/8.0/7;
 Android 7.1/7.0/6.0/5.0/4.4
 Sealability: Touchscreen sealed to bezel;
 Touchscreen sealed to LCD
 Touch active area: 476.64 mm (H) x 268.11 mm (V)
 Touch glass hardness: 7 H
 Touch interface: USB
 Touch method: Stylus, Finger, Glove*
 Touchpoints: 10 points
 Touch technology: Projected capacitive
 Palm rejection area: >= 30 x 30 mm
 Touch glass coating: Glare

Connectivity

Signal Input: VGA (Analogue), DVI-D (digital), HDCP, DisplayPort 1.2, HDMI 1.4
 USB: USB 3.2 x 2 (1 w/fast charging)*
 Sync Input: Separate Sync, Sync on Green
 Audio (In/Out): PC audio-in, Headphone out
 HDCP: HDCP: HDCP 1.4 (HDMI/DP/DVI)

Convenience

Built-in Speakers: 2 W x 2
 Plug and Play Compatibility: DDC/CI, sRGB, Windows 11/10/8.1/8/7, Android 7.1/7.0/6.0/5.0/4.4
 User convenience: SmartImage, Input, Brightness, Menu, Power On/Off, SmartControl
 OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
 Other convenience: Kensington lock, VESA mount (100 x 100 mm)
 Tilt: -5~90 degrees
 Height Adjustment: 184 mm (horizontal), 76 mm (vertical)
 Control software: SmartControl
 Folding angle: 0~70 degrees

Stand

Height adjustment: 184 (Horizontal), 76 (Vertical) mm
 Tilt: -5~90 degree
 Folding angle: 0~70 degrees

Power

ECO mode: 13.2 W (typ.)
 Power supply: External, 100~240 VAC, 50~60 Hz
 Off mode: 0.3 W (typ.)
 On mode: 15.96 W (typ.) (Energy Star test method)
 Standby mode: 0.3 W (typ.)
 Power LED indicator: Operation - White, Standby mode - White (flashing)
 Consumption (economy mode): 13.0 W

Dimensions

Product with stand (mm): 515 x 394 x 226 mm
 Packaging in mm (W x H x D): 575 x 420 x 161 mm
 Product without stand (mm): 515 x 318 x 50 mm
 Product with stand (max height): 515 x 394 x 226 mm

Weight

Product with packaging (kg): 9.88 kg
 Product with stand (kg): 7.24 kg
 Product without stand (kg): 3.95 kg

Operating conditions

Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
 Temperature range (operation): 0°C to 40°C °C
 Relative humidity: 20%-80 %
 Temperature range (storage): -20°C to 60°C °C
 MTBF (demonstrated): 70,000 hrs (excluded backlight)

Sustainability

Environmental and energy: Energy Star 8.0, EPEAT Silver, TCO Certified, RoHS
 Recyclable packaging material: 100 %
 Specific Substances: PVC/BFR free housing, Mercury free

Compliance and standards

Regulatory Approvals: CB, CE Mark, Energy Star 8.0, ETL, CEC, MEPS, PSB, PSE, KC, EAC, CEL, CCC, CECP, BSMI, VCCI, UKCA, EMF, FCC, ICES-003

Cabinet

Finish: Texture
 Foot: Black/Black
 Front bezel: Black/Black
 Rear cover: Black/Black

What's in the box?

Cables: D-Sub cable, HDMI cable, DP cable, USB-A to B cable, Audio cable, Power cable
 User Documentation
 Accessory: Stylus (touch pen)



* Response time value equal to SmartResponse
 * Glove material and thickness: Nitrile (0.15 mm), Cotton (0.31 mm), CPE (0.03 mm), PVC (0.12 mm)
 * Please refer to "SmoothTouch" in the user manual for more details on operating system support when using the touch function.
 * Fast charging complies with USB BC 1.2 standard
 * EPEAT rating is valid only where Philips registers the product. Please visit <https://www.epeat.net/> for registration status in your country.
 * NTSC Area based on CIE1931
 * The products and accessories listed on this leaflet may differ by country and region.
 * The monitor may look different from feature images.