

Intracardiac Echocardiography (ICE) Catheter


VeriSight Pro features and specifications

Product specs

Catalog number	VSICE3D
Outer diameter	9F
Minimum sheath size	10F
Working length	90 cm
Articulating segment length	7.5 cm
Fixed distal tip length	2 cm
Deflection range	120°, 4-way deflection
Compatibility	EPIQ 7C, EPIQ CVx, EPIQ CVxi
Broadband frequency range	4 - 10 MHz
Type of array	xMATRIX
Number of elements	840
Field of view	90°
Volume field of view	90° x 90°


Imaging modes and features

2D imaging	Y
Live 3D echo (3D volume imaging, Live 3D color flow imaging)	Y
Spectral Doppler (PW/CW)	Y
iRotate echo (digital steering)	Y
Live xPlane imaging (default 90° sector width)	Y
>4x higher 3D frame rates	Y
Recall Settings (ICE/TEE fast switch)	Y
Image boost in 2D and MPRs	Y
xPlane Quick Angles (new default 0-90°)	Y
2D/3D image quality fly-outs	Y

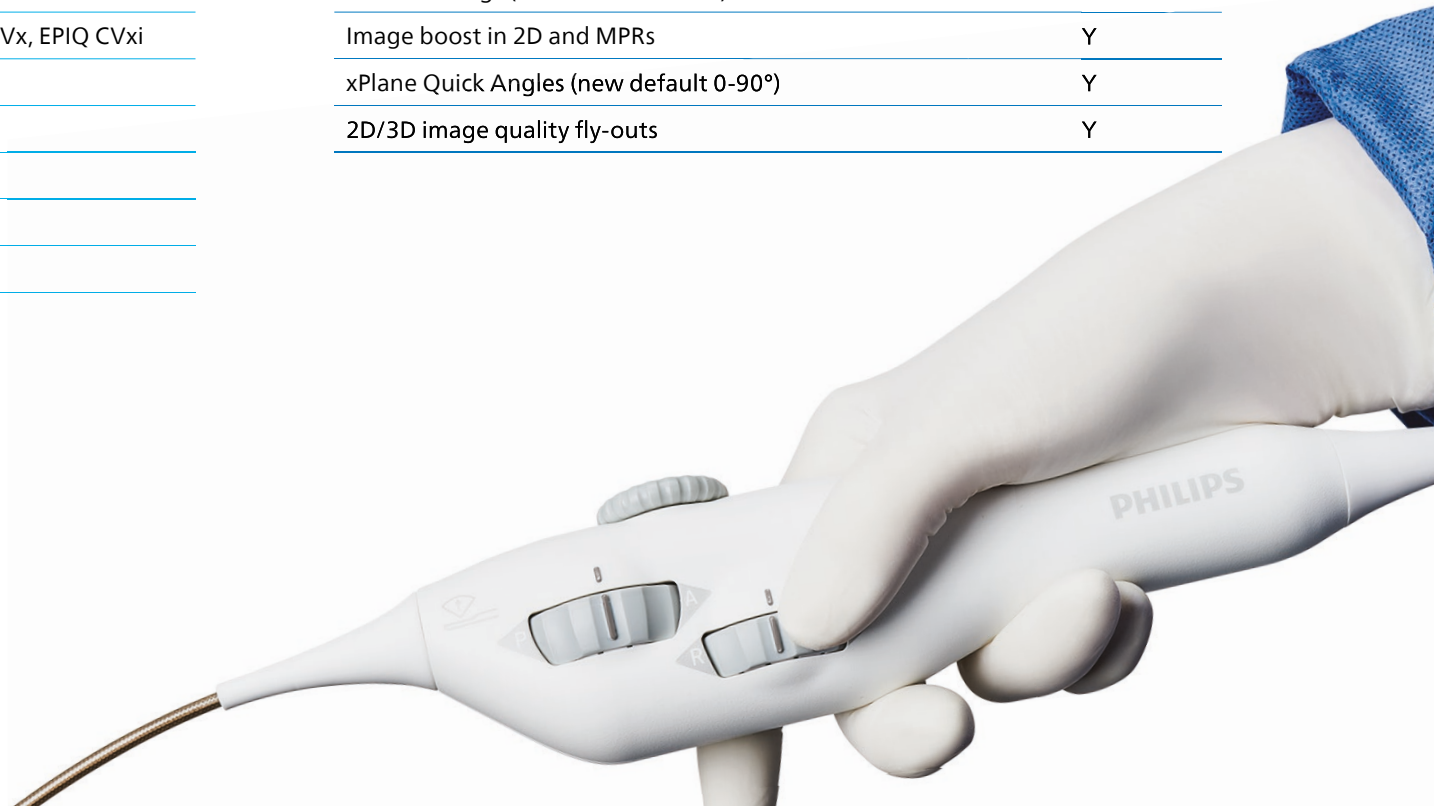

ICE system overview

Philips xMatrix ultrasound technology

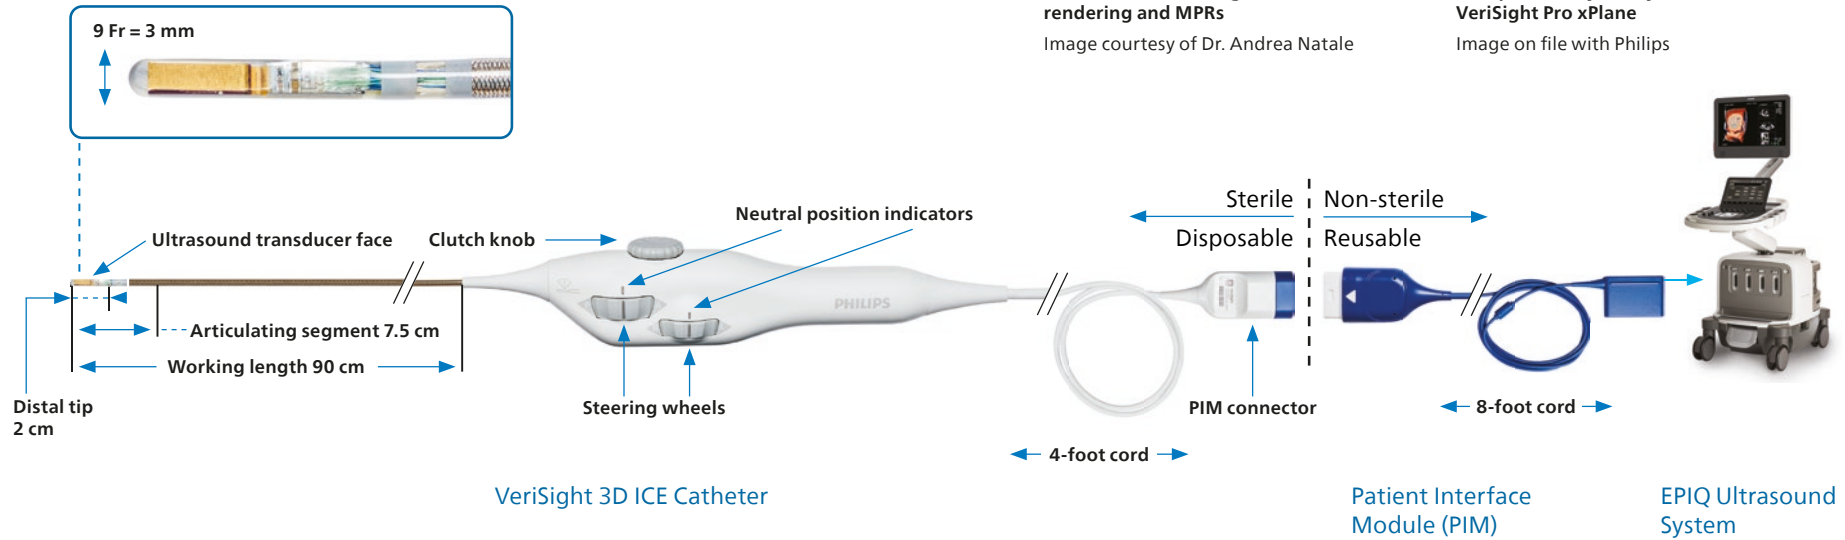

Learn more: philips.com/VeriSight

Indications for use

The VeriSight/VeriSight Pro ICE catheters are indicated for intracardiac and intra-luminal visualization and evaluation of cardiac and great vessel anatomy, and physiology, as well as visualization and guidance of devices during interventional cardiovascular procedures.

Always read the labels and follow the directions for use.

Products subject to country availability. Please contact your local sales representative.

© 2025 Koninklijke Philips N.V. All rights reserved.

All trademarks mentioned herein are the property of Koninklijke Philips N.V. Specifications are subject to change without notice. Approved for external use. D2025040301 (D057587-01 092024) * APR 2025

www.philips.com/IGTdevices



Philips Image Guided Therapy Corporation
9965 Federal Drive
Colorado Springs, Colorado, 80921 USA



Philips Medical Systems Nederland B.V.
Veenpluis 6
5684PC Best, The Netherlands