

PHILIPS

LCD monitor

Business Monitor

3000 series

24 (23.8" / 60.47 cm diag.)

1920 x 1080 (Full HD)

24B2N3200JH



Redefining workflow productivity

Speed through daily tasks in comfort with this monitor's SoftBlue technology and 120Hz refresh rate. Productivity-enhancing features like USB-C and adjustable webcam with Windows Hello deliver the performance and convenience you expect.

Designed for the way you work

- Built-in stereo speakers for multimedia
- Windows Hello Compatible – Seamless, Secure Access
- Smart Link Sync: Matches primary display on second screen
- Less eye fatigue with Flicker-free technology
- Eyesafe certified blue light protection and color accuracy
- Adjustable Webcam: for video conferencing in comfort.
- SoftBlue Technology: for comfortable viewing

Easy to experience


- VESA mount for convenience
- HDMI ensures universal digital connectivity

Superb Picture Quality

- 120Hz refresh rates for ultra-smooth images
- 16:9 Full HD display for crisp detailed images
- IPS LED wide view technology for image and color accuracy

Highlights

IPS technology

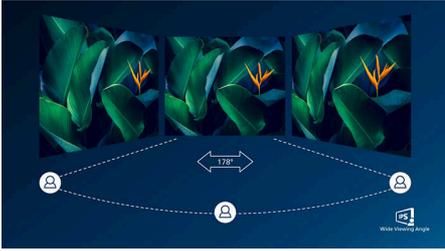

IPS displays use an advanced technology which gives you extra wide viewing angles of 178/178 degree, making it possible to view the display from almost any angle. Unlike standard TN panels, IPS displays gives you remarkably crisp images with vivid colors, making it ideal not only for Photos, movies and web browsing, but also for professional applications which demand color accuracy and consistent brightness at all times.

16:9 Full HD display



Picture quality matters. Regular displays deliver quality, but you expect more. This display features enhanced Full HD 1920 x 1080 resolution. With Full HD for crisp detail paired with high brightness, incredible contrast and realistic colors expect a true to life picture.

120Hz Fast refresh



For gaming and video performance, you demand display with lag free, ultra-smooth images. This Philips display redraws the screen image up--to 120 times per second, much faster than a standard display. A lower frame rate can make enemies appear to jump from spot to spot on the

screen, making them difficult targets to hit. With 120Hz frame rate, you get those critical missing images on the screen which shows enemy movement in ultra-smooth motion so you can easily target them.

SoftBlue Technology with Low Blue Light Panel



SoftBlue technology offers increased visual comfort and protection against adverse health effects caused by prolonged exposure to blue light. With the low blue-light panel, the ratio of display emission light in the range of 415-455 nm to 400-500nm is reduced to less than 50%. As a result, the SoftBlue technology provides optimal visual comfort, minimizes eye strain, and supports sustained focus. Not to mention, SoftBlue LED technology is tested and TÜV Rheinland Low Blue Light (Hardware Solution) certified for its effectiveness in reducing blue light emissions.

Built-in stereo speakers



A pair of high quality stereo speakers built into a display device. It can be visible front firing, or invisible down firing, top firing, rear firing, etc depending on model and design.

Flicker-free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-free Technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

eyesafe® CERTIFIED 2.0 (RPF 50)



The Philips display meets the eyesafe® CERTIFIED 2.0 standard to truly protect you from the long exposure to blue light. The always-on blue light filter not only helps reduce digital eye strain, but also guarantees color integrity.

Smart Link Sync Second Screen Harmony



When connected as a secondary monitor in a daisy-chain setup with a Smart Link Sync enabled primary display, brightness and color settings are automatically synchronized. There is no manual adjustments needed. Whether you're designing, presenting, or multitasking, enjoy seamless visual consistency across screens. Choose from OSD Sync or Light Sync modes (Low, Mid, or High) in the primary monitor to match your environment.



Highlights

Adjustable Webcam



Level up the comfort of video conferencing with this feature. By adjusting the webcam back and forth by 30 degrees, users can now comfortably call and attend meetings from any position that best suits them.

Windows Hello Compatible



Log in faster and more securely with Windows Hello. The webcam on this Philips monitor is compatible with Windows Hello, offering quick facial recognition and effortless access - every time you power on.

HDMI Ready



An HDMI-ready device has all the required hardware to accept High-Definition Multimedia Interface (HDMI) input. A HDMI cable enables high-quality digital video and audio all transmitted over a single cable from a PC or any number of AV sources (including set-top boxes, DVD players, A/V receivers and video cameras).

Specifications

Picture/Display

Panel Size: 23.8 inch / 60.47 cm

Aspect ratio: 16:9

LCD panel type: IPS technology

Backlight type: W-LED system

Pixel pitch: 0.2745(H)mm x 0.2745(V)mm

Brightness: 300 cd/m²

Display colors: 16.7M (8 bits)

Color gamut (typical): sRGB 110%, NTSC 96%.*

Contrast ratio (typical): 1500:1

SmartContrast: 50,000,000:1

Response time (typical): 4 ms (Gray to Gray)*

Viewing angle: 178° (H) / 178° (V), @ C/R > 10

Picture enhancement: SmartImage

Maximum resolution: 1920x1080@75Hz(VGA),

1920x1080@120Hz(HDMI/DP)

Effective viewing area: 527.04(H)x296.46(V) mm

Scanning Frequency: VGA: 30 KHz - 85 KHz (H)/

48 Hz - 75 Hz; HDMI/DP: 30k - 140 kHz (H) / 48

Hz - 120 Hz (V)

sRGB

SoftBlue

Flicker-free

Pixel Density: 93 PPI

Display Screen Coating: Anti-Glare, 3H, Haze

25%

EasyRead

Adaptive sync

EyeSafe

Smart Link Sync: When used as a secondary monitor only*

Connectivity

Signal Input: VGA x1, HDMI 1.4 x 1, DisplayPort 1.2 x 1

Sync Input: Separate Sync, Sync on Green

Audio (In/Out): Audio out

Audio (In/Out): Audio-in

HDCP: HDCP 1.4 (HDMI / DisplayPort)

USB Hub: USB3.2, Gen1, 5G, upstream: 1x USB-B;

downstream: USB-A x3 (with x1 fast charge B.C

1.2), USB-C x1 (data, 15W)

Convenience

Built-in Speakers: 2Wx2

Plug & Play Compatibility: DDC CI, Mac OS, sRGB,

Windows 11 / 10

User convenience: SmartImage, Input,

Brightness, Menu, Power On/Off

OSD Languages: Brazil Portuguese, Czech, Dutch, English, French, Finnish, German, Greek, Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian

Other convenience: Kensington lock, VESA mount (100x100mm)

Control software: SmartControl*

Built-in webcam: 5.0 megapixel camera with microphone and LED indicator (for Windows Hello)

Webcam tilt function: Yes, +/-30 degree

Stand

Height adjustment: 150 mm

Pivot: +/-90 degree

Swivel: +/-180 degree

Tilt: -5/30 degree

Power

ECO mode: 7.6 W (typ.)

Power supply: Built-in, 100-240VAC, 50-60Hz

Off mode: 0.3 W (typ.)

On mode: 13.09 (typ.) (EnergyStar test method)

Standby mode: 0.3 W (typ.)

Power LED indicator: Operation - White, Standby mode- White (blinking)

Energy Label Class: C

Dimensions

Packaging in mm (WxHxD): 615 x 420 x 139 mm

Product without stand (mm): 542 x 320 x 48 mm

Product with stand(max height): 542 x 449 x

228 mm

Weight

Product with packaging (kg): 7.73 kg

Product with stand (kg): 5.59 kg

Product without stand (kg): 3.93 kg

Operating conditions

Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)

Temperature range (operation): 0°C to 40 °C

Relative humidity: 20%-80 %

Temperature range (storage): -20°C to 60 °C

MTBF (demonstrated): 70,000 hrs (excluded backlight)

Sustainability

Environmental and energy: RoHS, Energy Star, EPEAT*

Post consumer recycled plastic: 85%

Recyclable packaging material: 100 %

Specific Substances: PVC / BFR free housing, Mercury free

Compliance and standards

Regulatory Approvals: CB, CE Mark, TUV/GS, TUV Ergo, TCO Certified, EAC, EAC ROHS, MEPS, UKCA, EMF, FCC, ICES-003, TÜV Rheinland Low Blue Light (Hardware Solution), eyesafe® CERTIFIED 2.0

Cabinet

Finish: Texture

Foot: Black

Front bezel: Black

Rear cover: Black



* Response time value equal to SmartResponse

* sRGB Area based on CIE1931, NTSC Area based on CIE1976.

* The SmartControl software is compatible with Windows operating systems only.

* This monitor supports Smart Link Sync only when used as a secondary monitor in a daisy-chain configuration, connected to a primary monitor that also supports Smart Link Sync.

* EPEAT rating is valid only where Philips registers the product. Please visit <https://www.epeat.net/> for registration status in your country.

* The monitor may look different from feature images.

* The products and accessories listed on this leaflet may differ by country and region.