



3 Enjoy


1 Main Menu

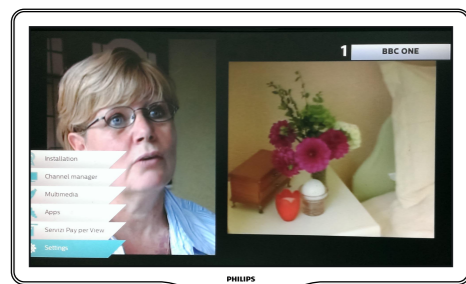


If you wish to have access to all the product functionalities, click on the **MENU** key and use the navigation keys.




2 Record a program

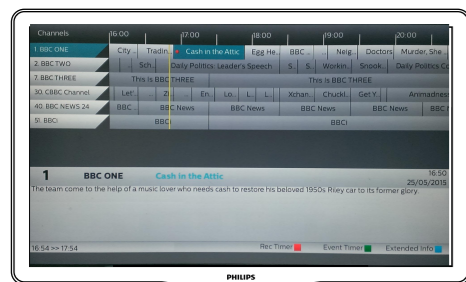


Press TV Guide to select the program and launch it by using the record or **OK** key. Confirm with **OK**.



3 Read a recorded a program

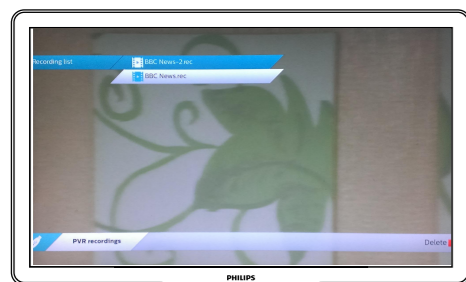

Press library key to select the recorded program and launch it by using the **OK** or play key.



HDMI, HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. PHILIPS and the PHILIPS' Shield Emblem are registered trademarks of Koninklijke Philips Electronics N.V. and are used by Sagemcom Broadband SAS under license from Koninklijke Philips Electronics N.V. © 2012 Sagemcom Broadband SAS All rights reserved

Sagemcom Broadband SAS
Broadband Business Unit

Headquarters : 250, route de l'Empereur
92500 Rueil-Malmaison Cedex - FRANCE
Tel: +33 (0)1 57 61 10 00 - Fax: +33 (0)1 57 61 10 01
www.sagemcom.com
Simplified Joint Stock Company - Capital 35.703.000 € - 518 250 360 RCS Nanterre

Register your product and get support at
www.philips.com/welcome

HDTP 8530
HDTP 8540



Quick start guide

- 1 Connect
- 2 Install
- 3 Enjoy



1





1



2



1 Connect

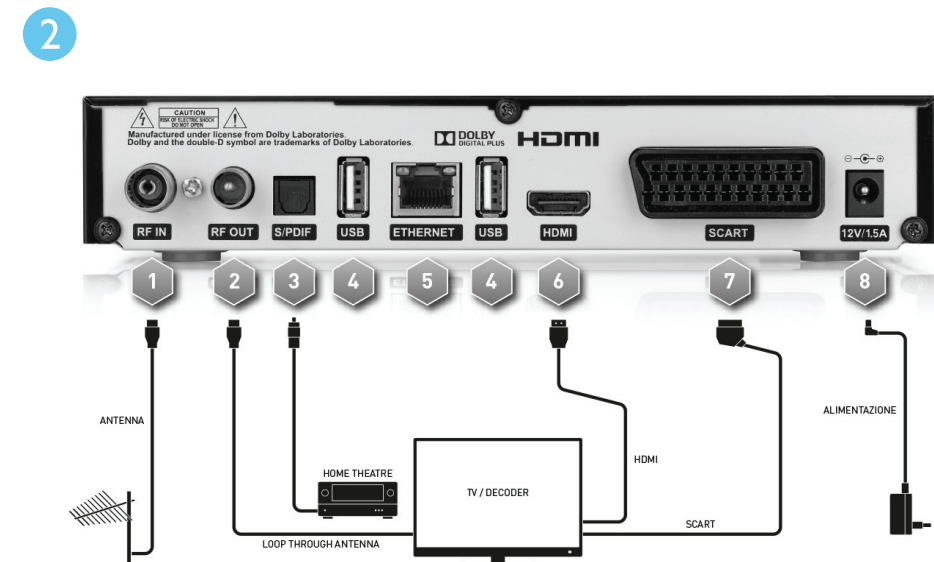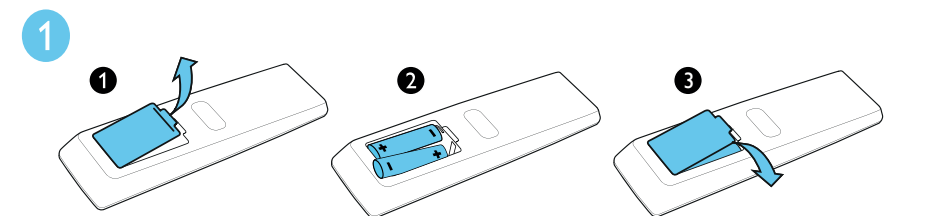

1. **RF IN** antenna input signal.
2. **RF OUT** output signal through antenna for connecting a device with a digital TV tuner terrestrial (optional).
***WARNING**
When the receiver is in the energy-saving standby (par. 3.6.1.5), the output loop antenna. It is not active.
3. **S/PDIF** optical digital audio amplifiers for multichannel audio Home-Theater (optional).
4. **USB** USB connectors for reading personal multimedia content (video, images, music) and video from integrated digital terrestrial tuner where permitted by transmission.
***WARNINGS**
· Compatible with USB storage devices formatted with file systems FAT16, FAT32 and NTFS.

- It can not guarantee compatibility with all USB storage devices on the market.
- We recommend using Hard Disk USB with external power supply, because the receiver can not guarantee proper nutrition via the USB port. This will allow you to avoid any damage of the memory device.

5. **ETHERNET** Ethernet interface to connect to your modem / router for the data
6. **HDMI** output audio-video digital HDMI for high definition, dedicated to the connection of a screen provided with HDMI is compatible with HDCP.

***NOTE**


If the screen connected to the receiver via HDMI interface presents difficulty in viewing, connect the receiver through SCART and adjust the video resolution in Settings > Configurations Receiver > Settings A/V receiver of the same, respecting the characteristics of the screen connected.

7. **SCART** output audio-video analog SCART standard resolution for connection to a screen/TV, Alternatively to the HDMI output.
8. **12V/1.5A** power input 12V = 1.5A, for connecting the supplied which in turn goes connected to an outlet of 230V ~ 50Hz.


2 Install



Use the remote control to navigate through the menu. Confirm with **OK**.



1 First Installation

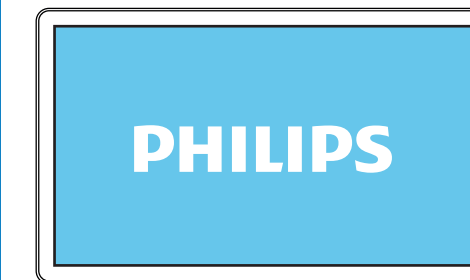

Choose your language

Language

Choose your time


Time

Select your Pin Code


Pin Code

Select your AV Settings

AV Settings

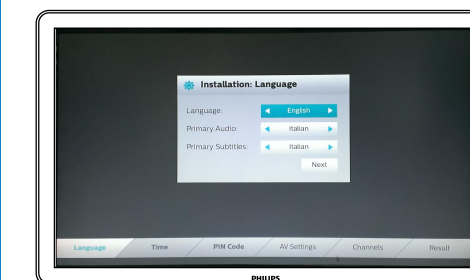


2 Channel Search

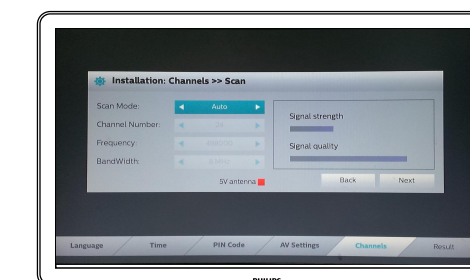


Once the first installation complete, the channel search will be automatically launched.

3

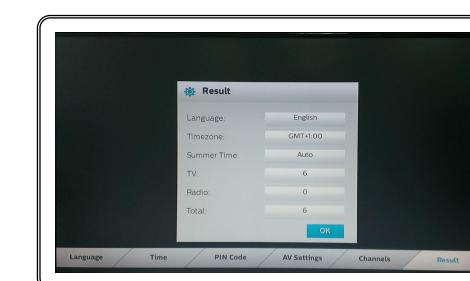

For finalising, your recorder installation selection your region and validate with **OK**.



For more information, please see the user guide provided with your equipment or visit our website: www.philips.com/welcome