

### Wall mounting instructions

## Drill holes on wall at hole positions marked (no accessories provided with this template)



### What's in the supplied mounting kit



1 x wall mount template

### What else you'll need

- Flectric drill
- 2 x screws and dowels
- Screwdriver
- Pencil


#### Mount the main unit




- To find a suitable mounting location, make the necessary physical and wireless connections.
- Mount the main unit and speakers to a solid concrete wall or plaster board wall only!

You can use the supplied bracket to mount the main unit and speakers to the wall.


**1** Align the template in the chosen location on a wall. Use a pencil to mark the drilling positions.



2 Drill holes as marked.




3 Secure 2 supplied screws in the holes, but leave 5mm between the screw head and the wall.




4 Detach the table stand from the main unit.



5 Hook the main unit in place.



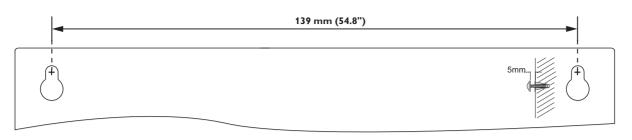

## 壁掛安裝指示

# 已此墊紙為樣本在牆上鑚洞(未隨附任何樣本配件)。



#### 安裝套件隨附物品:



1個壁掛板

#### 您還需要

- 雷鑽
- 2個螺絲和暗榫
- 螺絲起子
- 鉛筆


#### 掛置主裝置




- 找到合適的架設位置,並完成必要的實體連線和無線連線。
- 掛置主裝置和揚聲器的牆面必須為堅固的混凝土牆或石膏 板纏!

您可使用隨附的支架將主裝置與揚聲器固定到 牆上。


**1** 將壁掛板對準牆上選定的安裝位置。 用鉛 筆標記鑽孔位置。




2 在標記的位置上鑽孔。



**3** 將 2 顆隨附的螺絲鎖入孔中,螺絲頭與牆面之間保留 5 公釐間隙。



4 主裝置的桌面腳架拆下。



5 將主裝置掛到牆上。

