



Inform. Effortlessly

Smart, powerful 24/7 display.

Make it clear with a powerful D-Line professional FHD display. This responsive solution offers brilliant picture quality, simple control and reliable connectivity. Even in areas that are hard to network.

Brilliant picture. Blazing processor speed.

- Android SoC processor. Native and web apps
- Full HD. Clear images. Crisp contrast
- IPS panel: rich colour consistency from every angle
- Place in landscape or portrait orientation

Effortless setup. Total control.

- Operate, monitor and maintain with CMND and Control
- CMND and Create. Develop and launch your own content
- CMND & Deploy. Install and launch apps remotely
- Proof of Play for Android content. Know what's playing
- Integrated mPCIe slot for optional 4G/LTE module

Cost-effective system solution

- Energy-saving automatic backlight control
- Integrated HTML5 browser. Play and control online content
- Internal memory. Upload content for instant play

D-Line Display 65BDL4050D/00

Highlights

Powered by Android

Control your display via an Internet connection. Android-powered Philips Professional Displays are optimised for native Android apps and you can install web apps directly to the display too. A new Android OS ensures the software is kept secure and stays up to date with the latest specification for longer.

CMND and Control



Run your display network over a local (LAN) connection. CMND and Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

CMND and Create



Take control of your content with CMND and Create. A drag-and-drop interface makes it simple to publish your own content, whether it's

a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure that your stills, text and video will be up and running in no time.

CMND & Deploy

Quickly install and launch any app - even when you're off site and working remotely. CMND & Deploy lets you add and update your own apps, as well as apps from the Philips Professional Display App Store. Simply scan the QR code, log in to the store and click on the app you want to install. The app will be automatically downloaded and launched.

Integrated mPCIe slot

Easily connect 4G/LTE modules to your Philips professional display. The integrated mPCle slot enables your display to communicate with other devices that share the same wireless connectivity. Invaluable if you're installing displays in locations such as banks or government buildings, where you cannot access the local network.

FailOver





From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs, ensuring that content keeps playing even if the primary source goes down. Simply set a list of alternative inputs to be sure your business is always on.

Proof of Play

Be sure your Android-powered Philips
Professional Display is showing the right contenteven when you're not there. When
playing content via the embedded media player,
you can set up your display to take automatic
screenshots at regular intervals. Screenshots are
stored on the display's internal memory, and you
can choose to receive them via email.

D-Line Display 65BDL4050D/00

Specifications

Picture/Display

Diagonal screen size (metric): 166.37 cm Diagonal screen size (inch): 65.5 inch

Aspect ratio: 16:9

Panel resolution: 1920 x 1080p Pixel pitch: 0.744 x 0.744 mm

Optimum resolution: 1920 x 1080 @ 60 Hz

Brightness: 450 cd/m²
Display colours: 16.7 million
Contrast ratio (typical): 1100:1
Dynamic contrast ratio: 500,000:1
Response time (typical): 12 ms
Viewing angle (horizontal): 178 degree
Viewing angle (vertical): 178 degree
Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens.
deinterlacing, 3D MA deinterlacing, Dynamic contrast enhancement, Progressive scan
Operating system: Android 4.4.4

Connectivity

Audio output: Audio Left/Right (RCA), Ext.

speaker cntrl (aud. out)

Video input: DisplayPort (1.2), HDMI (x 2), DVI-D,

USB, VGA (via DVI)

Audio input: 3.5 mm jack, Audio Left/Right (RCA)

Other connections: mPCle, micro SD, micro USB,

USB power outlet (5 V. 2 amp)

Video output: DisplayPort, DVI-I, VGA (via DVI-D) External control: RJ45, RS232C (in/out) 2.5 mm

jack, IR (in/out) 3.5 mm jack

Convenience

Placement: Landscape (24/7), Portrait (24/7)

Picture in picture: PIP Tiled Matrix: Up to 15 x 15

Screen-saving functions: Pixel Shift, Low Bright

Keyboard control: Hidden, Lockable

Signal loop through: DVI, VGA, RS232, IR Loop

through, DisplayPort

Ease of installation: Smart Insert
Energy-saving functions: Smart Power
Network controllable: RJ45, RS232, One Wire

(HDMI-CEC), HDMI (One Wire)

Sound

Built-in speakers: 2 x 10 W RMS

Power

Consumption (EPA 6.0): 99 W

Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz

Consumption (Typical): 103 W

Standby power consumption: <0.4 W

Supported Display Resolution

Computer formats: 1920 x 1080, 60 Hz, 1440 x 900, 60 Hz, 1366 x 768, 60 Hz, 1360 x 768, 60 Hz, 1280 x 800, 60 Hz, 1280 x 768, 60 Hz, 1024 x 768, 60 Hz, 800 x 600, 56, 60, 72, 75 Hz, 640 x 480, 60, 67, 72, 75 Hz

Video formats: 1080p, 50, 60 Hz, 1080i, 50, 60 Hz, 720p, 50, 60 Hz, 576i, 50 Hz, 576p, 50 Hz, 480p, 60 Hz, 480i, 60 Hz

Dimensions

Smart Insert mount: 100 x 100 mm,

100 x 200 mm

Set Width: 1452.0 mm Product weight: 29.8 kg Set Height: 833.1 mm Set Depth: 63.5 mm

Set Depth: 63.5 mm Set Width (inch): 57.17 inch Set Height (inch): 32.80 inch Wall Mount: 400 x 400, M6 Set Depth (inch): 2.50 inch Bezel width: 9.5 (T/L/R) 15.6 (B) Product weight (lb): 65.7 lb

Operating conditions

Altitude: 0 ~ 3000 m

Temperature range (operation): 0 ~ 40 °C

MTBF: 50,000 hour(s)
Relative humidity: 20 ~ 80 %

Temperature range (storage): -20 ~ 60 °C

Multimedia Applications

USB Playback Video: M2TS, M4V, MK3D, MKV, MP4, MPEG, MPG, MTS, TS, TTS, VOB, WMV USB Playback Picture: BMP, GIF, JPEG, JPG, PDF USB Playback Audio: AAC, AIF, AIFF, M4A, MP3, WAV, WMA, ASF, LPCM, M3U, MP4

VVAV, VVIVIA, ASI, El CIVI, IVISO, IV

Internal Player

CPU: Quad Core Cortex A9 1.8 GHz GPU: ARM Mali400 Quad Core 533 MHz

Memory: 2 GB DDR3 Storage: 16 GB EMMC

Accessories

Included accessories: Remote Control, Batteries for remote control, Quick start guide, RS232

cable, AC Power Cord

Optional accessories: ColourCalibrationKit

(CCK4602)

Stand: Universal Stand (L) (BM05922) (Optional)


Miscellaneous

On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Danish, Dutch, Finnish, Norwegian, Portuguese, Swedish

Warranty: 3 year warranty

Regulatory approvals: EnergyStar 7.0, CE, FCC, Class B, UL/cUL, CCC, C-Tick, RoHS, GOST, BSMI,

CB, J-Moss, PSE, VCCI

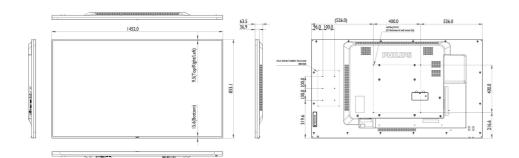

© 2025 Koninklijke Philips N.V. All Rights reserved. Issue date 2025-02-10 Version: 5.0.1

EAN: 87 12581 73999 7

www.philips.com



Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.