



Philips
LCD monitor

43 cm (17")
SXGA

170S8FB

Compact display, rich performance on your budget

Optimized performance and convenience made affordable: Packed with smart features for enhanced display, the compact 170S8 also features SmartManage remote monitor management and green design that delivers the best total cost of ownership.

Maximum comfort for maximum productivity

- Screen tilts to your ideal, individualized viewing angle

Outstanding front of screen performance

- 5ms fast response time
- SmartContrast: For incredible rich black details
- SmartImage: Optimized user-friendly display experience

Great convenience

- Dual input accepts both analog VGA and digital DVI signals
- Hassle-free display performance tuning with SmartControl II
- Cable management reduces cable clutter for neat workspace

Best total cost of ownership solution

- SmartManage compatibility enables LAN-based asset management
- PerfecTune ensures top quality LCD display delivered to you
- TCO'03 guarantees the highest safety and ergonomic standards
- Empowered for Windows Vista

PHILIPS

LCD monitor
43 cm (17") SXGA

170S8FB/75

Highlights

SmartManage enabled

SmartManage is a system for monitoring, managing and checking status of display devices as well as delivering remote support to users who experience difficulties - all accomplished over a LAN.

PerfectTune

PerfectTune is industry-leading, proprietary Philips testing and algorithm technology for monitor adjustment and fine tuning, an extensive process that ensures ultimate display performance in compliance with a standard four-times more stringent than Microsoft's Vista requirements from each and every monitor that leaves the factory - not just a few review samples. Only Philips goes to these lengths to deliver this exacting level of color accuracy and display quality in every new monitor.


Windows Vista ready

Philips Vista-ready monitors are empowered for vibrant, exciting display of this new, visually sophisticated and demanding Windows operating system, designed to enhance your entertainment experience, make you more productive and help you control your computing experience at home and in the office, making viewing, finding and organizing information for work or play quick, efficient and easy.

TCO '03 compliance

A TCO (Swedish Confederation of Professional Employees) standard even more stringent than MPR-II for safety and ergonomics, especially concerning alternating electric fields (AEF).

SmartImage

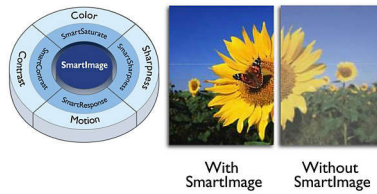

SmartImage is an exclusive leading edge Philips technology that analyzes the content displayed on your screen and gives you optimized display performance. This user friendly interface allows you to select various modes like Office, Image, Entertainment, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimizes the contrast, color saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time with the press of a single button!

SmartContrast



SmartContrast is a Philips technology that analyzes the contents you are displaying, automatically adjusting colors and controlling backlight intensity to dynamically enhance contrast for the best digital images and videos or when playing games where dark hues are displayed. When Economy mode is selected, contrast is adjusted and backlighting fine-tuned for just-right display of everyday office applications and lower power consumption.

5ms on/off response time

On-Off response time is the period required for a liquid crystal cell to go from active (black) to inactive (white) and back to active (black) again. It is measured in milliseconds. Faster is better: Lower response time means faster transitions and, therefore, results in fewer

visible image artifacts in the display of transition of texts and graphics. On-Off response time is a more important measure in the display of business content like documents, graphs and photos.

Adjustable tilt

Adjustable tilt is backward and forward movement of a screen on its base to achieve custom positioning for an ideal viewing angle and more comfort for people who spend long hours working on the computer.

Dual input




Dual input provides connectors to accommodate input of both analog VGA and digital DVI signals.

SmartControl II

SmartControl II is monitor-based software with an easy-to-use on-screen graphic interface that guides you through fine-tuning resolution, color calibration and other display settings including brightness, contrast, clock & phase, position, RGB, white point and - on models with onboard speakers - volume adjustments.

Cable management

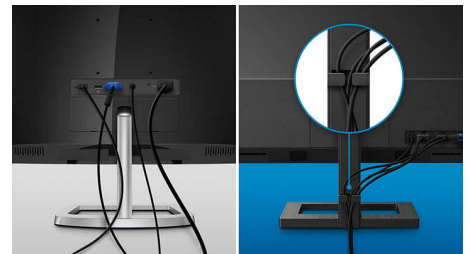

Cable management is an intimate design that maintains tidy workspace by organizing cables and wires required for the operation of a display device.



Specifications

Connectivity

- Signal Input: VGA (Analog), DVI-D
- Sync Input: Composite Sync, Separate Sync, Sync on Green
- Sync input impedance: 2.2k ohm
- Video input impedance: 75 ohm
- Video input signal levels: 0.7 Vpp

Picture/Display

- Panel Size: 17"/ 43 cm
- LCD panel type: 1280 x 1024 pixels, Anti-glare polarizer, RGB vertical stripe
- Pixel pitch: 0.264 x 0.264 mm
- Optimum resolution: 1280 x 1024 @ 60 Hz
- Brightness: 300 cd/m²
- Display colors: 16.7 M
- Contrast ratio (typical): 800:1
- SmartContrast ratio (dynamic): 3000:1
- Response time (typical): 5 ms
- Viewing angle: 176° (H) / 170° (V), @ C/R > 5
- Picture enhancement: SmartImage
- Horizontal Scanning Frequency: 30 - 83 kHz
- Vertical Scanning Frequency: 56 - 75 Hz
- Maximum Resolution: 1280 x 1024 @ 75 Hz
- Effective viewing area: 337.9 x 270.3 mm
- sRGB
- Video Dot Rate: 140 MHz
- White Chromaticity, 6500K: x = 0.313 / y = 0.329
- White Chromaticity, 9300K: x = 0.283 / y = 0.297

Convenience

- Plug & Play Compatibility: DDC/CI, sRGB, Windows 98/ME/2000/XP/Vista
- User convenience: On-screen Display, SmartManage enabled, SmartControl II
- Monitor Controls: SmartImage, Input, Auto (Back), Power On/Off, Brightness Control (Up/Down), Menu (OK)
- Regulatory approvals: CE Mark, EMC, Energy Star, FCC-B, UL, CSA, SEMKO, TÜV/GS, TÜV Ergo, TCO '03
- OSD Languages: English, French, German, Italian, Portuguese, Russian, Simplified Chinese, Spanish
- Other convenience: Kensington lock compatible, FlexiHolder

- Tilt: -5° to 20°
- VESA Mount: 100 x 100 mm

Power

- Power supply: Built-in, 100-240VAC, 50/60Hz
- Consumption (On mode): < 33 W (Typical)
- Power LED indicator: Operation - green, Stand by/ sleep - Amber
- Complies with: Energy Star
- Consumption (Off Mode): < 1 W
- Consumption (economy mode): 27 W

Dimensions

- Box depth: 174 mm
- Set width (with stand): 379.3 mm
- Box height: 394 mm
- Set width (with stand) (inch): 14.9 inch
- Box width: 451 mm
- Set height (with stand): 387.1 mm
- Set height (with stand) (inch): 15.2 inch
- Set Width: 379.3 mm
- Set depth (with stand): 211.1 mm
- Set Height: 327.1 mm
- Set Depth: 57.5 mm
- Set depth (with stand) (inch): 8.3 inch
- Set Width (inch): 14.9 inch
- Temperature range (operation): 0°C to 40°C
- Set Height (inch): 12.9 inch
- Temperature range (storage): -20°C to 60°C
- Set Depth (inch): 2.3 inch
- Box depth (inch): 6.9 inch
- Box height (inch): 15.5 inch
- Box width (inch): 17.8 inch
- Product weight (+stand): 3.64 kg
- Product weight (+stand) (lb): 8.03 lb
- Weight incl. Packaging: 4.56 kg
- Weight incl. Packaging (lb): 10.1
- Relative humidity: 20% - 80%
- MTBF: 50,000 hrs

Accessories

- Included accessories: AC Power Cord, VGA cable
- User Manual
- Optional accessories: Super Ergo Base



Issue date 2024-03-23

Version: 3.0.5

EAN: 87 12581 30187 3

© 2024 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com