



Philips Brilliance
4K Ultra HD LCD display
with MultiView

40" (101.6 cm)
3840 x 2160 (4K UHD)



BDM4037UW

See the big picture with all the details

with 4K Ultra HD

The expansive 40" class Ultra-HD professional Philips display gives you the room to spread out and see the big picture and all the details in 4K Ultra-High Definition (four times the resolution of full HD)

Expand your viewing experience

- SmartImage pre-sets for easy optimised image settings
- UltraClear 4K UHD (3840 x 2160) resolution for precision
- VA display delivers awesome images with wide viewing angles
- MultiView 4K for 4 systems on one screen
- Less eye fatigue with Flicker-Free technology
- Ultra Wide-Color wider range of colours for a vivid picture
- 1.074 billion colours for smooth colour gradations and detail

Designed for the way you work

- MHL technology for enjoying mobile content on a big screen
- Built-in stereo speakers for multimedia
- Slim bezel design for a stylish look
- USB 3.0 Hub for convenient access and fast charging
- SmartConnect with DisplayPort, HDMI and VGA connections

PHILIPS

4K Ultra HD LCD display with MultiView
40" (101.6 cm) 3840 x 2160 (4K UHD)

BDM4037UW/00


Highlights

Curved display design




Desktop monitors offer a personal user experience, which suits a curved design very well. The curved screen provides a pleasant yet subtle immersion effect, which focuses on you at the centre of your desk.

UltraClear 4K UHD Resolution

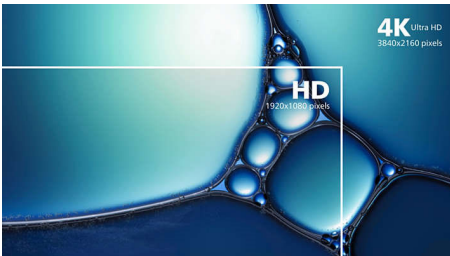

These Philips displays utilise high-performance panels to deliver UltraClear, 4K UHD (3840 x 2160) resolution images. Whether you are a demanding professional requiring extremely detailed images for CAD solutions, a user of 3D graphics applications or a financial wizard working on huge spreadsheets, Philips displays will make your images and graphics come alive.


Ultra Wide-Color Technology

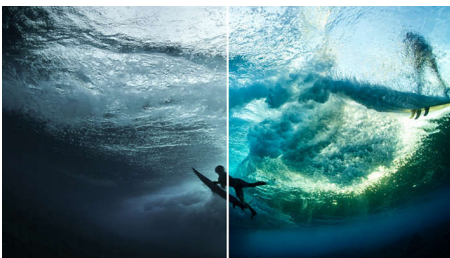

Ultra Wide-Color Technology delivers a wider spectrum of colours for a more brilliant


picture. The Ultra Wide-Color wider "colour gamut" produces more natural-looking greens, vivid reds and deeper blues. Bring media entertainment, images and even productivity more alive with vivid colours from Ultra Wide-Color Technology.

VA display

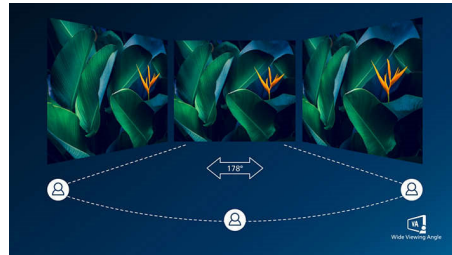

The Philips VA LED display uses an advanced multi-domain vertical alignment technology that gives you super-high static contrast ratios for extra-vivid and bright images. While standard office applications are handled with ease, it is especially suitable for photos, web browsing, films, gaming and demanding graphical applications. Its optimised pixel management technology gives you a 178/178 degree extra-wide viewing angle, resulting in crisp images.

MultiView technology for 4K

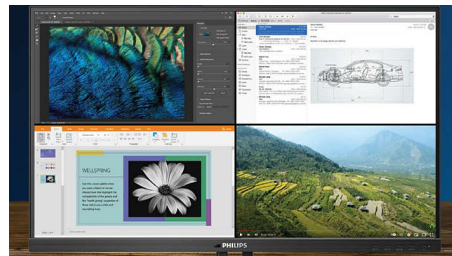

Philips MultiView feature on this expansive 4K UHD display enables you to have up to four systems each shown in Full HD on one screen. You can use Picture-by-Picture (PbP) to monitor four systems on one screen for control rooms or security. Or for multiple devices like two notebooks side-by-side

simultaneously, making collaboration more productive. Or Picture-in-Picture mode (PiP) watching a live football feed from your set-top box, while working on your PC.

SmartImage



SmartImage is an exclusive leading edge Philips technology that analyses the content displayed on your screen and optimises your display performance. This user-friendly interface allows you to select various modes, like Office, Photo, Movie, Game, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimises the contrast, colour saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time at the touch of a single button!

Flicker-Free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-Free technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.



Specifications

Connectivity

- Signal Input: VGA (Analogue), DisplayPort x 2, HDMI (1.4) - MHL x 1, HDMI (2.0) — MHL x 1
- USB: USB 3.0x4 (1 w/fast charging)*
- Sync Input: Separate Sync, Sync on Green
- Audio (In/Out): PC audio-in, Headphone out

Picture/Display

- Panel Size: 40 inch/101.6 cm
- Aspect ratio: 16:9
- LCD panel type: VA LCD
- Backlight type: W-LED system
- Pixel pitch: 0.230 x 0.230 mm
- Optimum resolution: 3840 x 2160 @ 60 Hz
- Brightness: 300 cd/m²
- Display colours: Colour support 1.07 billion colours (Dithered 10 bits)
- Colour gamut (typical): NTSC 100% (CIE1976)*
- Contrast ratio (typical): 4000:1
- SmartContrast: 20,000,000:1
- Response time (typical): 4 ms (Grey to Grey)*
- Viewing angle: 178° (H)/178° (V), @ C/R > 10
- Picture enhancement: SmartImage
- Effective viewing area: 884.74 (H) x 497.66 (V) - at a 3000R curvature*
- Scanning Frequency: 30–99 kHz (H) - VGA/HDMI, 30–160 kHz (H) - DisplayPort / 56–80 Hz (V) - VGA, 23–80 Hz (V) - HDMI/DisplayPort
- sRGB
- MHL: 1080P @ 60 Hz
- Flicker-free
- Pixel Density: 110 PPI

Convenience

- Built-in Speakers: 5 W x 2
- Plug and Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 10 / 8.1 / 8 / 7
- User convenience: SmartImage, Multi-view, User, Menu, Power On/Off
- OSD Languages: Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian, Brazil Portuguese, Czech
- Other convenience: Kensington lock, VESA mount (100 x 100 mm)
- Control software: SmartControl
- MultiView: PBP (4 x devices), PIP (2 x devices)

Stand

- Tilt: -5/10 degree

Power

- ECO mode: 32.61 W
- Power supply: Built-in, 100–240 VAC, 50–60 Hz
- Off mode: 0.3 W (typ.)
- On mode: 43.74 W (typ.) (EnergyStar 7.0 test method)
- Standby mode: 0.5 W (typ.)
- Power LED indicator: Operation - White, Standby mode - White (flashing)

Dimensions

- Packaging in mm (W x H x D): 1043 x 731 x 304 mm
- Product without stand (mm): 909 x 532 x 72 mm
- Product with stand (max height): 909 x 643 x 247 mm

Weight

- Product with packaging (kg): 16.42 kg
- Product with stand (kg): 11.6 kg
- Product without stand (kg): 11.3 kg

Operating conditions

- Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
- Temperature range (operation): 0°C to 40°C °C
- MTBF: 70,000 hrs (excluded backlight) hour(s)
- Relative humidity: 20–80% %
- Temperature range (storage): -20°C to 60°C °C

Sustainability

- Environmental and energy: EnergyStar 7.0, RoHS
- Recyclable packaging material: 100 %
- Specific Substances: Mercury free

Compliance and standards

- Regulatory Approvals: WEEE, CECP, PSE, VCCI, BSMI, CE Mark, cETLus, CU-EAC, EPA, FCC Class B, ICES-003, J-MOSS, KUCAS, PSB, RCM, SASO, SEMKO, TUV Ergo, TUV/GS, UKRAINIAN, MEPS

Cabinet

- Finish: Glossy
- Foot: Silver
- Front bezel: Silver
- Rear cover: White

What's in the box?

- Cables: D-Sub cable, DP cable, HDMI cable, Audio cable, Power cable
- Monitor with stand
- User Documentation



Issue date 2024-04-26

Version: 4.0.1

EAN: 87 12581 74113 6

© 2024 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com

* This Philips display is MHL-certified. However, if your MHL device does not connect or work correctly, check with your MHL device FAQ or vendor directly for instructions. The policy of your device manufacturer may require you to purchase its brand-specific MHL cable or adapter in order for it to work

* Requires optional MHL-certified mobile device and MHL cable (not included). Please check with your MHL device vendor for compatibility.

* Standby/Off energy saving of ErP is not applicable for the MHL charging functionality

* For a complete list of MHL-enabled products, refer to www.mhlconsortium.org

* Radius of the arc of the display curvature in mm

* Fast charging complies with USB BC 1.2 standard

* Response time value equal to SmartResponse

* Four inputs required for four systems on one screen.

* NTSC 85% (CIE1931), sRGB: 123%