



Philips Brilliance  
LCD monitor with USB-C  
docking

### P Line

32 (viewable 31.5"/80 cm)  
2560 x 1440 (QHD)



328P6AUBREB

## Simplify your connections

with USB-C docking monitor

This Philips Brilliance monitor with USB-C docking replaces cable clutter. View QHD images, secure connect to intranet and re-charge your notebook all at the same time with a single USB-C cable.

#### Single cable USB-C connection

- Built-in RJ-45 Ethernet gives data security
- Built-in USB-C docking station
- Connect your notebook with one USB-C cable
- Power and re-charge compatible notebook from the monitor
- USB 3.1 high-speed data transfer
- View Crystalclear QHD 2560 x 1440 images

#### Sustainable Eco-design

- PVC-BFR free housing
- 100% recyclable packaging

#### True-to-life colourful images

- High Dynamic Range (HDR) for more lifelike colourful visuals
- LowBlue Mode for easy-on-the-eyes productivity
- Pro colour standards 99% Adobe RGB, 100% sRGB
- 10-bit IPS technology for full colours and wide viewing angle

**PHILIPS**

# Highlights

## Built-in USB-C docking station



This Philips display features a built-in USB type-C docking station with power delivery. Its slim, reversible USB-C connector allows for easy, one-cable docking. Keep it simple by connecting all your peripherals, like your keyboard, mouse and your RJ-45 Ethernet cable to the monitor's docking station. Simply connect your notebook to this monitor with a single USB-C cable to watch high-resolution video and transfer super-speed data while powering up and recharging your notebook at the same time.

## USB-C connection



This Philips display features a USB type-C connector with power delivery. With intelligent and flexible power management, you can power charge your compatible device directly. Its slim, reversible USB-C allows for easy, one-cable connection. You can watch high-resolution video and transfer data at super speed, while powering up and recharging your compatible device at the same time.

## Power and re-charge notebook

This monitor features a built-in USB-C connector that meets USB Power Delivery standard. With intelligent and flexible power management, you can now power up and/or

re-charge your compatible\* Notebook directly from the Monitor using a single USB-C cable.

## Crystalclear QHD images

These Philips screens deliver CrystalClear, Quad HD 2560 x 1440 or 2560 x 1080 pixel images. Utilising high-performance panels with high-density pixel count, enabled by high-bandwidth sources like USB-C, Displayport, HDMI and Dual-link DVI, these new displays will make your images and graphics come alive. Whether you are a demanding professional requiring extremely detailed information for CAD-CAM solutions, are using 3D graphic applications or are a financial wizard working on huge spreadsheets, Philips displays will give you CrystalClear images.

## High-speed data transfer


USB 3.1 high-speed data transfer

## Built-in RJ-45 Ethernet



Built-in RJ-45 Ethernet gives data security

## High Dynamic Range (HDR)

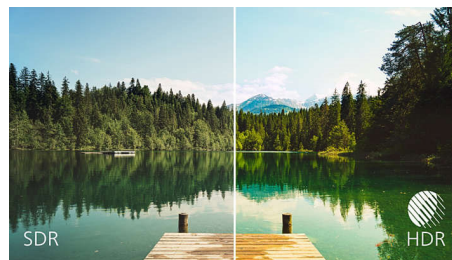

High Dynamic Range delivers a dramatically different visual experience. With astonishing brightness, incomparable contrast and captivating colour, images come to life with much greater brightness while also featuring much deeper, more nuanced darks. It renders


a fuller palette of rich new colours never before seen on a display, giving you a visual experience that engages your senses and inspires emotions.

## AdobeRGB



Meeting professional industry-standard colour, this monitor offers Adobe 99% and 100% sRGB colour spectrum. The enhanced colour rendering range of Adobe RGB makes it ideal for professional photo and video editing, animation or work with colour-critical projects. You can now be confident that your colour is consistent and true to the original image.

## 10-bit IPS display technology

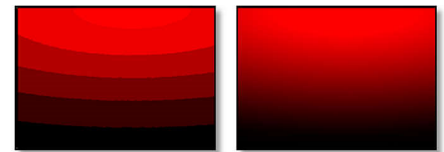

8-bit

10-bit

This Philips monitor uses a native 10-bit wide view angle display. This enables you to view consistent and smooth images with a colour depth of 1.07 billion colours, vs an 8-bit display which is limited to only 16 million possible colours. With a suitable graphics card and appropriate software, you can now work on your colour-critical professional work with ease.



USB-C Docking



HDR



Adobe RGB Color



LowBlue Mode



Quad HD



SmartErgo Base



Wide Viewing Angle



USB-C Docking



Ethernet

# Specifications

## Connectivity

- Signal Input: VGA (Analogue), DisplayPort 1.2, HDMI 2.0 x 1, USB-C 3.1 Gen 1 x 1, USB 3.1 Gen 1 x 2 (downstream, w/fast charging BC 1.2)\*
- Sync Input: Separate Sync, Sync on Green
- Audio (In/Out): PC audio-in, Headphone out
- RJ45: Ethernet LAN up to 1G\*

## Picture/Display

- Panel Size: 31.5 inch/80.1 cm
- Aspect ratio: 16:9
- LCD panel type: IPS technology
- Backlight type: W-LED system
- Pixel pitch: 0.2727 x 0.2727 mm
- Optimum resolution: 2560 x 1440 @ 60Hz
- Brightness: 450 cd/m<sup>2</sup>
- Display colours: Colour support 1.07 billion colours
- Colour gamut (typical): Adobe RGB 99% (CIE 1976)
- Contrast ratio (typical): 1200:1
- SmartContrast: 50,000,000:1
- Response time (typical): 4 ms (Grey to Grey)\*
- Viewing angle: 178° (H)/178° (V), @ C/R &gt; 10
- Picture enhancement: SmartImage
- Effective viewing area: 698.11 (H) x 392.69 (V)
- Scanning Frequency: Horizontal: 30-99 KHz (VGA/DP/USB type-C); 30-160 KHz (HDMI) / Vertical: 56-76 Hz
- sRGB
- Delta E: &lt; 2
- Flicker-free
- Pixel Density: 93 PPI
- LowBlue Mode
- Display Screen Coating: Anti-Glare, 3H, Haze 25%
- SmartUniformity: 96% ~ 103%
- EasyRead
- HDR: DisplayHDR 400 (HDMI)

## USB

- Power delivery: USB PD version 2.0
- Super speed: Data and Video transfer
- DP: Built-in Display Port Alt mode
- USB-C max. power delivery: Up to 60 watts (5V/3A; 7V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3A)
- USB-C: Reversible plug connector

## Convenience

- Built-in Speakers: 3 W x 2
- Plug and Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 10 / 8.1 / 8 / 7
- User convenience: SmartImage, Input, Brightness, Menu, Power On/Off
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish,

- Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, VESA mount (100 x 100 mm)
- Control software: SmartControl

## Stand

- Height adjustment: 180 mm
- Pivot: 90 degree
- Swivel: -170/+170 degree
- Tilt: -5/20 degree

## Power

- ECO mode: 31.9 W (typ.)
- Power supply: Built-in, 100–240 VAC, 50–60 Hz
- Off mode: Zero watts with Zero switch
- On mode: 23.72 W (EnergyStar test method)
- Standby mode: &lt;0.5 W (typ.)
- Power LED indicator: Operation - White, Standby mode - White (flashing)
- Energy Label Class: E

## Dimensions

- Packaging in mm (W x H x D): 970 x 526 x 224 mm
- Product without stand (mm): 742 x 438 x 63 mm
- Product with stand (max height): 742 x 657 x 270 mm

## Weight

- Product with packaging (kg): 13.86 kg
- Product with stand (kg): 9.70 kg
- Product without stand (kg): 6.74 kg

## Operating conditions

- Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
- Temperature range (operation): 0°C to 40 °C
- Relative humidity: 20%-80 %
- Temperature range (storage): -20°C to 60 °C
- MTBF (demonstrated): 70,000 hrs (excluded backlight)

## Sustainability

- Environmental and energy: EnergyStar 8.0, EPEAT\*, RoHS
- Post-consumer recycled plastic: 65%
- Recyclable packaging material: 100 %
- Specific Substances: PVC/BFR free housing, Mercury free

## Compliance and standards

- Regulatory Approvals: CE Mark, FCC Class B, VCCI, RCM, BSMI, ICES-003, J-MOSS, cETLus, EPA, PSB, CU-EAC, SASO, KUCAS, UKRAINIAN, PSE, CECF, WEEE, TUV Ergo, TUV/GS, CB

## Cabinet

- Finish: Texture
- Foot: Black
- Front bezel: Black
- Rear cover: Black

## What's in the box?

- Cables: D-Sub cable, DP cable, HDMI cable, USB-C to USB-C cable, USB-C to USB-A cable, Power cable, Audio cable
- Monitor with stand
- User Documentation



I/O back panel connector diagram



Issue date 2024-04-11

Version: 10.0.2

EAN: 87 12581 74808 1

© 2024 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)

\* Response time value equal to SmartResponse

\* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode

\* Activities such as screen sharing and online streaming over the Internet can impact your network performance. Your hardware and network bandwidth will determine the overall audio and video quality.

\* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.

\* If your Ethernet connection seems slow, please enter the OSD menu and select USB 3.0 or a higher version that can support the LAN speed up to 1G.

\* EPEAT rating is valid only where Philips registers the product. Please visit <https://www.epeat.net/> for registration status in your country.

\* The monitor may look different from feature images.