

Philips Signage Solutions  
H-Line Display

55"  
2500cd/m<sup>2</sup>  
Full HD

55BDL6002H



## Turn heads

High-brightness 24/7 display.

Stay visible day and night with Philips H Line Full HD Panel. Astonishing clarity and contrast make this a perfect solution for busy areas that are subject to high ambient light. From airports to shopping centres.

### **Brilliant picture. High brightness.**

- Full HD. Clear images. Crisp contrast
- High brightness (2500 cd/m<sup>2</sup>). Suited to semi-outdoor use
- Automated light output with optional external light sensor

### **Effortless setup. Total control.**

- Operate, monitor and maintain with CMND & Control
- CMND & Create. Develop and launch your own content
- Remote system management through CMND
- Add Android processing power with an optional CRD50 module

### **Versatile system solution**

- Energy-saving automatic backlight control
- FailOver ensures content is always playing
- OPS slot allows for PC embedding without cabling

**PHILIPS**

# Highlights


## Optional CRD50 module

Embed an Android System-on-Chip (SoC) in your Philips Professional Display. The optional CRD50 module is an OPS device that enables Android processing power without the need for cables. Simply slide into the OPS slot, which contains all the connections needed to run the module (including power supply).

## CMND

Take control of your Philips Professional Display network. CMND lets you manage, update, maintain, and play via one easy-to-use interface. From installation to daily operation.

## CMND & Control




Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

## CMND & Create




Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure your stills, text, and video will be up and running in no time.

## FailOver

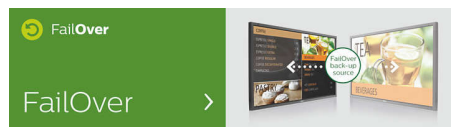

From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

## OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

## High brightness (2,500 cd/m<sup>2</sup>)

Make a big impact in bright or semi-outdoor locations. This ultra-high-brightness 2500 cd/m<sup>2</sup> display is perfect for attracting attention in large, busy areas that are subject to high ambient light.

## Energy-saving

Energy-saving automatic backlight control

## Automated light

Automated light output with optional external light sensor

## Full HD. Clear images. Crisp

Full HD. Clear images. Crisp contrast

# Specifications

## Connectivity

- Audio output: 3.5mm jack, External speaker connector
- Video input: Composite (Share component Y), Display Port1.2 (x1), DVI-D (x1), HDMI 1.4 (x2), VGA (Analog D-Sub) (x1), Component (BNC x3)
- Audio input: 3.5 mm jack, Audio Left/Right (RCA)
- Other connections: OPS, USB 2.0 (x1)
- Video output: DisplayPort 1.2 (x1), DVI-I (x1)
- External control: RS232C (in/out) 2.5 mm jack, RJ45, IR (in/out) 3.5 mm jack

## Picture/Display

- Diagonal screen size (metric): 138.7 cm
- Diagonal screen size (inch): 54.6 inch
- Aspect ratio: 16:9
- Panel resolution: 1920x1080p
- Pixel pitch: 0.63 x 0.63 mm
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 2500 cd/m<sup>2</sup>
- Display colors: 1.07 B
- Contrast ratio (typical): 4000 : 1
- Dynamic contrast ratio: 500,000 : 1
- Response time (typical): 8 ms
- Viewing angle (horizontal): 178 degree
- Viewing angle (vertical): 178 degree

## Convenience

- Placement: Landscape, Portrait
- Screen saving functions: Pixel Shift, Low Brightness
- Keyboard control: Hidden, Lockable
- Remote control signal: Lockable
- Signal loop through: RS232, IR Loophrough, DisplayPort, IR, RJ45
- Ease of installation: Carrying Handles, Smart Insert
- Energy saving functions: Smart Power
- Other convenience: Carrying handles
- Picture performance: Advanced color control
- Network controllable: RS232, RJ45

## Sound

- Built-in speakers: 2 x 10W RMS

## Power

- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz
- Consumption (Typical): 295 W
- Consumption (Max): 420 W
- Standby power consumption: <math>\leq 0.5W</math>

## Supported Display Resolution

- Computer formats: 1024 x 768, 60, 75Hz, 1280 x 1024, 60Hz, 1280 x 768, 60Hz, 1280 x 800, 60Hz, 1280 x 960, 60Hz, 1360 x 768, 60Hz, 1366 x 768, 60Hz, 1600 x 1200, 60Hz, 1920 x 1080, 60Hz, 640 x 480, 60, 72, 75Hz, 720 x 400, 70Hz, 800 x 600, 60, 75Hz
- Video formats: 1080i, 25, 30Hz, 1080p, 50, 60Hz, 720p, 50, 60Hz

## Dimensions

- Smart Insert mount: 100mm x 100mm pitch, 6xM4L6
- Set Width: 1243.2 mm
- Product weight: 31.84 kg
- Set Height: 714 mm
- Set Depth: 137.7 mm
- Set Width (inch): 48.9 inch
- Set Height (inch): 28.1 inch
- Wall Mount: 400 x 400 mm, M6
- Set Depth (inch): 5.42 inch
- Bezel width: 13.6 mm (Even bezel)
- Product weight (lb): 70.20 lb
- Smart insert height: 200 mm

## Operating conditions

- Altitude: 0 ~ 3000 m
- Temperature range (operation): 0 ~ 40 °C
- MTBF: 50,000 hour(s)
- Temperature range (storage): -20 ~ 60 °C
- Humidity range (operation)[RH]: 20 ~ 80% RH (No condensation)
- Humidity range (storage) [RH]: 5 ~ 95% RH (No condensation)

## Multimedia Applications

- USB Playback Video: ISM, M2TS, M4V, Manifest, MK3D, MKV, MP4, MPD, MPEG, MPG, MT2, MTS, TS, VOB
- USB Playback Picture: BMP, GIF, JPEG, JPG, PNG
- USB Playback Audio: AAC, AIF, AIFF, ASF, M3U, M4A, MP3, MP4, PLS, WAV, WMA


## Accessories

- Included accessories: AC Power Cord, Quick start guide, RS232 cable, Remote Control & AAA Batteries
- Included Accessories: RS232 daisy-chain cable, Edge Alignment Kit (1) -1 pcs, Edge Alignment Kit

- (2) - 2 pcs, Philips logo (x1), Thumbscrew (8pcs)

## Miscellaneous

- On-Screen Display Languages: English, French, German, Italian, Polish, Russian, Spanish, Turkish, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Portuguese
- Warranty: 3 year warranty
- Regulatory approvals: CB, CE, UL/cUL, EAC, EMF, FCC, Class A, PSB, PSE, VCCI

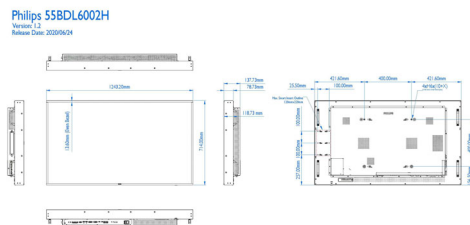

Issue date 2024-03-25

Version: 5.1.1

EAN: 87 12581 76871 3

© 2024 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)