



Philips Signage Solutions
H-Line Display

55"
2500cd/m²
Full HD

SignageSolutions

55BDL3002H

Turn heads

High-brightness 24/7 display.

Stay visible day and night with a Philips H-Line High-brightness Professional Full HD Display. Astonishing clarity and contrast make this a perfect solution for window displays and bright locations. From museums to retail.

Brilliant picture. High brightness.

- Full HD. Clear images. Crisp contrast
- High brightness (2500 cd/m²). Suited to semi-outdoor use
- Automated light output with optional external light sensor

Effortless setup. Total control.

- Add Android processing power with an optional CRD50 module
- Remote system management through CMND
- Operate, monitor and maintain with CMND & Control
- CMND & Create. Develop and launch your own content

Versatile system solution

- Energy-saving automatic backlight control
- FailOver ensures content is always playing
- OPS slot allows for PC embedding without cabling

PHILIPS

Highlights

Optional CRD50 module

Embed an Android System-on-Chip (SoC) in your Philips Professional Display. The optional CRD50 module is an OPS device that enables Android processing power without the need for cables. Simply slide into the OPS slot, which contains all the connections needed to run the module (including power supply).

CMND

Take control of your Philips Professional Display network. CMND lets you manage, update, maintain, and play via one easy-to-use interface. From installation to daily operation.

CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs


and monitoring display status. Whether you're in charge of one screen or 100.

CMND & Create



Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure your stills, text, and video will be up and running in no time.


FailOver



From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically

between primary and secondary inputs ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

High brightness (2,500 cd/m²)

Make a big impact in bright or semi-outdoor locations. This ultra-high-brightness 2500 cd/m² display is perfect for attracting attention in large, busy areas that are subject to high ambient light.

Specifications

Picture/Display

- Diagonal screen size: 55 inch / 139.7 cm
- Panel technology: SVA
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 2500 cd/m²
- Contrast ratio (typical): 5000:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 6 ms
- Pixel pitch: 0.63 x 0.63 mm
- Display colors: 16.7 M (8 bits)
- Viewing angle (H / V): 178 / 178 degree
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, 3D MA deinterlacing, Dynamic contrast enhancement, Motion compens. deinterlacing, Progressive scan
- Panel resolution: 1920x1080p

Connectivity

- Video input: VGA (Analog D-Sub), DisplayPort (1.2), DVI-D, Component (BNC), Composite (BNC), HDMI (x2)
- Video output: DisplayPort, DVI-I
- Audio input: 3.5 mm jack, Audio Left/Right (RCA)
- Audio output: 3.5mm jack
- External control: RS232C (in/out) 2.5 mm jack, RJ45, IR (in/out) 3.5 mm jack
- Other connections: AC-out, OPS, USB

Dimensions

- Bezel width: 15.6 mm
- Set dimensions (W x H x D): 1242.2 x 713 x 137.9 mm
- Set dimensions in inch (W x H x D): 48.9 x 28.1 x 5.43 inch
- Wall Mount: 400 x 400 mm, M6
- Product weight: 35.8 kg
- Product weight (lb): 78.94 lb
- Smart insert height: 200 mm
- Smart insert width: 100 mm

Convenience

- Placement: Landscape, Portrait
- Network controllable: RS232, HDMI (One Wire), LAN (RJ45)
- Signal loop through: RS232, IR Loopthrough
- Energy saving functions: Smart Power

- Remote control signal: Lockable
- Keyboard control: Hidden, Lockable
- Ease of installation: Smart Insert, Edge Alignment Kit
- Other convenience: Carrying handles
- Screen saving functions: Pixel Shift, Low Brightness
- Picture performance: Advanced color control

Power

- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz
- Consumption (Typical): 368 W
- Standby power consumption: <0.5W

Sound

- Built-in speakers: 2 x 10W RMS

Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80(operation), 5 - 95% (storage) %
- MTBF: 50,000 hour(s)
- Altitude: 0 ~ 3000 m

Accessories

- Included accessories: AC Power Cord, Batteries for remote control, Quick start guide, Remote Control, Edge alignment plates, RS232 cable
- Optional accessories: IR Light Motion Sensor (CRD41), Table top stand
- Included Accessories: RS232 daisy-chain cable

Miscellaneous

- On-Screen Display Languages: English, French, German, Italian, Polish, Russian, Spanish, Turkish, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Portuguese
- Regulatory approvals: BSMI, CB, CE, FCC, Class B, UL/cUL
- Warranty: 3 year warranty

Multimedia Applications

- USB Playback Audio: AAC, AIF, AIFF, ASF, LPCM, M3U, M4A, MP3, MP4, WAV, WMA
- USB Playback Picture: BMP, GIF, JPEG, JPG
- USB Playback Video: M2TS, M4V, MK3D, MKV, MP4, MPEG, MPG, MTS, TS, TTS, VOB, WMV


Supported Display Resolution

• Computer formats

| Resolution | Refresh rate |
|-------------|------------------|
| 1024 x 768 | 60Hz |
| 1280 x 1024 | 60Hz |
| 1280 x 768 | 60Hz |
| 1280 x 800 | 60Hz |
| 1360 x 768 | 60Hz |
| 1600 x 1200 | 60Hz |
| 1920 x 1080 | 60Hz |
| 1920 x 1200 | 60Hz |
| 640 x 480 | 60, 67, 72, 75Hz |
| 720 x 400 | 70Hz |
| 800 x 600 | 60, 72, 75Hz |

• Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 1080i | 25, 30Hz |
| 1080p | 50, 60Hz |
| 480i | 30, 60Hz |
| 480p | 60Hz |
| 576i | 25, 50Hz |
| 576p | 50Hz |
| 720p | 50, 60Hz |

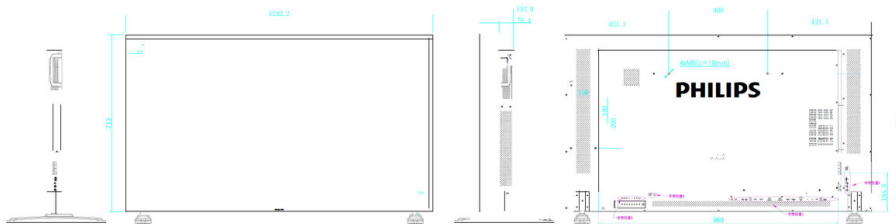

Issue date 2022-07-14

Version: 2.0.1

12 NC: 8670 001 49216
EAN: 87 12581 74850 0

© 2022 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com