

# PHILIPS

4K UHD monitor  
with USB-C docking

Business Monitor

3000 series

32 (31.5"/80 cm diag.)

3840 x 2160 (4K UHD)

32B1U3900



## Daily routine simplified

This 32 inch monitor showcases beautiful imagery in 4K resolution and a 1.074 billion colour gamut. In addition, its USB-C connection allows you to easily connect peripherals during a busy workday.

### Excellent performance

- VA display delivers awesome images with wide viewing angles
- SmartImage pre-sets for easy optimised image settings
- UltraClear 4K UHD (3840 x 2160) resolution for precision
- 1.074 billion colours for smooth colour gradations and detail

### Designed for the way you work

- Built-in stereo speakers for multimedia
- SmartErgoBase enables user-friendly ergonomic adjustments
- DisplayPort connection for maximum visuals
- HDMI ensures universal digital connectivity
- Less eye fatigue with Flicker-Free technology
- LowBlue Mode for easy-on-the-eyes productivity
- EasyRead mode for a paper-like reading experience

### Single cable USB-C connection

- Built-in USB-C docking station


## Highlights

### Built-in USB-C docking station



This Philips display features a built-in USB type-C docking station with power delivery. Its slim, reversible USB-C connector allows for easy, one-cable docking. Keep it simple by connecting all your peripherals, like your keyboard, mouse and your RJ-45 Ethernet cable to the monitor's docking station. Simply connect your notebook to this monitor with a single USB-C cable to watch high-resolution video and transfer super-speed data while powering up and recharging your notebook at the same time.

### VA display

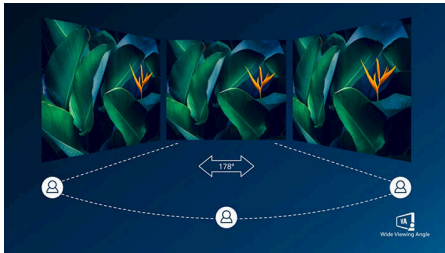


The Philips VA LED display uses an advanced multi-domain vertical alignment technology that gives you super-high static contrast ratios for extra-vivid and bright images. While standard office applications are handled with ease, it is especially suitable for photos, web browsing, films, gaming and demanding graphical applications. Its optimised pixel management technology gives you a 178/178 degree extra-wide viewing angle, resulting in crisp images.

### 10-bit colours



The 10-bit display delivers rich colour depth with 1.074 billion colours and 12-bit internal processing for recreating smooth, natural colours without gradations and colour banding.

### UltraClear 4K UHD Resolution

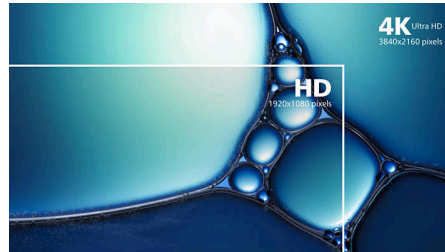

These Philips displays utilise high-performance panels to deliver UltraClear, 4K UHD (3840 x 2160) resolution images. Whether you are a demanding professional requiring extremely detailed images for CAD solutions, a user of 3D graphics applications or a financial wizard working on huge spreadsheets, Philips displays will make your images and graphics come alive.

### SmartImage



SmartImage is an exclusive leading edge Philips technology that analyses the content displayed on your screen and optimises your display performance. This user-friendly interface allows you to select various modes, like Office, Photo,

Movie, Game, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimises the contrast, colour saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time at the touch of a single button!

### DisplayPort connection



DisplayPort is a digital link from PC to monitor without any conversion. With higher capabilities than DVI standard, it is fully capable to support up to 15 metre cables and 10.8 Gbps/sec data transfer. With this high performance and zero latency, you get the fastest imaging and refresh rates — making DisplayPort the best choice for not only general office or home use, but also for the more demanding gaming and films, video editing and more. It also keeps interoperability in mind via the use of various adapters.

### HDMI Ready




An HDMI-ready device has all the required hardware to accept High-Definition Multimedia Interface (HDMI) input. An HDMI cable enables high-quality digital video and audio to be transmitted over a single cable from a PC or any number of AV sources (including set-top boxes, DVD players, A/V receivers and video cameras).



## Highlights

### Flicker-Free technology

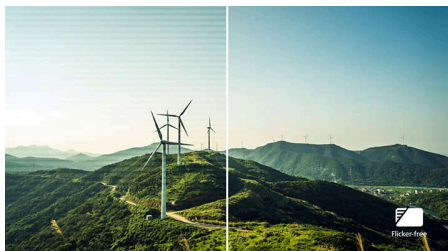

Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-Free technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

### LowBlue Mode



Studies have shown that just as ultra-violet rays can cause eye damage, shortwave-length blue light rays from LED displays can cause eye damage and affect vision over time. Developed

for wellbeing, the Philips LowBlue Mode setting uses a smart software technology to reduce harmful shortwave blue light.

### EasyRead mode




EasyRead mode for a paper-like reading experience

### Built-in stereo speakers



A pair of high-quality stereo speakers built into a display device. They may be visible front firing, or invisible down firing, top firing, rear firing etc. depending on model and design.

### SmartErgoBase

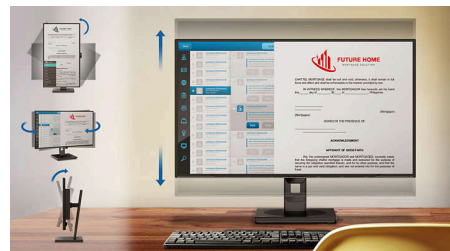

The SmartErgoBase is a monitor base that delivers ergonomic display comfort and provides cable management. The base can swivel, tilt and rotate to various angles to ensure maximum comfort. The height-adjustable stand guarantees the optimal viewing level, reducing the physical strains of a long workday, while cable management reduces cable clutter and keeps the workspace neat and professional.



USB-C Docking



Wide Viewing Angle



4K  
Ultra HD



SmartImage™



D®



HDMI™  
HIGH DEFINITION MULTIMEDIA INTERFACE

## Specifications

### Picture/Display

**Panel Size:** 31.5"/80 cm  
**Aspect ratio:** 16:9  
**LCD panel type:** VA LCD  
**Backlight type:** W-LED system  
**Pixel pitch:** 0.18159 x 0.18159 mm  
**Brightness:** 350 cd/m<sup>2</sup>  
**Display colours:** 1.07 B (10 bits)\*  
**Colour gamut (typical):** sRGB 122%, NTSC 106 %  
\*  
**Contrast ratio (typical):** 3500:1  
**SmartContrast:** 50,000,000:1  
**Response time (typical):** 4 ms (Grey to Grey)\*  
**Viewing angle:** 178° (H)/178° (V), @ C/R > 10  
**Picture enhancement:** SmartImage  
**Maximum resolution:** 3840 x 2160@60 Hz  
**Effective viewing area:**  
697.306 (H) x 392.234 (V) mm  
**Scanning Frequency:** 30–140 kHz (H)/23–75 Hz (V)  
sRGB  
Flicker-free  
Pixel Density: 140 PPI  
LowBlue Mode  
**Display Screen Coating:** Anti-Glare, 3H, Haze 25%  
EasyRead

### Connectivity

**Signal Input:** HDMI 2.0 x 2, DisplayPort 1.4 x 1, USB-C x 1 (upstream, DP Alt mode, Data, PD up to 90 W)  
**Sync Input:** Separate Sync  
**Audio (In/Out):** Audio out  
**RJ45:** Ethernet LAN up to 1 G\*  
**HDCP:** HDCP 1.4 (HDMI/DisplayPort/USB-C); HDCP 2.2 (HDMI/DisplayPort/USB-C)  
**USB Hub:** USB3.2, Gen1, 5G; upstream: USB-C x 1 ;downstream: USB-A x 4 (with x 1 fast charge B.C 1.2)

### Power Delivery

**Max power delivery:** USB-C up to 90 W\* (5V/3A, 7V/3A, 9V/3A, 10V/3A, 12V/3A, 15V/3A, 20V/4.5A)  
**Version:** USB PD version 3.0

### Convenience

**Built-in Speakers:** 3 W x 2  
**Plug and Play Compatibility:** DDC/CI, Mac OS, sRGB, Windows 11/10

**User convenience:** SmartImage, Input, Brightness, Menu, Power On/Off  
**OSD Languages:** Brazil Portuguese, Czech, Dutch, English, French, Finnish, German, Greek, Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian  
**Other convenience:** Kensington lock, VESA mount (100 x 100 mm)  
**Control software:** SmartControl  
**MultiView:** PIP/PBP mode, 2 x devices

### Stand

**Height adjustment:** 180 mm  
**Pivot:** -/+90 degree  
**Swivel:** -/+ 180 degree  
**Tilt:** -5/25 degree

### Power

**ECO mode:** 20.4 W (typ.)  
**Power supply:** Built-in, 100–240 VAC, 50–60 Hz  
**Off mode:** 0.3 W (typ.)  
**On mode:** 34.8 W (typ.)  
**Standby mode:** 0.3 W (typ.)  
**Power LED indicator:** Operation - White, Standby mode - White (flashing)  
**Energy Label Class:** F

### Dimensions

**Packaging in mm (W x H x D):** 930 x 563 x 186 mm  
**Product without stand (mm):** 714 x 422 x 62 mm  
**Product with stand (max height):** 714 x 631 x 280 mm

### Weight

**Product with packaging (kg):** 16.23 kg  
**Product with stand (kg):** 11.47 kg  
**Product without stand (kg):** 7.56 kg

### Operating conditions

**Altitude:** Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)  
**Temperature range (operation):** 0°C to 40 °C  
**Relative humidity:** 20%-80 %  
**Temperature range (storage):** -20°C to 60 °C  
**MTBF (demonstrated):** 70,000 hrs (excluded backlight)

### Sustainability

**Environmental and energy:** RoHS  
**Post-consumer recycled plastic:** 85%  
**Recyclable packaging material:** 100 %  
**Specific Substances:** PVC/BFR free housing, Mercury free, Lead-free

### Compliance and standards

**Regulatory Approvals:** CB, CE Mark, TUV/GS, TUV Ergo, EAC, EAEU RoHS, MEPS, UKCA, EMF, FCC, ICES-003

### Cabinet

**Finish:** Texture  
**Foot:** Black/Black  
**Front bezel:** Black/Black  
**Rear cover:** Black/Black

### What's in the box?

**Cables:** HDMI cable, DisplayPort cable, USB-C to C cable, Power cable  
**Monitor with stand**  
**User Documentation**



\* The speed of Ethernet LAN will vary depending on the USB port used. For USB 2.0, the maximum speed is 10 M/100 M, while USB 3.2 supports speeds up to 1 G.  
\* Response time value equal to SmartResponse  
\* sRGB Area based on CIE1931, NTSC Area based on CIE1976.  
\* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode  
\* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.  
\* The USB-C power delivery of this display is up to 90 W; the maximum power delivery will depend on your device.  
\* At a maximum resolution of 3840 x 2160, 10 bit colour depth can only be reached at 60 Hz with a DisplayPort connection. For more information, please check the user manual.  
\* The products and accessories listed on this leaflet may differ by country and region.  
\* The monitor may look different from feature images.