PHILIPS

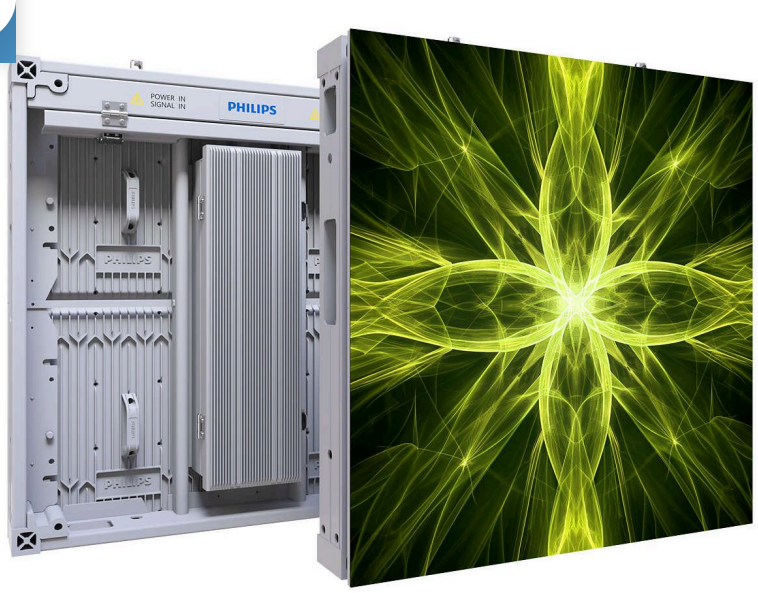

LED Display

Signage Solutions

28"

Direct View LED



28HUL7129DP

Philips Urban LED 7000 Series

Versatile brilliance. Outdoor mastery

Offering a series of fine pixel pitches, the range ensures high brightness for advertising displays at bus stations, arenas, airports, and more. Housed in a die cast aluminum cabinet, with front and rear access for simplified maintenance.

Efficient and versatile solution

- Fine pixel pitch outdoor fixed installations
- Range of cabinet sizes to suit space requirements
- Narrow pixel pitch options (mm) : 2.9, 3.9, or 4.8
- High brightness for optimal visibility
- Die cast aluminum cabinet
- Front and rear access for easier servicing and maintenance
- IP66 rated - resilient against environmental factors

28HUL7129DP/00

Highlights

Fine pixel pitch outdoor fixed installations

Adapted shader mask design for outdoor NPP solutions and the underlying technologies bring Philips Urban LED 7000 series unparalleled high contrast ratio and high refresh rate, delivering smooth broadcasting with more colour subtlety, shading, and saturation.

Range of cabinet sizes

The Philips Urban LED 7000 Series is designed to enable different cabinet sizes and pixel pitches to be mixed to create your perfect dimensions and enable many options for splicing.

High brightness

Make the ultimate impact with crisp, clear and vibrant content in bright locations. The high brightness Philips Urban LED 7000 Series ensures optimal viewing performance even in direct sunlight.

Front and rear access

All modules and components can be maintained from the front and rear. Modules can be unlocked from front or rear. The internal electronics are also easy to access for servicing or maintenance. Each of the LED modules in a cabinet can be unlocked using a T-hex tool, enabling removal of the module from the front or via the rear.

IP66 rated

Dustproof, waterproof, and salt spray resistant, IP66 tested and confirmed to meet ingress protection level 6.

Specifications

Picture/Display

Brightness after calibration: 4500
Brightness before calibration: 5000
Calibration(brightness/color): Color and Brightness
Color temperature adjust range: 3000~10000
Color temperature default: 8000
Contrast ratio: 7000:1
Bit-depth(bit): 14
Frame frequency (Hz): 50 & 60
Refresh rate(Hz): 3840 Hz (with CE report and cert.)
Viewing angle (°) H/V: 160/90

Power

Input voltage: AC100~240V (50 & 60Hz)
BTU/M2 (BC): 2250.60
BTU/M2 (AC): 2005.08
Cabinet Typical Power consumption (W) (AC): 58
Power consumption/M2 (W)(BC): 660
Power consumption/M2 (W)(AC): 588

Operating conditions

Temperature range (operation): -30~50 °C
Temperature range (storage): -40~60 °C
Humidity range (operation)[RH]: 10%-90%
Humidity range (storage) [RH]: 10%-90%
Working environment (indoor/outdoor): outdoor
IP Rating (front/rear): IP66/65

Cabinet

Cabinet area (m2): 0.25
Cabinet pixels (Dot): 28224
Cabinet resolution (W x H): 168x168 pixels
Data connector: Seetronic
Power connector: Seetronic
Weight (KG): 9.0±0.5kg
Cabinet diagonal (inch): 28"
Cabinet construction: Profile Aluminum
Cabinet Size (WxHxD in mm): 500x500x80.4
Control System: Novastar

Module

LED type: SMD
Pixel constitution: 1R1G1B
Module resolution (WxH pixels): 84x84
Pixel pitch (mm): 2.9
Module size (WxH in mm): 250x250
Weight(KG): 1±0.1kg
LED size: SMD1515
LED Lifetime (Hrs, half brightness): 100,000

Miscellaneous

Warranty: 36 months
Regulatory approvals: CB, CE, ETL, FCC
Certification: TUV, ITS

© 2025 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. or their respective owners.

Issue date 2025-09-22
Version: 9.9.1

EAN: 87 21038 10129 4

www.philips.com